


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC		DIST		REVISIONS			
P	LTR	DESCRIPTION		DATE	DWN	APVD	
	H2	REVISED PER ECO-11-004917		11MAR11	RK	HMR	

- △1 BRIGHT TIN-LEAD.
- △2 .000030 THICK NICKEL.
- △3 GOLD FLASH OVER .000030 NICKEL.
- △4 PLAIN.
- △5 MATTE TIN.
- △6 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

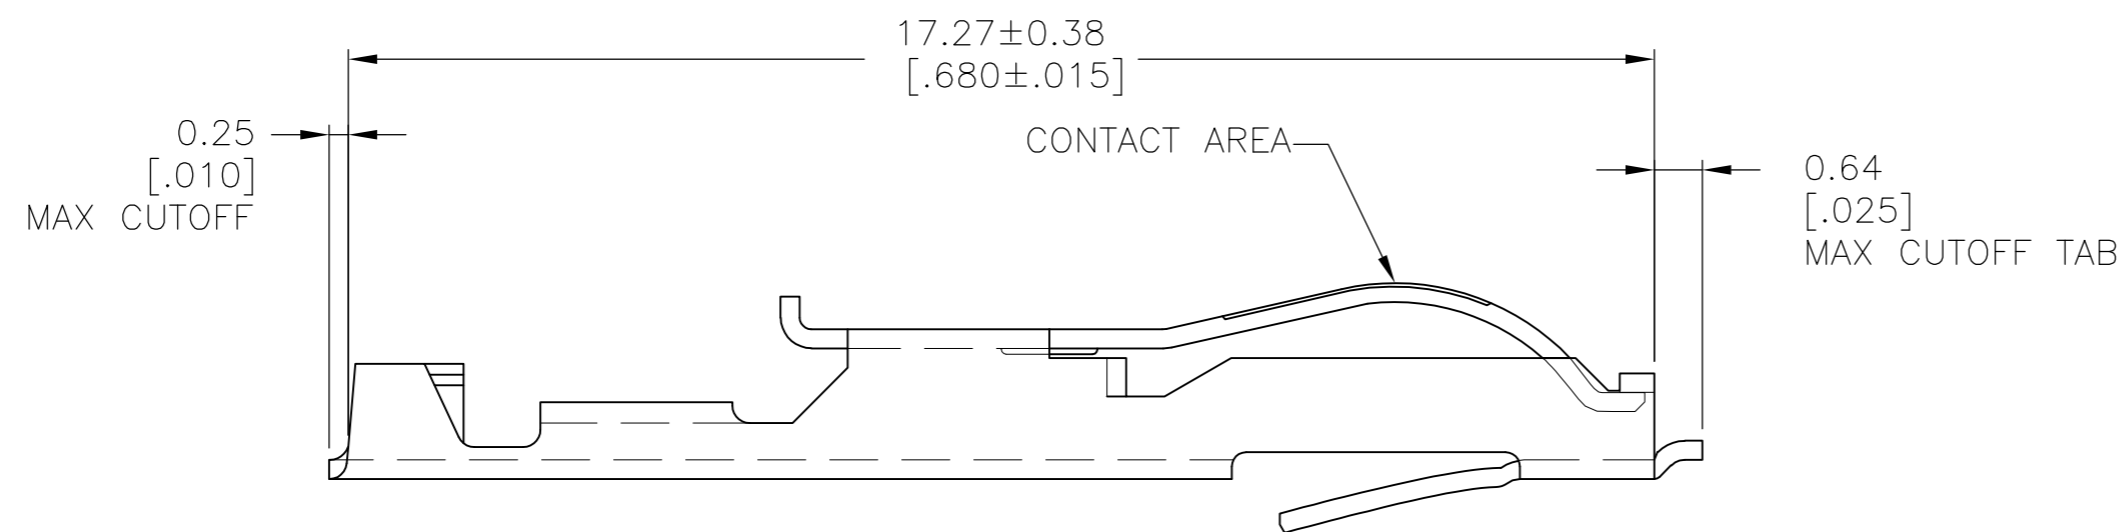

	△5	5-583857-5
SUPSD BY 583857-7	△4	583857-8
	△3	583857-7
△6 OBSOLETE	△2	583857-6
	△1	583857-5
PART NO.		

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	A. STAUB BG	02AUG93	STE TE Connectivity			
DIMENSIONS: mm [INCHES]		CHK	H ROSE	01MAR94				
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD	H ROSE	01MAR94	CONTACT TWIN LEAF PRE-CRIMPED			
0 PLC ± -		PRODUCT SPEC	-					
1 PLC ± -		APPLICATION SPEC	-		SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
2 PLC ± -		WEIGHT	-		A2	00779	C=583857	-
3 PLC ± -		MATERIAL		PHOS BRONZE	CUSTOMER DRAWING		SCALE	10:1
4 PLC ± -		FINISH		SEE TABLE	SHEET		1 of 1	REV
ANGLES ± -					H2			