## **Model P08x Series**

# **Electronics**

#### Features:

- 8 mm square
- Dust proof
- Detent option
- 100,000 cycle life
- Rotary switch option
- Multiple gangs available





#### Model Styles Available

MOUCH OTHICS AVAILABLE	
Side Adjust, Potentiometer Module (Up to 4 gangs)	P08xN
Side Adjust, Potentiometer with Rotary Switch Module (Up to 4 gangs)	P08xS
Side Adjust, Potentiometer with Dual Shaft Module (2 or 4 gang)	P08xD
Side Adjust, Potentiometer with Dual Shaft and Rotary Switch Module (2 or 4 gang)	P08xE

### **Electrical**

Resistance Range, Ohms	500 -1M (for "B" taper) 1K-1M (for other tapers)
Standard Resistance Tolerance	± 20%
Residual Resistance, Maximum	50 ohms
Input Voltage, Maximum	50 Vac
Power rating, Watts	0.05W- B taper, 0.025W- others
Dielectric Strength	300Vac, sea level
Insulation Resistance, Minimum	100 Megohms
Gang Error (Multi-ganged), Maximum	+/-3 dB (-40 dB to 0dB)
Actual Electrical Travel, Nominal	With Switch = 230° Without Switch =270°
Switch Contact Resistance, Maximum	100 milliohms max.
Switch Power Rated	3.0A at 16Vdc

## **Mechanical**

Total Mechanical Travel	300°± 10°
Static Stop Strength	42 oz-in
Rotational Torque, Maximum	0.7 oz-in ( 0.2 oz-in each additional gang)
Switch Detent,	1.0 oz-in
Switch Travel angle	50°

## Model P08x Series




#### **Environmental**


Operating Temperature Range		-55°C to +125°C
Rotational Life	Switch = 30,000 cycles	Potentiometer = 100,000 cycles
IP Rating		Dust Proof = IP50

### **Ordering**

#### P08xN - POTENTIOMETER MODULE

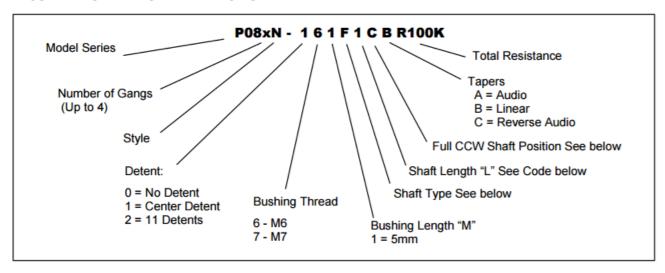


#### P08xS - POTENTIOMETER WITH ROTARY SWITCH MODULE

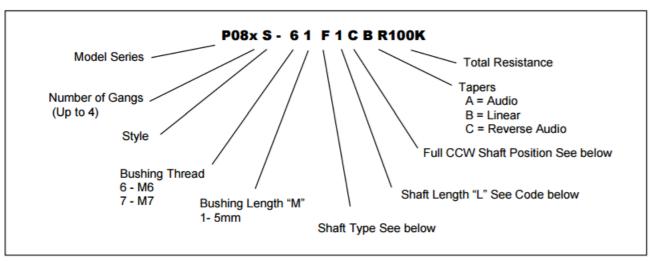


## Model P08x Series



#### P08xD - POTENTIOMETER WITH DUAL SHAFT MODULE

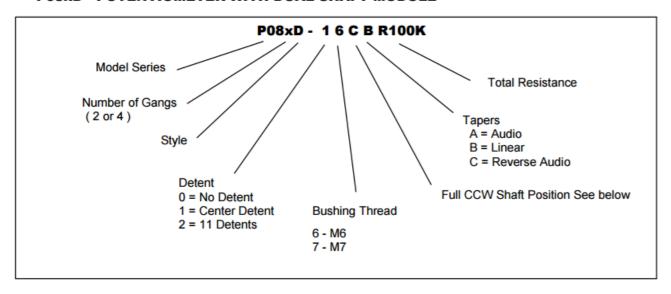


#### P08xE - POTENTIOMETER WITH DUAL SHAFT AND ROTARY SWITCH MODULE

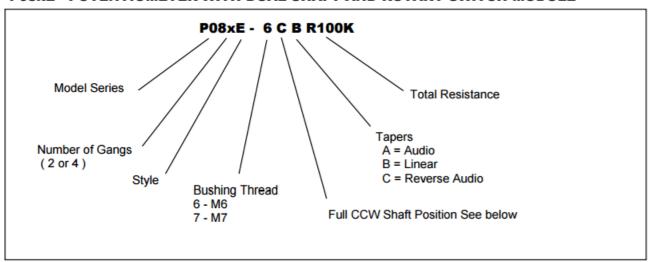


## Model P08x Series




#### Shaft Length "L" Code - For Models P08xN and P08xS only





#### Shaft Position (F-Type Shaft)

Dashed lines on Type "C" and Type "A" shows position of adjustment slot for S-Type

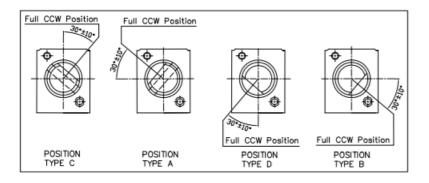


# STANDARD RESISTANCE VALUES, OHMS 500 1K 2K 5K 10K 20K 50K 100K 200K 500K 1MEG

www.ttelectronics.com/bi-technologies


## Model P08x Series



#### **P08xN - POTENTIOMETER MODULE**

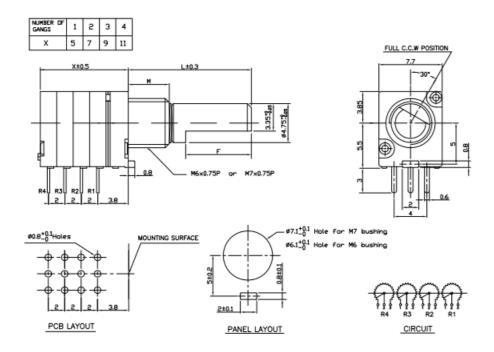

P08xS - POTENTIOMETER WITH ROTARY SWITCH MODULE

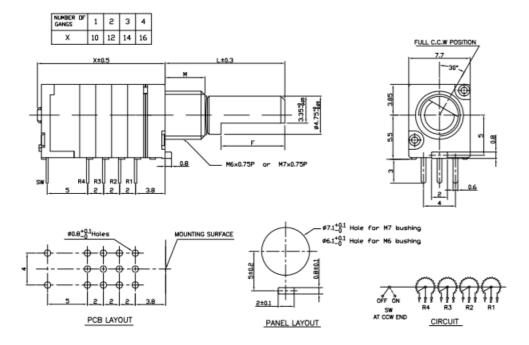


## Model P08x Series




#### P08xD - POTENTIOMETER WITH DUAL SHAFT MODULE

#### 2 GANG

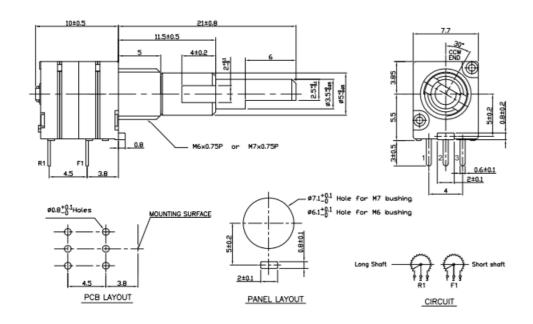

#### 4 GANG

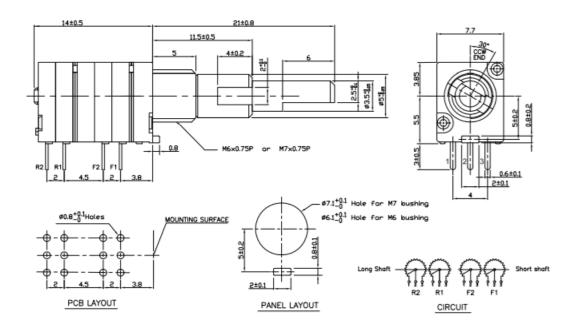


## Model P08x Series




#### P08xE - POTENTIOMETER WITH DUAL SHAFT AND ROTARY SWITCH MODULE

#### 2 GANG

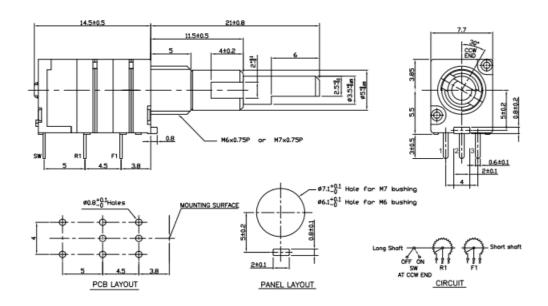

#### 4 GANG

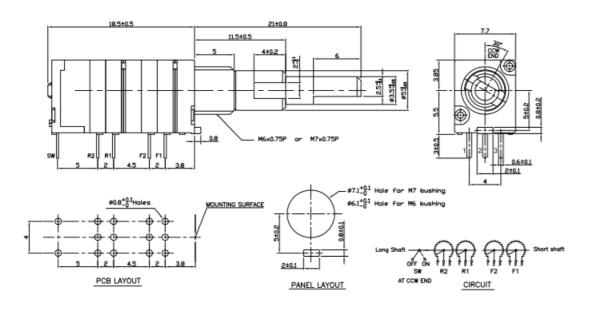

www.ttelectronics.com/bi-technologies

## **Model P08x Series**



