

UL 3385 Halogen Free Cross-linked PE Insulated Wire

For use in ranges, water heaters, clothes dryers, rotisseries,cookers, toasters.

Leads for transformers, lighting, ballasts and motors.

Internal wiring of electric heating, gas heating, cooking equipment and hairdressing equipment.


Features

- Temperature Rating:105 °C
- Voltage Rating:300 V
- Standard: UL758, UL1581 & CSA C22.2 NO.210.2,IEC60754-2,RoHS
- Tinned or bare, stranded or solid copper conductor, 32-10AWG.
- Cross-linked flame retardant PE insulated.
- Uniform insulation thickness to ensure easy stripping and cutting.
- Passes UL VW-1 & CSA FT 1 vertical flame test



Dimensions

AWG	Conductor No. / mm	Conductor Dia.(mm)	Insulation Thickness(mm)	Outer Dia. (mm)	Maximum Resistance at 20 °C (Ω/Km)	Standard Length (meter/ coil)
30	7/0.10	0.30	0.40±0.05	1.10±0.15	381	610
28	7/0.127	0.38	0.40±0.05	1.18±0.15	239	610
26	7/0.16	0.48	0.40±0.05	1.28±0.15	150	610
24	11/0.16	0.61	0.40±0.05	1.41±0.15	94.2	610
22	17/0.16	0.76	0.40±0.05	1.56±0.15	59.4	610
20	26/0.16	0.94	0.40±0.05	1.74±0.15	37.6	610
18	16/0.254	1.18	0.40±0.05	1.98±0.15	23.5	305
16	26/0.254	1.50	0.40±0.05	2.30±0.15	14.7	305

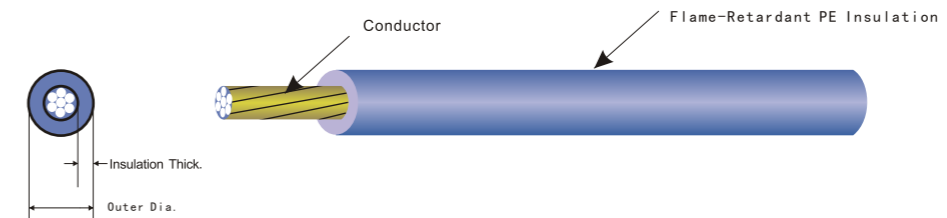

E227566 AWM STYLE 3385 XX AWG 105C 300V VW-1-- AWM IA/B 105C 300V FT1 -LF- WOER
E227566 AWM STYLE 3385 XX AWG 105C 300V VW-1-- AWM IA/B 105C 300V FT1 -LF- -HF- WOER

Colors:

Black, brown, red,orange, yellow, green, blue, violet , grey , white.

Similar products

E227566 AWM STYLE 3302 XX AWG 105C 30V VW-1-- AWM IA/B 105C 30V FT1 -LF- -HF - WOER
E227566 AWM STYLE 10368 XX AWG 105C 300V VW-1-- AWM IA/105C 300V FT1 -LF- -HF- WOER
E227566 AWM STYLE 3386 XX AWG 105C 600V VW-1-- AWM IA/B 105C 600V FT1 -LF- -HF- WOER
E227566 AWM STYLE 3569 XX AWG 105C 600V VW-1-- AWM IA/B 105C 600V FT1 -LF- -HF- WOER
E227566 AWM STYLE 3275 XX AWG 105C 1000V VW-1-- AWM IA/B 105C 1000V FT1 -LF- WOER