



The R5460x Series are high voltage CMOS-based protection ICs for over-charge/discharge of rechargeable two-cell Li-ion/Lithium polymer, further include a short circuit protection circuit for preventing large external short circuit current and the protection circuits against the excess discharge-current and excess charge current.

Each of these ICs is composed of six voltage detectors, reference units, a delay circuit, a short circuit protector, an oscillator, a counter, and a logic circuit. In addition to SOT-23-6 package, DFN(PLP)1820-6 is also available.

FEATURES

- Supply Voltage (V_{DD}) 12V (Absolute Maximum Rating)
- Charger Negative Input Voltage (V_-) -30V (Absolute Maximum Rating)
- Operating Input Voltage Range (V_{DD}) 1.5V to 10.0V
- Supply Current (I_{DD}) Typ.4.0 μ A
- Standby Current (I_s) Max.0.1 μ A (C, F Version)
Max.2.0 μ A (A, D, E Version)
- Over-charge (V_{DET1}) Detector Threshold Range 4.1V to 4.5V (0.005V Steps)
(A,C,E,F Version)
3.5V to 4.0V (0.005V Steps)
(D Version)
Voltage Accuracy ± 25 mV (25 $^{\circ}$ C)
 ± 30 mV (-5 to 55 $^{\circ}$ C)
Output Delay Time ($t_{V_{DET1}}$) 1.0s
- Over-discharge (V_{DET2}) Detector Threshold Range 2.0 to 3.0V (0.1V Steps)
Voltage Accuracy $\pm 2.5\%$
Output Delay Time ($t_{V_{DET2}}$) 128ms
- Excess discharge-current Voltage Accuracy ± 15 mV (V_{DET3})
Output Delay Time ($t_{V_{DET3}}$) 12ms
- Excess charge-current Voltage Accuracy ± 30 mV or ± 40 mV (V_{DET4})
Output Delay Time ($t_{V_{DET4}}$) 8ms
- Short Protection Detector Threshold (V_{short}) Typ.1.0V
Output Delay Time (t_{short}) Typ.300 μ s
- 0V-battery charge Available
- Packages DFN(PLP)1820-6, SOT-23-6

BLOCK DIAGRAMS

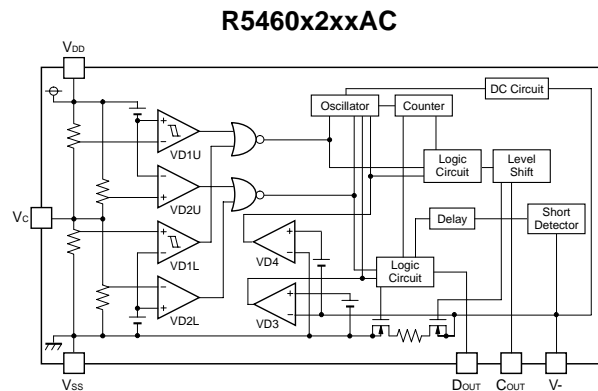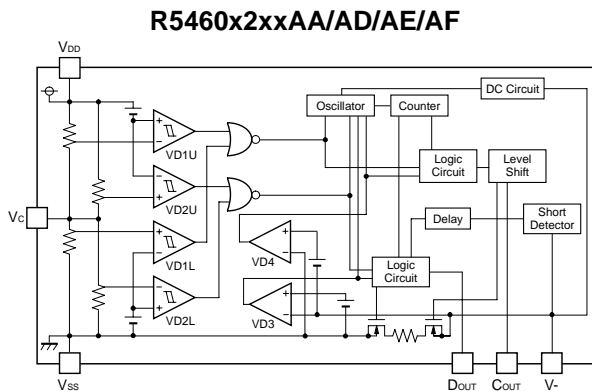

SELECTION GUIDES

Package	Quantity per Reel	Part No.
DFN(PLP)1820-6	5,000 pcs	R5460K2xx\$* -TR
SOT-23-6	3,000 pcs	R5460N2xx\$* -TR-FE

xx: Serial Number for the R5460x Series designating input four threshold for over-charge, over-discharge, excess discharge-current and excess charge-current detectors.

\$: Designation of Output delay option of excess charge-current, excess discharge-current and short circuit.

*: Designation of protection type.

- (A) Auto Release after Over-charge and Over-discharge.
- (C) Auto Release after Over-charge and with latch function after Over-discharge.
- (D) Auto Release after Over-charge and Over-discharge. Over-charge Detector Threshold Range is from 3.5V to 4.0V.
- (E) Auto Release after Over-charge and Over-discharge without Hysteresis Cancellation.
- (F) Auto Release after Over-charge and Over-discharge with Hysteresis.

PACKAGES

DFN(PLP)1820-6		SOT-23-6																									
<p>Top View</p> <p>Bottom View</p>	<table border="1"> <tr><td>1</td><td>COUT</td></tr> <tr><td>2</td><td>V-</td></tr> <tr><td>3</td><td>DOUT</td></tr> <tr><td>4</td><td>VSS</td></tr> <tr><td>5</td><td>VDD</td></tr> <tr><td>6</td><td>Vc</td></tr> </table>	1	COUT	2	V-	3	DOUT	4	VSS	5	VDD	6	Vc		<table border="1"> <tr><td>1</td><td>DOUT</td></tr> <tr><td>2</td><td>COUT</td></tr> <tr><td>3</td><td>V-</td></tr> <tr><td>4</td><td>Vc</td></tr> <tr><td>5</td><td>VDD</td></tr> <tr><td>6</td><td>VSS</td></tr> </table>	1	DOUT	2	COUT	3	V-	4	Vc	5	VDD	6	VSS
1	COUT																										
2	V-																										
3	DOUT																										
4	VSS																										
5	VDD																										
6	Vc																										
1	DOUT																										
2	COUT																										
3	V-																										
4	Vc																										
5	VDD																										
6	VSS																										

*) The tab is substrate level (V_{DD})

APPLICATIONS

- Li-ion/Li polymer protector of over-charge, over-discharge, excess discharge-current, excess charge-current for battery pack
- High precision protectors for cell-phones and any other gadgets using on board Li-ion/Li polymer battery