



Your Power Safeguard™
您的电路安全卫士



TECHNICAL PARAMETERS/ 技术参数:

CATALOG NO. 目录编号	CURRENT RATING 额定电流	SAFETY APPROVALS 安全认证					
		UR			cUR		
		L1	L2	L3	L1	L2	L3
12T-0500L	500mA			●			●
12T-0630L	630mA			●			●
12T-0750L	750mA			●			●
12T-0800L	800mA			●			●
12T-010L	1A			●			●
12T-013L	1.25A			●			●
12T-015L	1.5A			●			●
12T-016L	1.6A			●			●
12T-020L	2A			●			●
12T-025L	2.5A			●			●
12T-030L	3A			●			●
12T-032L	3.15A	●	●		●	●	
12T-035L	3.5A	●	●		●	●	
12T-040L	4A	●	●		●	●	
12T-050L	5A	●	●		●	●	
12T-063L	6.3A	●	●		●	●	
12T-070L	7A	●	●		●	●	

● DENOTES FOR APPROVED ● 表示已取得安全认证
L1 DENOTES FOR 24V (L1 代表 24V) L2 DENOTES FOR 32V (L2 代表 32V)
L3 DENOTES FOR 63V (L3 代表 63V)

ELECTRICAL CHARACTERISTICS/ 电气特性:


% of CURRENT RATING 额定电流的 %	BLOWING TIME 熔断时间	
100%	4 hours Min.	最快 4 小时
200%	1-120 seconds	1-120 秒
300%	0.05-3.00 seconds	0.05-3.00 秒
800%	0.0015-0.05 seconds	0.0015-0.05 秒

PACKING/ 包装:

5,000 PIECES TAPED AND REELED IN ONE BOX

每卷 5,000 只保险丝, 装入一个包装盒

BOX SIZE/ 包装盒尺寸:

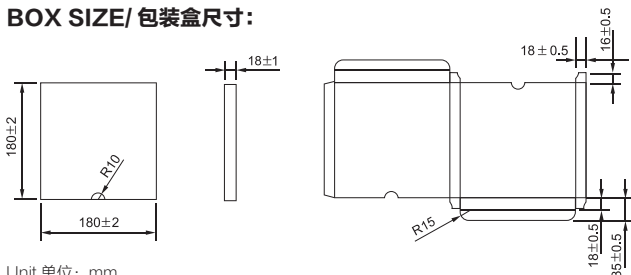

Unit 单位: mm



1206, RoHS Compliant & Pb-Free
SURFACE MOUNT CHIP FUSE (SLOW-BLOW)
表面贴装片式保险丝 (慢断型)


INTERRUPTING CAPACITY / 分断能力:

50A 63V AC (500mA-3A) 35A 24V AC (3.15A-7A)
50A 63V DC (500mA-3A) 50A 32V DC (3.15A-7A)


Dimensions/ 尺寸

Unit 单位: mm

TOP VIEW/ 上面:

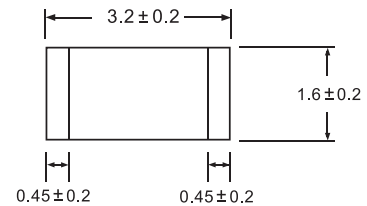

SIDE VIEW/ 侧面:



Standards/ 标准: UL 248-1, UL 248-14

Operating Temperature/ 工作温度: -55°C ~90°C

Storing Temperature/ 储存温度: -55°C ~85°C

Resistance to soldering heat/ 耐焊接热性: 260°C, 10s Max.

Solderability/ 可焊性: 235°C ± 5°C, 3.5s+0.5/-0s

12T AVERAGE I-T CHARACTERISTICS CURVE
(FOR REFERENCE ONLY)

12T 平均 I-T 曲线图 (仅供参考)

