






## 2.0mm Wafer SMT Straight & SMT R/A Type

### Specifications

Current Rating: 2A AC,DC  
 Voltage Rating: 100V AC,DC  
 Temperature Range: -25°C to +85°C  
 Contact Resistance: 10mΩ Max  
 Insulation Resistance: 1000MΩ Min  
 Withstanding Voltage: 800V AC/minute  
 Terminal: Brass / Gold Plated  
 Solder Tabs: Brass / Gold Plated  
 Material: Nylon 6T, UL94V-0




Part No.	Dimensions	
	A	B
2001MS-02GW-U	2.00	8.00
2001MS-03GW-U	4.00	10.00
2001MS-04GW-U	6.00	12.00
2001MS-05GW-U	8.00	14.00
2001MS-06GW-U	10.00	16.00
2001MS-07GW-U	12.00	18.00
2001MS-08GW-U	14.00	20.00
2001MS-09GW-U	16.00	22.00
2001MS-10GW-U	18.00	24.00
2001MS-11GW-U	20.00	26.00
2001MS-12GW-U	22.00	28.00
2001MS-13GW-U	24.00	30.00
2001MS-14GW-U	26.00	32.00
2001MS-15GW-U	28.00	34.00
2001MS-16GW-U	30.00	36.00

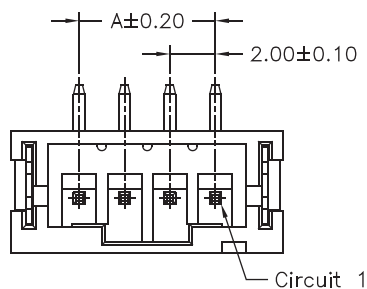





**Part No.:2001MS-XXGW-U**

### Specifications

Current Rating: 2A AC,DC  
 Voltage Rating: 100V AC,DC  
 Temperature Range: -25°C to +85°C  
 Contact Resistance: 10mΩ Max  
 Insulation Resistance: 1000MΩ Min  
 Withstanding Voltage: 800V AC/minute  
 Terminal: Brass / Gold Plated  
 Solder Tabs: Brass / Gold Plated  
 Material: Nylon 6T, UL94V-0



Part No.	Dimensions	
	A	B
2001MR-02GW-U	2.00	8.00
2001MR-03GW-U	4.00	10.00
2001MR-04GW-U	6.00	12.00
2001MR-05GW-U	8.00	14.00
2001MR-06GW-U	10.00	16.00
2001MR-07GW-U	12.00	18.00
2001MR-08GW-U	14.00	20.00
2001MR-09GW-U	16.00	22.00
2001MR-10GW-U	18.00	24.00
2001MR-11GW-U	20.00	26.00
2001MR-12GW-U	22.00	28.00
2001MR-13GW-U	24.00	30.00
2001MR-14GW-U	26.00	32.00
2001MR-15GW-U	28.00	34.00
2001MR-16GW-U	30.00	36.00

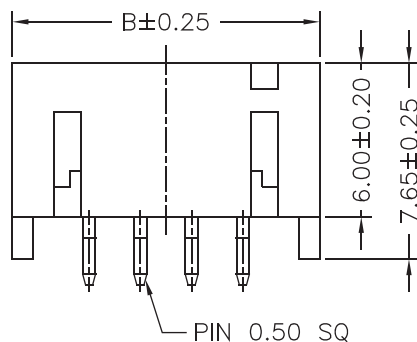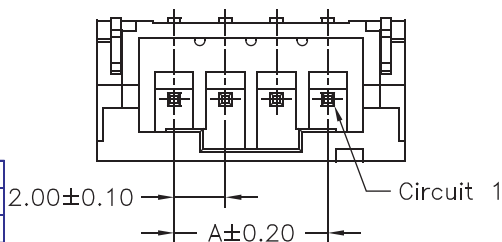

**Part No.:2001MR-XXGW-U**