




Your Power Safeguard™
您的电路安全卫士

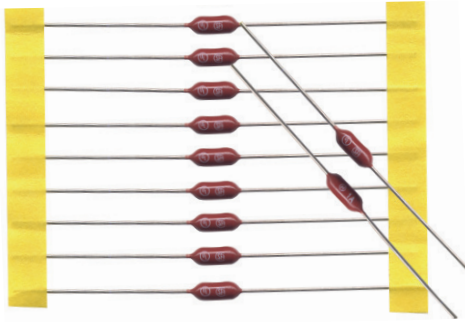

Φ2.4x7mm, RoHS Compliant & Pb-Free
MICROFUSE (MEDIUM SLOW-BLOW)
微型保险丝管 (中等慢断型)

INTERRUPTING CAPACITY / 分断能力:
50 amperes at 125V/250V AC (200mA-10A)
100 amperes at 125V AC (1A-5A) PSE

TECHNICAL PARAMETERS/ 技术参数:

CATALOG NO. 目录编号	CURRENT RATING 额定电流	SAFETY APPROVALS 安全认证						REFERENCE (A ² .Sec.) (RoHS) I ² T 参考值
		CCC		CQC		UL(cUL)		
		H	H	H	L	H	L	
20S-0200H/L	200mA	•		•	•	•	•	0.01230
20S-0250H/L	250mA	•		•	•	•	•	0.02431
20S-0300H/L	300mA			•	•	•	•	0.03270
20S-0315H/L	315mA	•		•	•	•	•	0.03671
20S-0350H/L	350mA			•	•	•	•	0.04738
20S-0375H/L	375mA			•	•	•	•	0.06790
20S-0400H/L	400mA			•	•	•	•	0.08190
20S-0500H/L	500mA	•		•	•	•	•	0.1543
20S-0600H/L	600mA			•	•	•	•	0.1591
20S-0630H/L	630mA	•		•	•	•	•	0.2808
20S-0700H/L	700mA	•		•	•	•	•	0.3874
20S-0750H/L	750mA			•	•	•	•	0.4989
20S-0800H/L	800mA	•		•	•	•	•	0.6133
20S-010H/L	1A	•		•	•	•	•	0.9903
20S-012H/L	1.2A			•	•	•	•	1.435
20S-013H/L	1.25A	•		•	•	•	•	1.749
20S-015H/L	1.5A			•	•	•	•	2.002
20S-016H/L	1.6A	•		•	•	•	•	2.374
20S-020H/L	2A	•		•	•	•	•	4.334
20S-023H/L	2.25A			•	•	•	•	6.002
20S-025H/L	2.5A	•		•	•	•	•	7.569
20S-030H/L	3A			•	•	•	•	11.64
20S-032H/L	3.15A	•		•	•	•	•	12.20
20S-035H/L	3.5A			•	•	•	•	15.72
20S-040H/L	4A	•		•	•	•	•	20.88
20S-050H/L	5A			•	•	•	•	42.76
20S-060H/L	6A			•	•	•	•	58.61
20S-063H/L	6.3A	•		•	•	•	•	67.99
20S-070H/L	7A			•	•	•	•	92.44
20S-080H/L	8A			•	•	•	•	74.48
20S-090H/L	9A			•	•	•	•	93.07
20S-100H/L	10A			•	•	•	•	153.6


• DENOTES FOR APPROVED • 表示已取得安全认证
H DENOTES FOR 250V (H 代表 250V), L DENOTES FOR 125V (L 代表 125V)

ELECTRICAL CHARACTERISTICS/ 电气特性:

% of CURRENT RATING 额定电流的 %	BLOWING TIME 熔断时间	
100%	4 hours Min.	最快 4 小时
200%	60 seconds Max.	最慢 60 秒

PACKING/ 包装:


1. INNER BOX/ 内盒: AMMO PACK

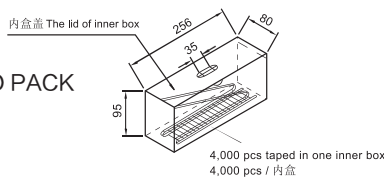

Unit 单位: mm

2. OUTER CARTON/ 外箱: 10 INNER BOXES / CARTON
CARTON SIZE / 尺寸: L440x W270 x H230(mm)

Dimensions/ 尺寸:

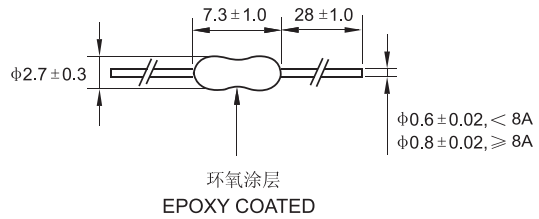

Standards/ 标准: UL 248-1, UL 248-14
Operating Temperature/ 工作温度: -55°C ~ 125°C
Storing Temperature/ 储存温度: -55°C ~ 85°C
Resistance to soldering heat/ 耐焊接热性: 260°C, 10s Max.
Solderability/ 可焊性: 245°C ± 5°C, 5s ± 0.5s

**20S AVERAGE I-T CHARACTERISTICS CURVE
(FOR REFERENCE ONLY)
20S 平均 I-T 曲线图 (仅供参考)**

