



Specifications:
 Current rating:1.0A AC,DC
 Voltage rating:250V AC,DC
 Contact resistance:15m ohm max
 Insulator resistance:5000M ohm min
 Dielectric withstanding voltage:1000V AC/minute
 Operating temperature:-40°C to +105°C
 Material:

Insulator:High Temp. Plastic (PBT UL 94V-0)
 Standard Color:Black
 Contacts:Copper Alloy
 Finish:Tin Plated
 How To Order
 2227-XX-XX


03: Space:7.62mm
 04: Space:10.16mm
 06: Space:15.24mm
 NO. Of Position

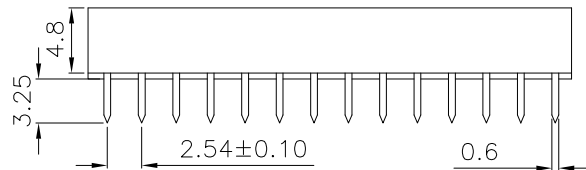

Note1: W/O middle bar(6~20P)
 With middle bar(22~48P)

Dimension:

Circuits	DIM.A	DIM.B	DIM.C	DIM.D	Spacing	Circuits	DIM.A	DIM.B	DIM.C	DIM.D	Spacing
6	7.62	5.08	10.16	7.62	03	22	27.94	25.40	12.70	10.16	04
8	10.16	7.62	10.16	7.62		24	30.48	27.94	17.78	15.24	
14	17.78	15.24	10.16	7.62		28	35.56	33.02	17.78	15.24	
16	20.32	17.78	10.16	7.62		32	40.64	38.10	17.78	15.24	
18	22.86	20.32	10.16	7.62		40	50.80	48.26	17.78	15.24	
20	25.40	22.86	10.16	7.62		42	53.34	50.80	17.78	15.24	
24	30.48	27.94	10.16	7.62		48	60.96	58.42	17.78	15.24	
28	35.56	33.02	10.16	7.62							

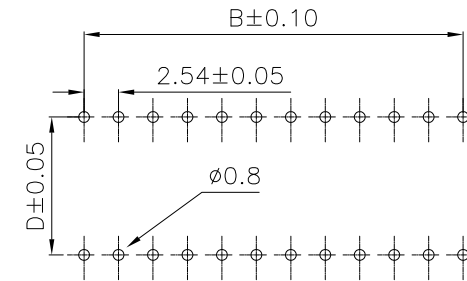

PCB LAYOUT

RoHS Compliant

E				DRAWN: OZR	GENERAL TOLERANCE: .X=±0.2 .XX=±0.15	Neltron Industrial Co., Ltd.	DESCRIPTION: 2.54mm IC Socket Stamp Pin	SIZE A4
D	Jan-25-2006	ENC-CN060113	OZR	CHECKED: Jeremy Liu				
C	Jul-19-2005	ENC-CN050722	OZR	APPROVAL: Mike Wu	UNIT: MM	PART NO: 2227-XX-XX		
B	JuN-15-2004		Maryann		SCALE:			
A	01-26-1999	(PC0001)	Jack		SHEET: 1 / 1			
REV	DATE	FILE	BY		PROJECTION:			