


**Specifications:**

Current Rating: 9.0 AC/DC  
 Voltage Rating: 600V AC/DC  
 Contact Resistance: 10m ohm. max.  
 Withstanding Voltage: 1,500V AC/minute  
 Operating Temperature Range: -40°C ~ +105°C  
 Application Wires: AWG16 to 28  
 Mates With 2257 Series Housing  
 Material and Finish  
 Contact: Brass or Phosphor Bronze  
 Finish: Tin Plated  
 Packing: See Table

**How To Order**

2257TX-XXXX-XX

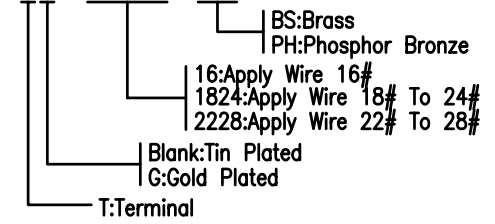

Part No	Wire Apply	A	B	C	D	Q'ty/Reel
2257T-16	16AWG	3.6	4.5	2.3	2.7	4,000Pcs
2257T-1824	18-24AWG	3.6	4.5	1.9	2.3	4,000Pcs
2257T-2228	22-28AWG	2.3	2.3	1.8	1.65	5,000Pcs

RoHS Compliant

REV.	DATE	FILE	BY
F			
E			
D			
C	01-DEC-2010	Amend Stru.	Art
B	24-NOV-2009	Amend dim.	Art
A	09-DEC-2008	(PC0001)	Art

**DRAWN:**  
Art

**CHECKED:**

**APPROVAL:**  
Mike Wu

**GENERAL TOLERANCE:**  
.X =  $\pm 0.2$   
.XX =  $\pm 0.15$

**UNIT:** MM

**SCALE:** 1:1

**SHEET:** 1/1

**PROJECTION:**

**繼德工業股份有限公司**  
**Neltron Industrial Co., Ltd.**

**DESCRIPTION:** 4.2mm Plug Crimp Terminal

**PART NO:** 2257TX-XXXX-XX

**SIZE:** **A4**