

Specifications:

Current Rating:9.0 Amps
 Voltage Rating:600V AC,DC
 Contact Resistance:10m ohm max
 Insulation Resistance:1000M ohm min
 Withstanding Voltage:1500V AC/minute
 Temperature Range:-40°C To +105°C
 Materials:


Insulator:Nylon66 (UL94V-2)
 Insulator Color: Transparent White
 Contact:Copper Alloy
 Plating:Tin Plated

How To Order
 2266S-XX-PG

With Peg
 No Of Positions
 S: Straight Double Rows

Dimension:

Circuits	Dim A	Dim B	Dim C	Circuits	Dim A	Dim B	Dim C
2	5.4	—	9.4	14	30.6	25.2	34.6
4	9.6	4.2	13.6	16	34.8	29.4	38.8
6	13.8	8.4	17.8	18	39.0	33.6	43.0
8	18.0	12.6	22.0	20	43.2	37.8	47.2
10	22.2	16.8	26.2	22	47.4	42.0	51.4
12	26.4	21.0	30.4	24	51.6	46.2	55.6

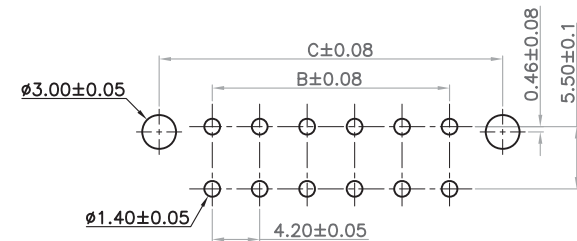

P.C.B Layout

RoHS Compliant

				DRAWN: CEL KING	GENERAL TOLERANCE: .X=±0.20 .XX=±0.15	繼德工業股份有限公司 Neltron Industrial Co., Ltd.	
				CHECKED: Jeremy Liu	UNIT: MM		DESCRIPTION: 4.2mm Wafer Straight Type Connector
G				APPROVAL: Mike Wu	SCALE: 1:1	PART NO: 2266S-XX-PG	A4
F	18-JAN-2008	ECN-CN080121	Zhou Lin		SHEET: 1 / 2		
E	05-Oct-2007	(PC0040)	Zhou Lin		PROJECTION:		
REV	DATE	FILE	BY				













1

2

3


4

5

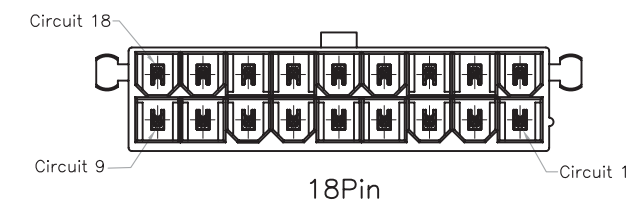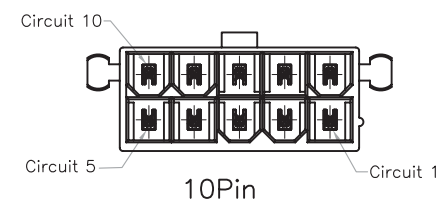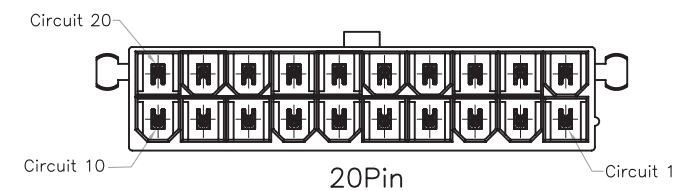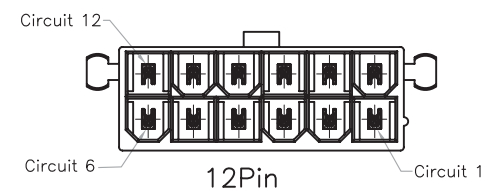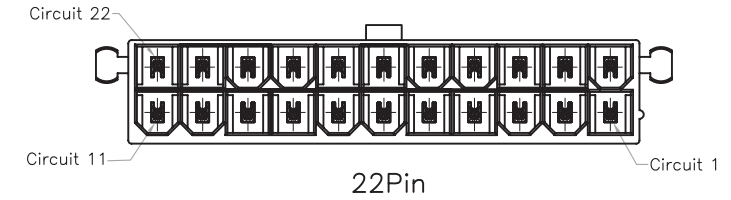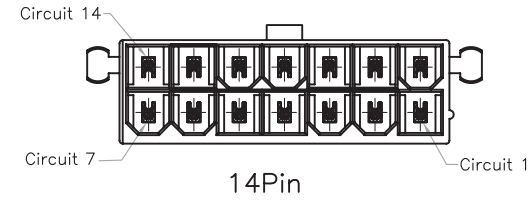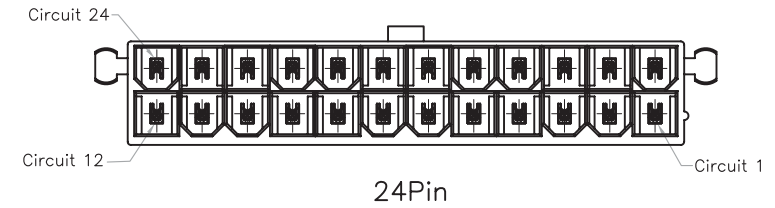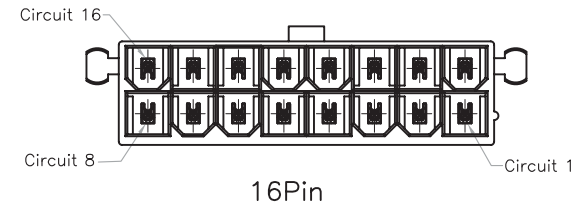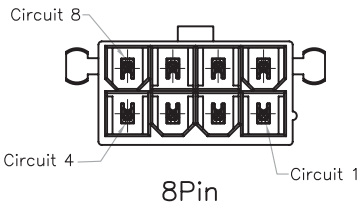

2~24P Protection Key Drawing(Ref.)

RoHS Compliant

				DRAWN: CEL KING	GENERAL TOLERANCE: .X=±0.20 .XX=±0.15	 繼德工業股份有限公司 Neltron Industrial Co., Ltd.	
G				CHECKED: Jeremy Liu	UNIT: MM		DESCRIPTION: 4.2mm Power Wafer Protection key Drawing
F	18-JAN-2008	ECN-CN080121	Zhou Lin	APPROVAL: Mike Wu	SCALE: 1:1	PART NO: 2266S-XX-PG	A4
E	05-Oct-2007	(PC0040)	Zhou Lin		SHEET: 2 / 2		
REV	DATE	FILE	BY		PROJECTION: 