

Specifications:

Current Rating:9.0A AC/DC
 Voltage Rating:600V AC/DC
 Contact Resistance:10m ohm. Max.
 Insulation Resistance:1000M ohm. Min.
 Withstanding Voltage:1500V AC For One Minute
 Operating Temperature Range:-40°C To +105°C
 Materials:


Insulator:Nylon 66 (UL94V-2)
 Insulator Color:Transparent
 Contact:Brass
 Plating:Tin Plated

How To Order:
 2266S-XX

— No. of Contacts
 — S:Staight Type Double Row

Dimension Iformation:

Circuits	Dim A	Dim B	Circuits	Dim A	Dim B
2	5.4	—	14	30.6	25.2
4	9.6	4.2	16	34.8	29.4
6	13.8	8.4	18	39.0	33.6
8	18.0	12.6	20	43.2	37.8
10	22.2	16.8	22	47.4	42.0
12	26.4	21.0	24	51.6	46.2

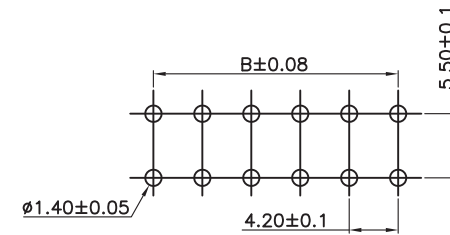

RECOMMENDED P.C.B LAYOUT

RoHS Compliant

F				DRAWN:
E				Andrew
D				CHECKED:
C				Jeremy Liu
B	16-Nov-2016	ECN-TW1611001	Jamie Wang	APPROVAL:
A	06-Apr-2007	(PC0001)	Andrew	Mike Wu
REV	DATE	FILE	BY	

GENERAL TOLERANCE:
.X=±0.20 .XX=±0.15
UNIT: MM
SCALE: 1:1
SHEET: 1 / 2
PROJECTION:

繼德工業股份有限公司 Netron Industrial Co., Ltd.	
DESCRIPTION:	SIZE
4.2mm Power Wafer Double Rows Straight Type	A4
PART NO:	
2266S-XX	













1

2



3

4

5

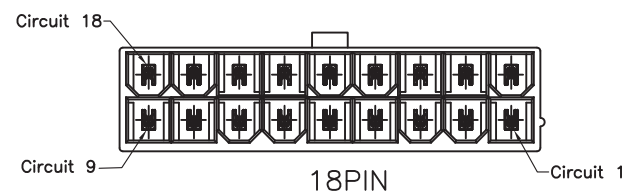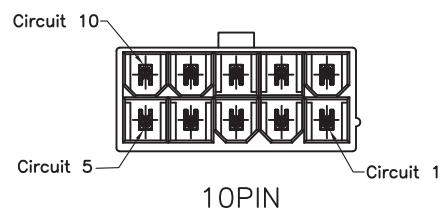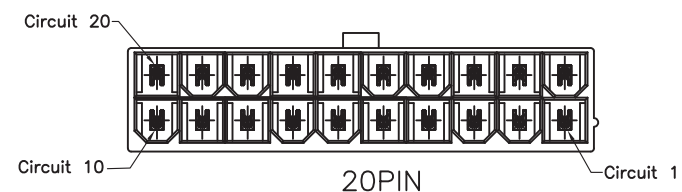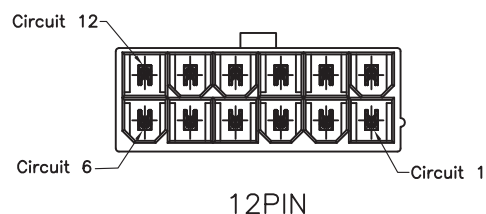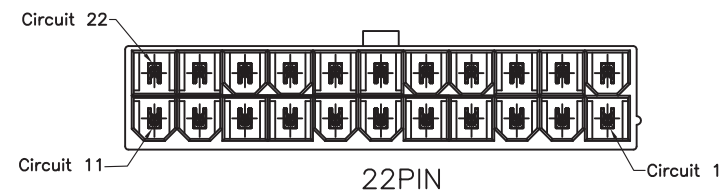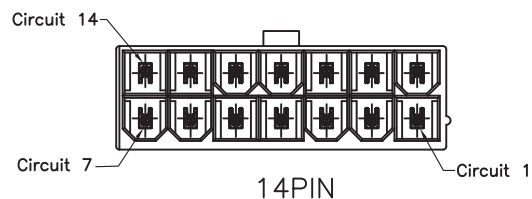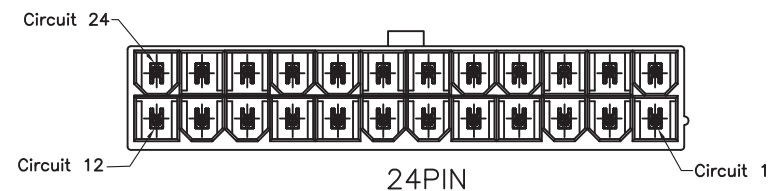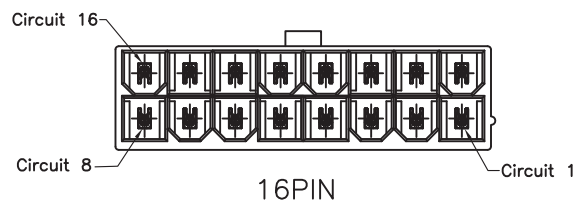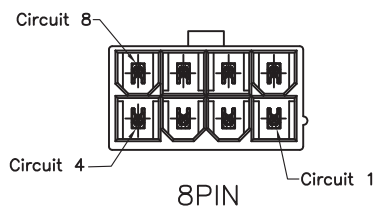

2~24P Protection Key Drawing(Ref.)

F				DRAWN: Andrew	GENERAL TOLERANCE: .X=±0.20 .XX=±0.15	 繼德工業股份有限公司 Neltron Industrial Co., Ltd.	DESCRIPTION: 4.2mm Power Wafer Double Rows Straight Type	SIZE A4
E			CHECKED: Jeremy Liu					
D				APPROVAL: Mike Wu	SCALE:1:1	PART NO: 2266S-XX		
C					SHEET: 2 / 2			
B	16-Nov-2016	ECN-TW1611001	Jamie Wang		PROJECTION: 			
A	06-Apr-2007	(PC0001)	Andrew					
REV	DATE	FILE	BY					