




Your Power Safeguard™
您的电路安全卫士

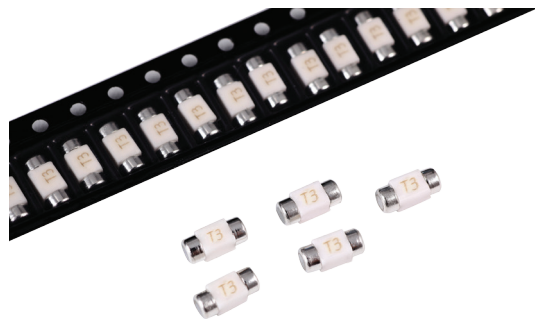

2410, RoHS Compliant & Pb-Free SMD NANO FUSE (SLOW-BLOW) 方型超微表面贴片式保险丝 (慢断型)

INTERRUPTING CAPACITY / 分断能力:

50A at 250V AC (200mA-5A)
100A at 125V DC/AC (200mA-5A)

TECHNICAL PARAMETERS/ 技术参数:

CATALOG NO. 目录编号	CURRENT RATING 额定电流	SAFETY APPROVALS 安全认证
		UR/cUR
25T-0200H/L	200mA	●
25T-0250H/L	250mA	●
25T-0315H/L	315mA	●
25T-0375H/L	375mA	●
25T-0400H/L	400mA	●
25T-0500H/L	500mA	●
25T-0630H/L	630mA	●
25T-0750H/L	750mA	●
25T-0800H/L	800mA	●
25T-010H/L	1A	●
25T-012H/L	1.2A	●
25T-013H/L	1.25A	●
25T-015H/L	1.5A	●
25T-016H/L	1.6A	●
25T-020H/L	2A	●
25T-025H/L	2.5A	●
25T-030H/L	3A	●
25T-035H/L	3.5A	●
25T-040H/L	4A	●
25T-050H/L	5A	●


● DENOTES FOR APPROVED ● 表示已取得安全认证
H DENOTES FOR 250V L DENOTES FOR 125V

ELECTRICAL CHARACTERISTICS/ 电气特性:


% of CURRENT RATING 额定电流的 %	BLOWING TIME 熔断时间	
100%	4 hours Min.	最快 4 小时
200%	1-60 seconds	1-60 秒
300%	0.2-3 seconds	0.2-3 秒
800%	0.01-0.1 seconds	0.01-0.1 秒

Standards/ 标准: UL 248-1, UL 248-14
Operating Temperature/ 工作温度: -55°C ~125°C
Storing Temperature/ 储存温度: -55°C ~85°C
Resistance to soldering heat/ 耐焊接热性: 260°C ± 5°C, 30s ± 5s
Solderability/ 可焊性: MIL-STD-202, Method 208

Dimensions/ 尺寸



Land Pattern:




Unit 单位: mm

PACKING/ 包装:

1,000 PIECES TAPED AND REELED IN ONE BOX
每卷 1,000 只保险丝, 装入一个包装盒

BOX SIZE/ 包装盒尺寸:

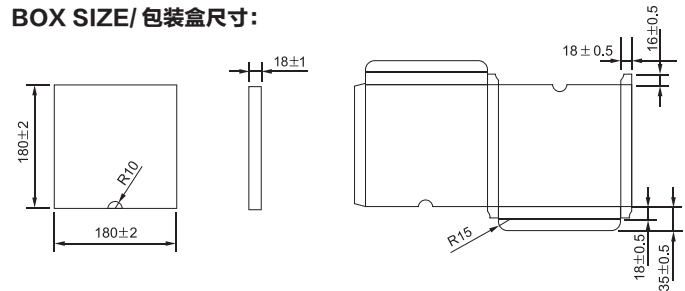

Unit 单位: mm

25T AVERAGE I-T CHARACTERISTICS CURVE (FOR REFERENCE ONLY)

25T 平均 I-T 曲线图 (仅供参考)

