



2410, RoHS Compliant & Pb-Free SMD NANO FUSE (FAST-BLOW) 方型超微表面贴片式保险丝 (速断型)


INTERRUPTING CAPACITY / 分断能力:

50A at 250V AC (100mA-10A), 50A at 125V AC/DC (12A-15A)
100A at 125V AC/DC (100mA-10A), 100A at 65V DC (12A-15A)

Dimensions/ 尺寸



Land Pattern:



Unit 单位: mm

TECHNICAL PARAMETERS/ 技术参数:

| CATALOG NO. 目录编号 | CURRENT RATING 额定电流 | SAFETY APPROVALS 安全认证 | | |
|---------------------|------------------------|--------------------------|----|----|
| | | UR/cUR | | |
| | | H | L1 | L2 |
| 25F-0100H/L1 | 100mA | ● | ● | |
| 25F-0125H/L1 | 125mA | ● | ● | |
| 25F-0160H/L1 | 160mA | ● | ● | |
| 25F-0200H/L1 | 200mA | ● | ● | |
| 25F-0250H/L1 | 250mA | ● | ● | |
| 25F-0315H/L1 | 315mA | ● | ● | |
| 25F-0375H/L1 | 375mA | ● | ● | |
| 25F-0400H/L1 | 400mA | ● | ● | |
| 25F-0500H/L1 | 500mA | ● | ● | |
| 25F-0630H/L1 | 630mA | ● | ● | |
| 25F-0750H/L1 | 750mA | ● | ● | |
| 25F-0800H/L1 | 800mA | ● | ● | |
| 25F-010H/L1 | 1A | ● | ● | |
| 25F-012H/L1 | 1.2A | ● | ● | |
| 25F-013H/L1 | 1.25A | ● | ● | |
| 25F-015H/L1 | 1.5A | ● | ● | |
| 25F-016H/L1 | 1.6A | ● | ● | |
| 25F-020H/L1 | 2A | ● | ● | |
| 25F-025H/L1 | 2.5A | ● | ● | |
| 25F-030H/L1 | 3A | ● | ● | |
| 25F-032H/L1 | 3.15A | ● | ● | |
| 25F-035H/L1 | 3.5A | ● | ● | |
| 25F-040H/L1 | 4A | ● | ● | |
| 25F-050H/L1 | 5A | ● | ● | |
| 25F-063H/L1 | 6.3A | ● | ● | |
| 25F-070H/L1 | 7A | ● | ● | |
| 25F-080H/L1 | 8A | ● | ● | |
| 25F-100H/L1 | 10A | ● | ● | |
| 25F-120L1/L2 | 12A | | ● | ● |
| 25F-150L1/L2 | 15A | | ● | ● |

● DENOTES FOR APPROVED ● 表示已取得安全认证

H DENOTES FOR 250V L1 DENOTES FOR 125V L2 DENOTES FOR 65V

ELECTRICAL CHARACTERISTICS/ 电气特性:

| % of CURRENT RATING 额定电流的 % | BLOWING TIME 熔断时间 |
|--------------------------------|---------------------------------|
| 100% | 4 hours Min. 最快4小时 (100mA-15A) |
| 200% | 5 seconds Max. 最慢5秒 (100mA-10A) |
| | 20 seconds Max. 最慢20秒 (12A-15A) |

Standards/ 标准: UL 248-1, UL 248-14

Operating Temperature/ 工作温度: -55°C ~125°C

Storing Temperature/ 储存温度: -55°C ~85°C


Resistance to soldering heat/ 耐焊接热性: 260°C ±5°C, 30s ±5s

Solderability/ 可焊性: MIL-STD-202, Method 208

PACKING/ 包装:

1,000 PIECES TAPED AND REELED IN ONE BOX
每卷 1,000 只保险丝, 装入一个包装盒

BOX SIZE/ 包装盒尺寸:

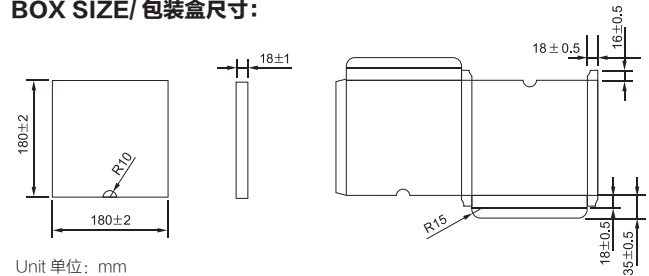

Unit 单位: mm

25F AVERAGE I-T CHARACTERISTICS CURVE (FOR REFERENCE ONLY)

25F 平均 I-T 曲线图 (仅供参考)

