




Your Power Safeguard™
您的电路安全卫士

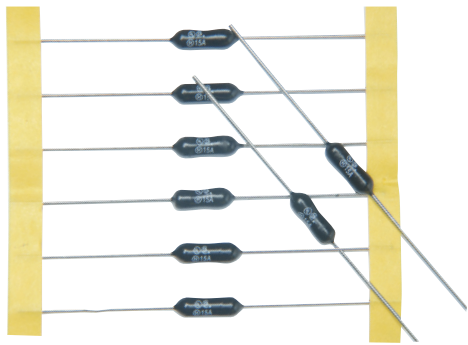

Φ3.6x10mm, RoHS Compliant
FAST-BLOW MICROFUSE
速断型保险丝管

INTERRUPTING CAPACITY / 分断能力:
50 amperes at 125V/250V/350V AC (100mA-15A)
100 amperes at 125V/250V AC (1A-5A) PSE

TECHNICAL PARAMETERS/ 技术参数:

CATALOG NO. 目录编号	CURRENT RATING 额定电流	SAFETY APPROVALS 安全认证									REFERENCE (A ² .Sec.) (RoHS) I ² T 参考值
		UL(cUL)			CSA			PSE			
		H ₁	H ₂	L	H ₁	H ₂	L	H ₂	L		
30N-0200H1/H2/L	200mA										0.02502
30N-0250H1/H2/L	250mA										0.03852
30N-0300H1/H2/L	300mA										0.06389
30N-0315H1/H2/L	315mA										0.08730
30N-0350H1/H2/L	350mA										0.1118
30N-0375H1/H2/L	375mA										0.1426
30N-0400H1/H2/L	400mA										0.1488
30N-0500H1/H2/L	500mA										0.2581
30N-0600H1/H2/L	600mA										0.1189
30N-0630H1/H2/L	630mA										0.1279
30N-0700H1/H2/L	700mA										0.1680
30N-0750H1/H2/L	750mA										0.1978
30N-0800H1/H2/L	800mA										0.2285
30N-010H1/H2/L	1A										0.4373
30N-012H1/H2/L	1.2A										0.6019
30N-013H1/H2/L	1.25A										0.6261
30N-015H1/H2/L	1.5A										0.9885
30N-016H1/H2/L	1.6A										1.159
30N-020H1/H2/L	2A										2.297
30N-023H1/H2/L	2.25A										2.919
30N-025H1/H2/L	2.5A										2.152
30N-030H1/H2/L	3A										3.005
30N-032H1/H2/L	3.15A										4.174
30N-035H1/H2/L	3.5A										5.182
30N-040H1/H2/L	4A										5.712
30N-050H1/H2/L	5A										10.55
30N-060H1/H2/L	6A										15.84
30N-063H1/H2/L	6.3A										18.58
30N-070H1/H2/L	7A										23.32
30N-080H1/H2/L	8A										38.20
30N-090H1/H2/L	9A										54.34
30N-100H1/H2/L	10A										75.76
30N-120H1/H2/L	12A										110.4
30N-150H1/H2/L	15A										250.9

● DENOTES FOR APPROVED ● 表示已取得安全认证
H1 DENOTES FOR 350V (H1 代表 350V) H2 DENOTES FOR 250V (H2 代表 250V)
L DENOTES FOR 125V (L 代表 125V)


ELECTRICAL CHARACTERISTICS/ 电气特性:

% of CURRENT RATING 额定电流的 %	BLOWING TIME 熔断时间	
100%	4 hours Min.	最快 4 小时
200%	60 seconds Max.	最慢 60 秒

Standards/ 标准: UL 248-1, UL 248-14
Operating Temperature/ 工作温度: -55°C ~125°C
Storing Temperature/ 储存温度: -55°C ~85°C
Resistance to soldering heat/ 耐焊接热性: 260°C, 10s Max.
Solderability/ 可焊性: 245°C ± 5°C, 5s ± 0.5s


Dimensions/ 尺寸:

Unit 单位: mm

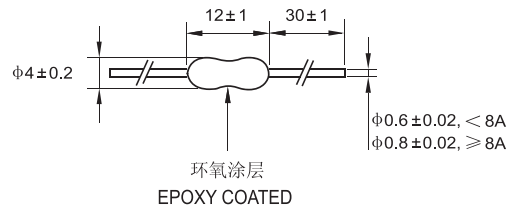

PACKING/ 包装:

1. INNER BOX/ 内盒: AMMO PACK

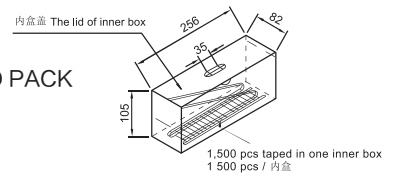

2. OUTER CARTON/ 外箱: 10 INNER BOXES / CARTON
CARTON SIZE / 尺寸: L440x W270 x H230(mm)

30N AVERAGE I-T CHARACTERISTICS CURVE
(FOR REFERENCE ONLY)

30N 平均 I-T 曲线图 (仅供参考)

