



特性 FEATURES :

- * 5 x 20mm ガラス管・電安B種溶断タイプ
Glass Tube, PSE Class B Normal Blow Type
- 51NR / 52NR : 速断タイプ (普通溶断) Fast-Acting (Normal Blow)
- 51ST / 52ST : 耐ラッシュタイプ Medium Time-Lag Type
- * RoHS 適合品 RoHS-Compliant Products

規格承認 APPROVALS :


- * METI (PSE) 承認 [1A-15A 125V/250V]
- * KC (Korea Certification) 韓国安全認証 [51NR / 52NR: 100mA-10A 250V]




51NR/52NR, 51ST/52ST SERIES

寸法 DIMENSIONS :

51NR
51ST



52NR
52ST

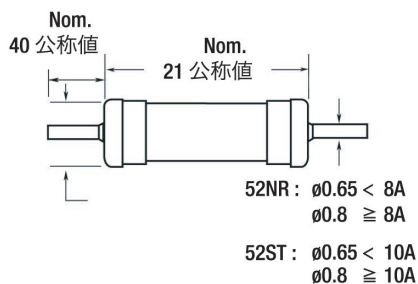


単位 Unit : mm

電気的特性 ELECTRICAL CHARACTERISTICS :


電流値 % of Ampere Rating	溶断時間 Opening Time
130%	1 時間最小 hours Min.
160%	1 時間最大 hour Max.
200%	2 分最大 sec Max.

溶断曲線 AVERAGE TIME CURRENT CURVES :

51NR / 52NR TYPICAL

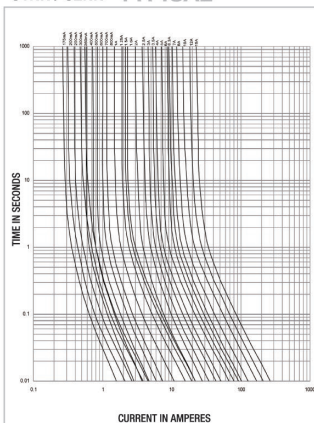

51ST / 52ST TYPICAL

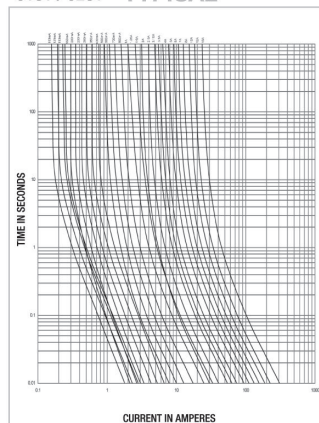

仕様 SPECIFICATIONS :

品名 Product Code 51NR / 52NR	品名 Product Code 51ST / 52ST	電流値 Ampere Rating	電圧値 (VAC) Voltage Rating H / L	品名 Product Code 51NR / 52NR	品名 Product Code 51ST / 52ST	電流値 Ampere Rating	電圧値 (VAC) Voltage Rating H / L
	51ST / 52ST 0125H/L	125 mA	250V / 125V	51NR / 52NR 013H/L	51ST / 52ST 013H/L	1.25 A	250V / 125V
	51ST / 52ST 0160H/L	160 mA	250V / 125V	51NR / 52NR 015H/L	51ST / 52ST 015H/L	1.5 A	250V / 125V
51NR / 52NR 0175H/L	51ST / 52ST 0175H/L	175 mA	250V / 125V	51NR / 52NR 016H/L	51ST / 52ST 016H/L	1.6 A	250V / 125V
51NR / 52NR 0200H/L	51ST / 52ST 0200H/L	200 mA	250V / 125V	51NR / 52NR 020H/L	51ST / 52ST 020H/L	2 A	250V / 125V
51NR / 52NR 0250H/L	51ST / 52ST 0250H/L	250 mA	250V / 125V	51NR / 52NR 025H/L	51ST / 52ST 025H/L	2.5 A	250V / 125V
51NR / 52NR 0300H/L	51ST / 52ST 0300H/L	300 mA	250V / 125V	51NR / 52NR 030H/L	51ST / 52ST 030H/L	3 A	250V / 125V
51NR / 52NR 0315H/L	51ST / 52ST 0315H/L	315 mA	250V / 125V	51NR / 52NR 032H/L	51ST / 52ST 032H/L	3.15 A	250V / 125V
51NR / 52NR 0350H/L	51ST / 52ST 0350H/L	350 mA	250V / 125V	51NR / 52NR 035H/L	51ST / 52ST 035H/L	3.5 A	250V / 125V
51NR / 52NR 0375H/L	51ST / 52ST 0375H/L	375 mA	250V / 125V	51NR / 52NR 040H/L	51ST / 52ST 040H/L	4 A	250V / 125V
51NR / 52NR 0400H/L	51ST / 52ST 0400H/L	400 mA	250V / 125V	51NR / 52NR 050H/L	51ST / 52ST 050H/L	5 A	250V / 125V
51NR / 52NR 0500H/L	51ST / 52ST 0500H/L	500 mA	250V / 125V	51NR / 52NR 060H/L	51ST / 52ST 060H/L	6 A	250V / 125V
51NR / 52NR 0600H/L	51ST / 52ST 0600H/L	600 mA	250V / 125V	51NR / 52NR 063H/L	51ST / 52ST 063H/L	6.3 A	250V / 125V
51NR / 52NR 0630H/L	51ST / 52ST 0630H/L	630 mA	250V / 125V	51NR / 52NR 070H/L	51ST / 52ST 070H/L	7 A	250V / 125V
51NR / 52NR 0700H/L	51ST / 52ST 0700H/L	700 mA	250V / 125V	51NR / 52NR 080H/L	51ST / 52ST 080H/L	8 A	250V / 125V
51NR / 52NR 0750H/L	51ST / 52ST 0750H/L	750 mA	250V / 125V	51NR / 52NR 090H/L	51ST / 52ST 090H/L	9 A	250V / 125V
51NR / 52NR 0800H/L	51ST / 52ST 0800H/L	800 mA	250V / 125V	51NR / 52NR 100H/L	51ST / 52ST 100H/L	10 A	250V / 125V
51NR / 52NR 010H/L	51ST / 52ST 010H/L	1 A	250V / 125V	51NR / 52NR 120H/L	51ST / 52ST 120H/L	12 A	250V / 125V
51NR / 52NR 012H/L	51ST / 52ST 012H/L	1.2 A	250V / 125V	51NR / 52NR 150H/L	51ST / 52ST 150H/L	15 A	250V / 125V

* 定格電圧 Voltage Rating : H - 250VAC / L - 125VAC

* 遮断定格 Interrupting Rating :
 100A 125VAC (51NR/51ST : 1-15A)
 500A 125VAC (52NR/52ST : 1-15A)
 100A 250VAC (51NR/51ST : 1-15A)
 100A 250VAC (52NR/52ST : 1-15A)