
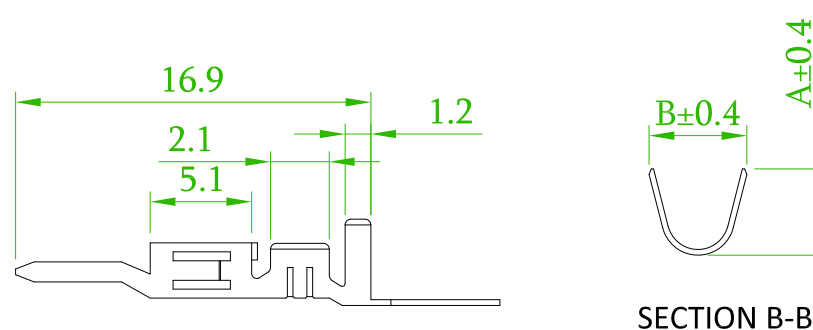
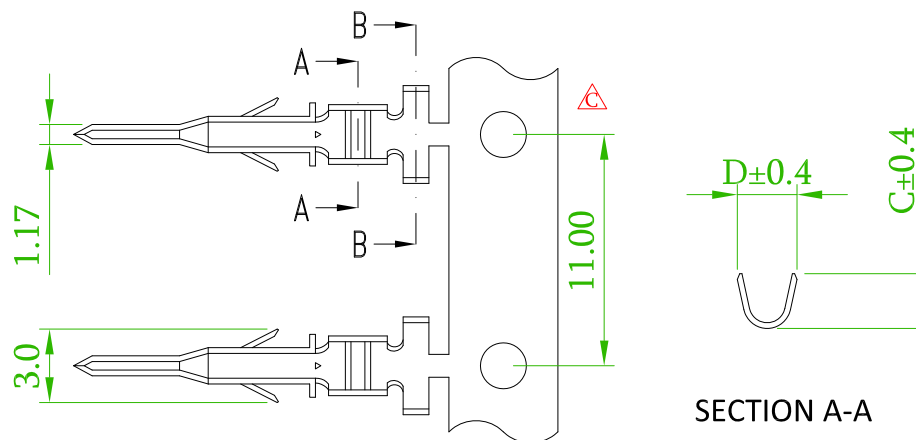


ORDER INFORMATION

SPECIFICATIONS

Current rating up to 9A (With #18 AWG)
 Dielectric Voltage: 1500V AC for minute
 Contact Resistance: 10mΩ Max
 Operation Temperature: -40°C to 105°C
 Thickness: 0.2 mm

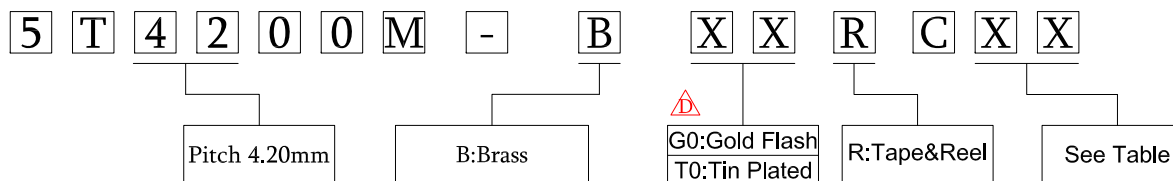

SECTION A-A

SECTION B-B

Old Part No.:4200-MT-L

Part No.	Dimensions				Wire Range
	A	B	C	D	
5T4200M-BTORC04	2.3	2.3	1.65	1.8	AWG#22-#28
5T4200M-BTORC01	4.5	3.6	2.3	1.9	AWG#18-#24
5T4200M-BTORC03			2.8	2.4	AWG#16



△x1	Add the plating: G0: Gold Flash.	Gary	2018/03/26
△x1	Add the dimension.	Gary	2018/02/07
△x2	1. Revised the Part No. :5T4200M-BTORC02 ->5T4200M-BTORC01 2. Revised the Part No. :5T4200M-BTORC01 ->5T4200M-BTORC04	Jeff	2017/03/02
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

 耀德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	4.2mm TERMINAL			頁數 Page	1/1
	品號 PART NO.	5T4200M-BXXRCXX			繪圖 DRAWN	Jeff 2016/10/19
	圖號 DRAWING NO.	GW083-JF201	版本 REV.	D	核對 CHECKED	Josh 2018/03/26
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Jason 2018/03/26
	公差 TOLERANCE	.X ±0.40 .XX ±0.25	單位 UNIT	mm	THIRD ANGLE PROJECTION	