

61ST, 62ST



Φ 6.35x32mm, RoHS Compliant & Pb-Free GLASS TUBE FUSE (MEDIUM SLOW-BLOW) 玻璃保险丝管 (中等慢断型)


INTERRUPTING CAPACITY / 分断能力:

100 amperes at 125V AC (1A-15A) PSE (61ST)
500 amperes at 125V AC (1A-15A) PSE (62ST)
100 amperes at 250V AC (1A-15A) PSE (61ST/62ST)

ELECTRICAL CHARACTERISTICS / 电气特性:


% of CURRENT RATING 额定电流的 %	BLOWING TIME 熔断时间	
130%	1 hour Min.	最快 1 小时
160%	1 hour Max.	最慢 1 小时
200%	120 seconds Max.	最慢 120 秒

Dimensions / 尺寸:

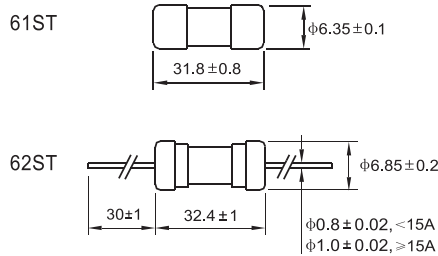

61ST/62ST AVERAGE I-T CHARACTERISTICS CURVE (FOR REFERENCE ONLY)

61ST/62ST 平均 I-T 曲线图 (仅供参考)

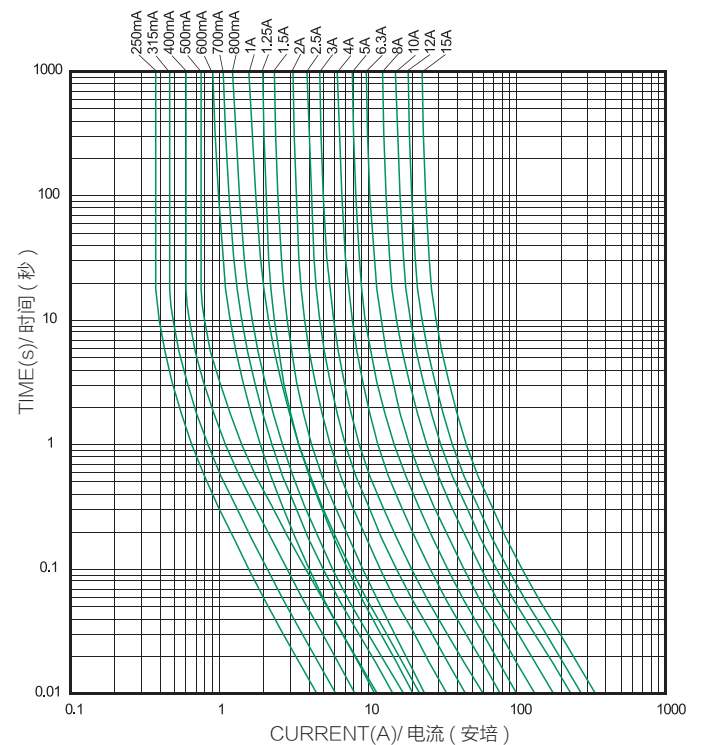

TECHNICAL PARAMETERS / 技术参数:

CATALOG NO. 目录编号	CURRENT RATING 额定电流	SAFETY APPROVALS 安全认证		REFERENCE (A ² Sec.) (RoHS) I ² T 参考值
		PSE		
		H	L	
61ST,62ST-0100H/L	100mA			
61ST,62ST-0125H/L	125mA			
61ST,62ST-0150H/L	150mA			
61ST,62ST-0160H/L	160mA			
61ST,62ST-0200H/L	200mA			
61ST,62ST-0250H/L	250mA			0.211
61ST,62ST-0300H/L	300mA			0.304
61ST,62ST-0315H/L	315mA			0.372
61ST,62ST-0350H/L	350mA			0.426
61ST,62ST-0375H/L	375mA			0.501
61ST,62ST-0400H/L	400mA			0.708
61ST,62ST-0500H/L	500mA			1.389
61ST,62ST-0600H/L	600mA			1.253
61ST,62ST-0630H/L	630mA			1.381
61ST,62ST-0700H/L	700mA			1.914
61ST,62ST-0750H/L	750mA			2.311
61ST,62ST-0800H/L	800mA			2.911
61ST,62ST-010H/L	1A	●	●	5.063
61ST,62ST-012H/L	1.2A	●	●	3.878
61ST,62ST-013H/L	1.25A	●	●	4.207
61ST,62ST-015H/L	1.5A	●	●	5.702
61ST,62ST-016H/L	1.6A	●	●	6.502
61ST,62ST-020H/L	2A	●	●	9.078
61ST,62ST-025H/L	2.5A	●	●	16.67
61ST,62ST-030H/L	3A	●	●	32.24
61ST,62ST-032H/L	3.15A	●	●	35.21
61ST,62ST-035H/L	3.5A	●	●	45.92
61ST,62ST-040H/L	4A	●	●	59.71
61ST,62ST-050H/L	5A	●	●	98.25
61ST,62ST-060H/L	6A	●	●	160.2
61ST,62ST-063H/L	6.3A	●	●	176.8
61ST,62ST-070H/L	7A	●	●	268.3
61ST,62ST-080H/L	8A	●	●	304.8
61ST,62ST-090H/L	9A	●	●	479.8
61ST,62ST-100H/L	10A	●	●	570.4
61ST,62ST-120H/L	12A	●	●	874.6
61ST,62ST-150H/L	15A	●	●	1407

● DENOTES FOR APPROVED ● 表示已取得安全认证
H DENOTES FOR 250V (H 代表 250V), L DENOTES FOR 125V (L 代表 125V)

Standards / 标准: JIS C6575

Operating Temperature / 工作温度: -55°C ~125°C

Storing Temperature / 储存温度: -55°C ~85°C

Resistance to soldering heat / 耐焊接热性: 260°C, 10s Max.

Solderability / 可焊性: 245°C ± 5°C, 5s ± 0.5s