




REV.	SPECIFICATION	ECN NO.	APPD.





Material:
Housing: PBT, UL94V-0, Black.
Contacts: Brass, Gold Plated over Nickel 50u" or 80u"~120u" Tin Plated over Nickel 50u".

Electrical Characteristics:
Current Rating: 3 AMP.
Dielectric Withstanding Voltage: AC 1000V.
Insulation Resistance: 1000MΩ min.
Contact Resistance: 20mΩ max.
Operating Temperature: -40°C~+105°C.
***RoHS Compliant**

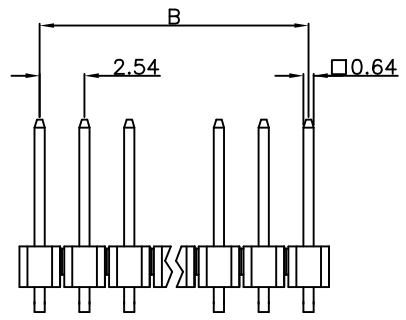

L: Right Angle Type 2

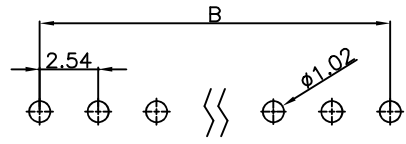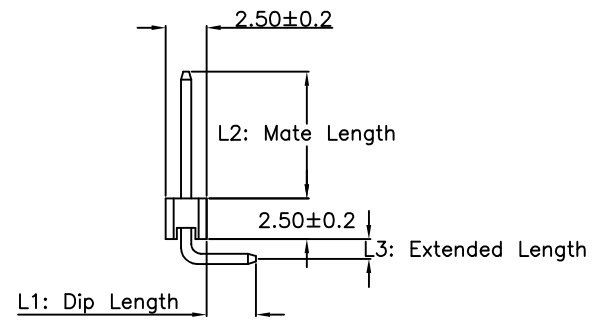

P.C. Board Layout

2011- 1 X xx G 00 L B
Series Single Row No. of Pin Per Row G: Gold Plated T: Tin Plated 00: Gold Flash 10: 10u" 15: 15u" 30: 30u" *Blank: For Tin Plated *150: 150 L: Right Angle Type 2 B: Bulk Package

Position	2 Thru 40
Dimension	2.54 X No. of Positions -0.25
A	2.54 X No. of Positions -0.25
B	2.54 X No. of Positions -2.54

Standard item:
ie: 2011-1XxxG00LB(Dip 3.0mm, Mate 6.0mm, Extended 1.4mm)
Custom item:
ie: 2011-1XxxG00L-3-4-1.4B(2011-1XxxG00L-L1-L2-L3B)
3.0mm Dip Length(increment of 0.10mm)
4.0mm Mate Length(increment of 0.10mm)
1.4mm Extended Length(increment of 0.10mm)

Tolerances	Dwg. No.	2011D01105	Title:	2011 Series	
x = ±0.50	Projection		Pin Header 2.54mm Single Row	 P/N: 2011-1XxxG00LB	
.x = ±0.25	Unit	mm	Scale		1:1
.xx = ±0.15	Drawn By	Jerry 11/14'19	Right Angle Solder Type		① 535
SHEET 1/1 Ver.No. A2					