


Mechanical Specifications

D	0.900" Max
T	0.300" Max
Lead Diameter	0.040" Nom.
S	0.310" Nom
L	1.5" Min
B	0.325" Nom
C	0.147 Nom

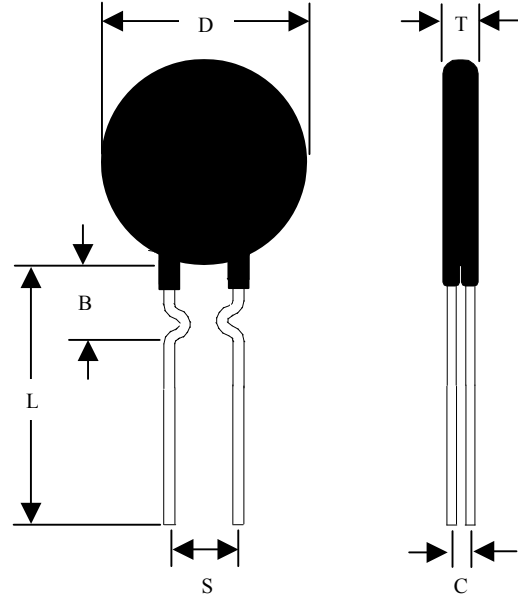

Electrical Specifications

Resistance @ 25°C	2.5 Ω ± 15%
Max Steady State Current Up to 65°C	15.0 A
Actual failure point of instantaneous energy (Joules)	87.0 J
Resistance @ 100% of Max Current	0.03 Ω
Resistance @ 50% of Max Current	0.075 Ω
Body Temperature @ 100% Current rating	212°C
Dissipation Constant	32.4 mW/°C
Thermal Time Constant	94 seconds

Rev.	Date:	Change:	Approval
0	5/28/19	Issue	Mehdi Samii

Ametherm, Inc
961 Fairview Dr.
Carson City, NV 89701
Telephone: **800-808-2434**
Fax: 775 884-0670
www.Ametherm.com