


Mechanical Specifications

D	15.0±0.5 mm
T	4.5±0.2 mm
Lead Diameter	1.0±0.1mm
S	7.8 ±2.0mm
L	38.0±9.0 mm
Straight Leads Coating run down	5.0±1.0mm
B	6.5±0.60mm
C	2.82±0.5mm

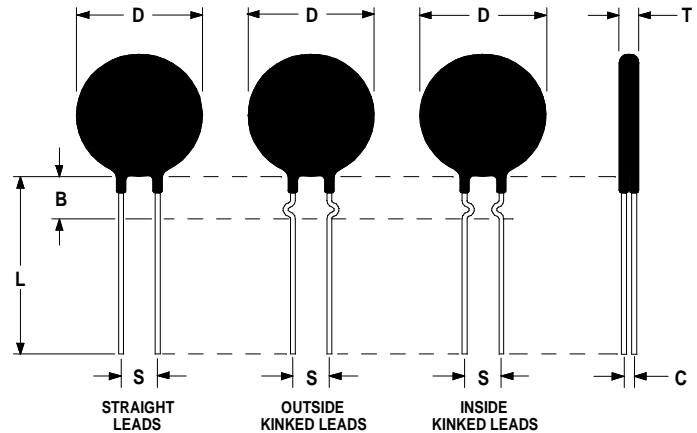

Electrical Specifications

Resistance @ 25°C	7.0 Ω ± 20%
Max Steady State Current Up to 65°C	8.0 A
Max recommended energy rating (Joules)	75.0 J
Actual failure point of instantaneous energy (Joules)	150.0J
Resistance @ 100% of Max Current	0.058 Ω
Resistance @ 50% of Max Current	0.103Ω
Body Temperature @ 100% Current rating	192°C
Dissipation Constant	15.9 mW/°C
Thermal Time Constant	54seconds
Material Type	"C"