

SPECIFICATION



Current Rating:1 AMP
 Insulation Resistance:1000 MΩ Min.
 Contact Resistance:20mΩ Max.
 Dielectric Voltage:500V AC for one minute
 Operation Temperature:-40°C to +105°C

MATERIAL




Insulator: PA9T+30%GF,UL 94V-0
 Contact Pin: Brass

ORDER INFORMATION

5 E H 3 M S D N N - X X X X 3 X U - 0 0

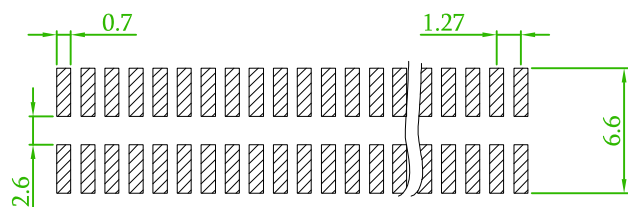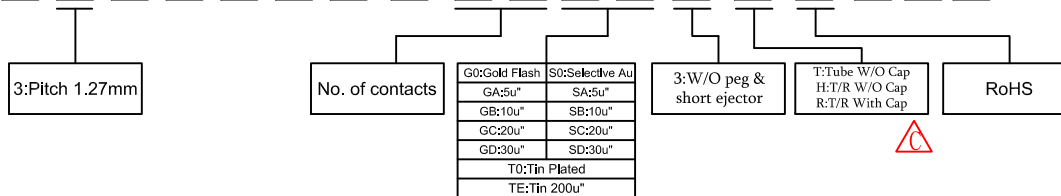

Recommended PCB Layout
 (PCB TOLERANCE ±0.1)

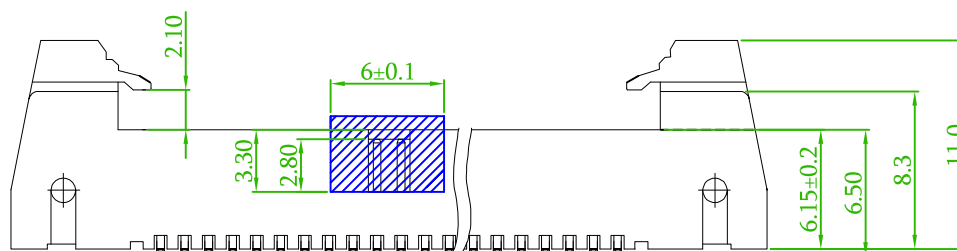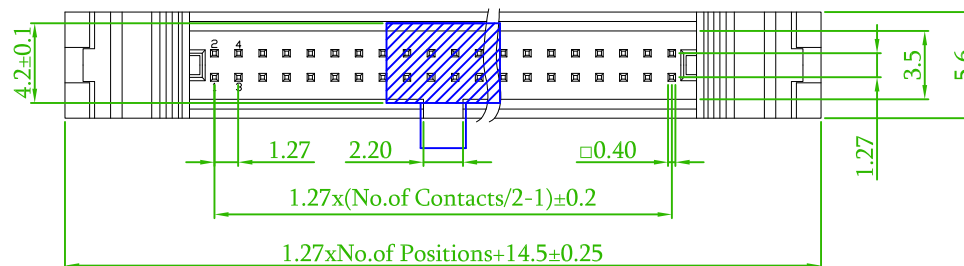

Old Part No. : EDH3M-XX-U

△	Revised the Drawing & Add the package:R:T/R With Cap	Eloise	2017/03/28
△	Revised the Part No. :5EH3MSBNN-XXXX3XU-00 ->5EH3MSDNN-XXXX3XU-00	Jeff	2017/02/08
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

TEL: 886-2-2260-6878
 FAX: 886-2-2260-8030

品名 TITLE	EJECTOR HEADER 1.27mm				頁數 Page	1/1
品號 PART NO.	5EH3MSDNN-XXXX3XU-00			繪圖 DRAWN	Roy 2016/07/12	
圖號 DRAWING NO.	GN016-JF191		版本 REV.	C	核對 CHECKED	Erina 2016/07/12
客戶品號 CUSTOMER P/N			比例 SCALE	None	承認 APPROVED	Boris 2016/07/12
公差 TOLERANCE	.X ± 0.20	.XX ± 0.15	單位 UNIT	mm	THIRD ANGLE PROJECTION	