

SPECIFICATIONS



Current Rating: 1 AMP
 Insulation Resistance: 1000MΩ Min.
 Contact Resistance: 20mΩ Max.
 Dielectric Voltage: 500V AC for one minute
 Operation Temperature: -40°C to +105°C

MATERIAL


Insulator: Hi-Temp. Thermoplastic, UL 94V-0
 Contact Pin: Copper Alloy

ORDER INFORMATION

5 P H 3 S D A 1 0 - 2 X X X X N N X U - A B 000 - 0 0

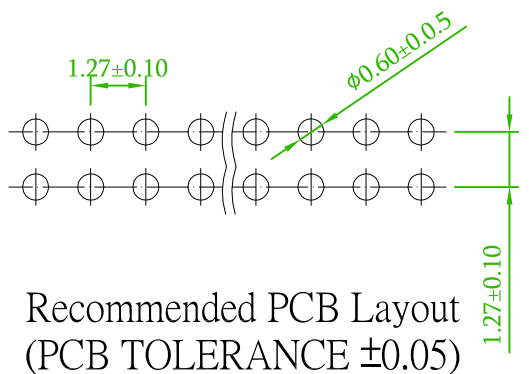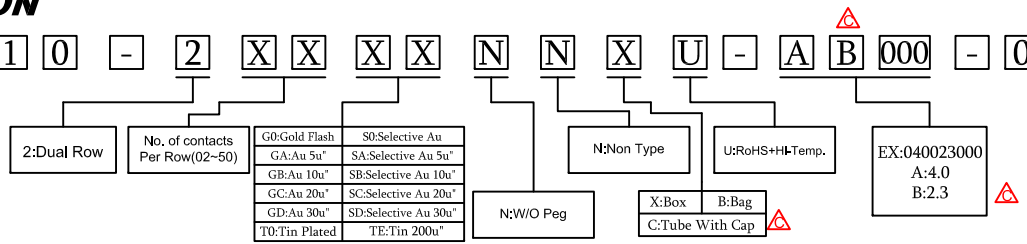

Recommended PCB Layout
 (PCB TOLERANCE ±0.05)

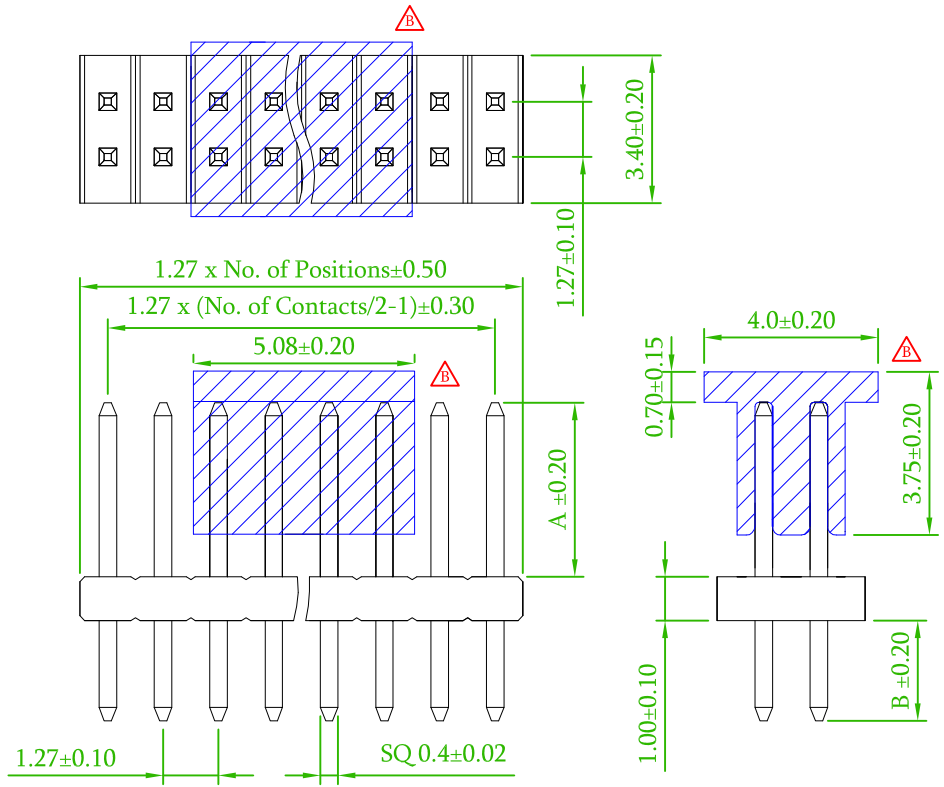

Old Part No. : PH3S10-2XX-U

△	Modify order information	C	2017/02/07 Gary
△	Added Cap Size	B	2016/08/25 Joey
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

品名 TITLE	PIN HEADER 1.27mm PLASTIC HEIGHT 1.0mm DIP Straight				頁數 Page	1/1
品號 PART NO.	5PH3SDA10- 2XXXXNNXU-XXXXXX000-00				繪圖 DRAWN	Roy 2015/08/18
圖號 DRAWING NO.	GN016-GA295	版本 REV.	C	核對 CHECKED	John 2015/08/18	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	John 2015/08/18	
公差 TOLERANCE	.X ±0.35 .XX ±0.25	.X°±3	單位 UNIT	mm	THIRD ANGLE PROJECTION	