

# ORDER INFORMATION



## SPECIFICATION

Current Rating:3 AMP  
 Insulation Resistance:1000MΩ Min.  
 Contact Resistance:20mΩ Max.  
 Dielectric Voltage:1000V AC for one minute  
 Operation Temperature:-40°C to +105°C




## MATERIAL

Insulator:Hi-Temp. Thermoplastic, UL94V-0  
 Contact Pin:Copper alloy

5 P S 1 R D B 5 7 - 2 X X X X N N N A U - 0 0

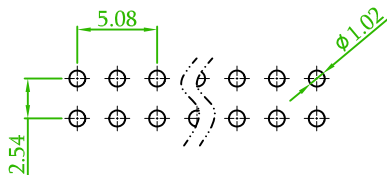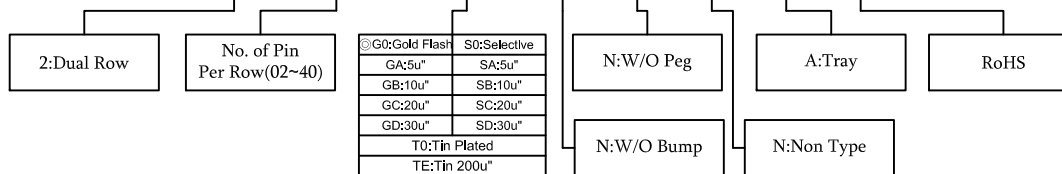

Recommended PCB Layout  
(PCB TOLERANCE ±0.1)

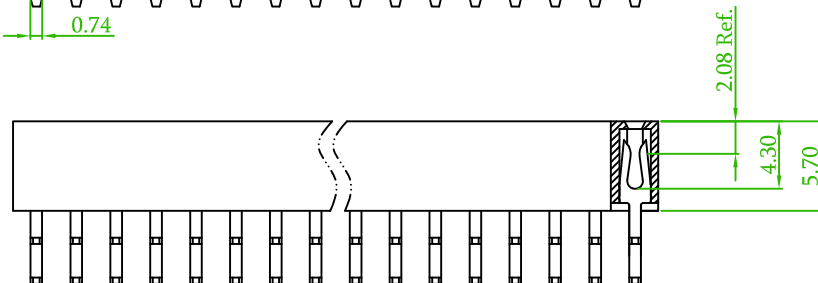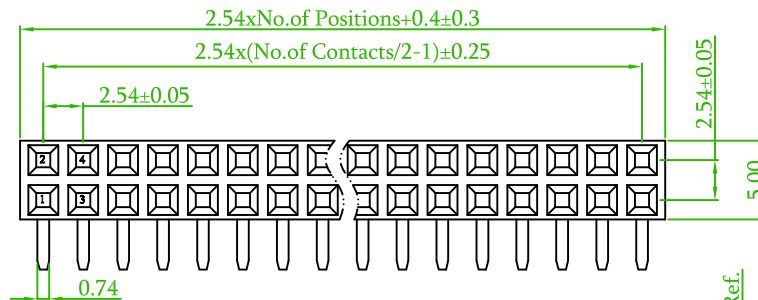

Old Part No. : PS1R57-2XX-U

REV.	DESCRIPTION	REVISED	DATE

糧德精密有限公司  
 Amtek Technology Co., Ltd.  
 TEL: 886-2-2260-6878  
 FAX: 886-2-2260-8030

品名 TITLE	FEMALE HEADER 2.54mm				頁數 Page	1/1
品號 PART NO.	5PS1RDB57-2XXXXNNAU-00				繪圖 DRAWN	Roy 2017/09/18
圖號 DRAWING NO.	GN005-RR014		版本 REV.	A	核對 CHECKED	Jason 2017/09/18
客戶品號 CUSTOMER P/N			比例 SCALE	None	承認 APPROVED	Jason 2017/09/18
公差 TOLERANCE	.X ± 0.30	X°±3°	單位 UNIT	mm	THIRD ANGLE PROJECTION	