SIGN	DATE	DESCRIPTION

THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!

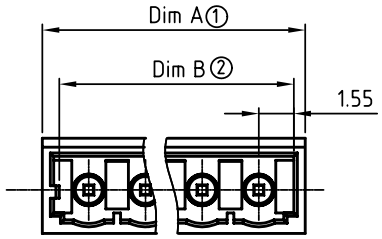

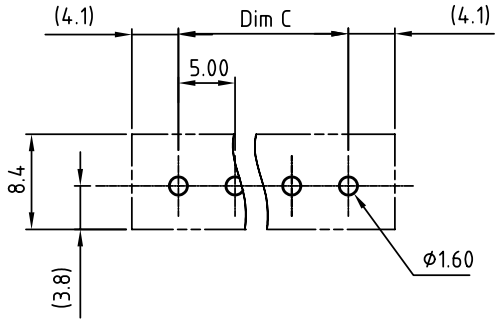

P.C.B LAYOUT

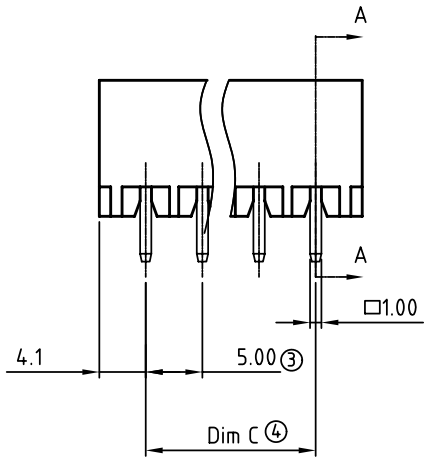

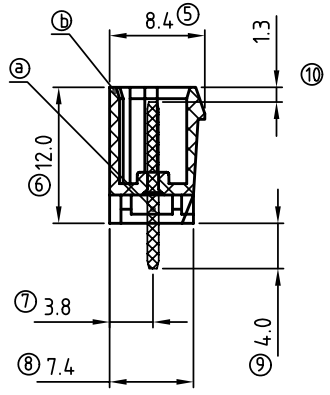

SECTION A-A

Material:

- Item a :Male contact pin: Copper Tin plated
- Item b :Terminal(housing): Thermoplastic (UL94V-0)

Electrical:	cULus
Voltage rating:	300V
Current rating:	8A
Withstanding Voltage:	1.6 KV
Operating temperature:	-40°C to +115°C
Soldering temperature:	250°C±10°C/5 Sec
Safety Approval:	c UL us

NC xx 7 1 x 0 xxxx G

02	2 poles	0	Black (RAL9005)	G: Pb<40,000ppm
03	3 poles	2	Red (RAL3001/D)	
...	...	3	Orange(RAL2011/P)	
24	24 poles	4	Yellow(RAL1018/A)	any special item by customer request, please contact sales department.
		5	Green(RAL6018/T)	
		6	Blue (RAL5015/A)	
		8	Grey(RAL7035/D)	

N = Number of poles

Dim A=Nx5.0+3.2

Dim B=Nx5.0+0.7

Dim C=(N-1)x5.0

	Dim A	Dim B	Dim C
2-6p	±0.20	$^{+0.15}_{-0}$	±0.20
6-12p	±0.30	$^{+0.3}_{-0}$	±0.30
12-24p	±0.40	$^{+0.4}_{-0}$	±0.40

ANYTEK

CUSTOMER CO

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PA
FORM WHATEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHO
PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE	NC 5.0mm Vertical series				
PART NO.	NCxx71x0xxxxG			DWG NO.	8NC0001
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.	
		Runner 2010.08.16	Runner 2010.08.16	UNIT: mm SCALE: 2/1 SHEET: 01/01	REV.: B