




**BC807/BC808**

**PNP SILICON TRANSISTOR**

**SWITCHING AND AMPLIFIER APPLICATIONS**

■ **FEATURES**

- \* Suitable for AF-Driver stages and low power output stages
- \* Complement to BC817 / BC818

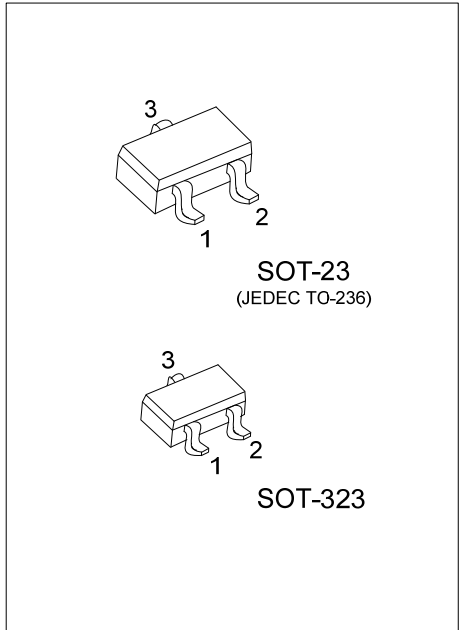

■ **ORDERING INFORMATION**

Ordering Number		Package	Pin Assignment			Packing
Lead Free	Halogen Free		1	2	3	
BC807L-xx-AE3-R	BC807G-xx-AE3-R	SOT-23	B	E	C	Tape Reel
BC807L-xx-AL3-R	BC807G-xx-AL3-R	SOT-323	B	E	C	Tape Reel
BC808L-xx-AE3-R	BC808G-xx-AE3-R	SOT-23	B	E	C	Tape Reel
BC808L-xx-AL3-R	BC808G-xx-AL3-R	SOT-323	B	E	C	Tape Reel

Note: Pin Assignment: B: Base E: Emitter C: Collector

<p>BC807G-xx-AE3-R</p>	<p>(1)Packing Type (2)Package Type (3)Rank (4)Green Package</p>	<p>(1) R: Tape Reel (2) AE3: SOT-23, AL3: SOT-323 (3) xx: refer to Classification of hFE (4) G: Halogen Free and Lead Free, L: Lead Free</p>
------------------------	---	--

■ **MARKING**

807-16	807-25	807-40
<p>L: Lead Free G: Halogen Free</p>	<p>L: Lead Free G: Halogen Free</p>	<p>L: Lead Free G: Halogen Free</p>
808-16	808-25	808-40
<p>L: Lead Free G: Halogen Free</p>	<p>L: Lead Free G: Halogen Free</p>	<p>L: Lead Free G: Halogen Free</p>

# BC807/BC808

## PNP SILICON TRANSISTOR

### ■ ABSOLUTE MAXIMUM RATINGS ( $T_A=25^\circ\text{C}$ , unless otherwise specified)

PARAMETER		SYMBOL	RATINGS	UNIT
Collector-Emitter Voltage	BC807	$V_{CES}$	-50	V
	BC808		-30	V
Collector-Emitter Voltage	BC807	$V_{CEO}$	-45	V
	BC808		-25	V
Emitter-Base Voltage		$V_{EBO}$	-5	V
Collector Current (DC)		$I_C$	-800	mA
Collector Dissipation		$P_C$	310	mW
Junction Temperature		$T_J$	+150	$^\circ\text{C}$
Storage Temperature		$T_{STG}$	-65 ~ +150	$^\circ\text{C}$

Note: Absolute maximum ratings are those values beyond which the device could be permanently damaged.

Absolute maximum ratings are stress ratings only and functional device operation is not implied.

### ■ ELECTRICAL CHARACTERISTICS ( $T_A=25^\circ\text{C}$ , unless otherwise noted)


PARAMETER		SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Collector-Emitter Breakdown Voltage	BC807	$BV_{CEO}$	$I_C=-10\text{mA}, I_B=0$	-45			V
	BC808			-25			V
Collector-Emitter Breakdown Voltage	BC807	$BV_{CES}$	$I_C=-0.1\text{mA}, V_{BE}=0$	-50			V
	BC808			-30			V
Emitter-Base Breakdown Voltage		$BV_{EBO}$	$I_E=-0.1\text{mA}, I_C=0$	-5			V
Collector Cut-OFF Current		$I_{CES}$	$V_{CE}=-25\text{V}, V_{BE}=0$			-100	nA
Emitter Cut-OFF Current		$I_{EBO}$	$V_{EB}=-4\text{V}, I_C=0$			-100	nA
DC Current Gain		$h_{FE1}$	$I_C=-100\text{mA}, V_{CE}=-1\text{V}$	100		630	
		$h_{FE2}$	$I_C=-300\text{mA}, V_{CE}=-1\text{V}$	60			
Collector-Emitter Saturation Voltage		$V_{CE(SAT)}$	$I_C=-500\text{mA}, I_B=-50\text{mA}$			-0.7	V
Base-Emitter ON Voltage		$V_{BE(ON)}$	$I_C=-300\text{mA}, V_{CE}=-1\text{V}$			-1.2	V
Current Gain Bandwidth Product		$f_T$	$V_{CE}=-5\text{V}, I_C=-10\text{mA}, f=50\text{MHz}$		100		MHz
Output Capacitance		$C_{ob}$	$V_{CB}=-10\text{V}, f=1\text{MHz}$			12	pF

### ■ CLASSIFICATION OF $h_{FE}$


RANK	16	25	40
$h_{FE1}$	100-250	160-400	250-630
$h_{FE2}$	60-	100-	170-

## TYPICAL CHARACTERISTICS


Static Characteristic

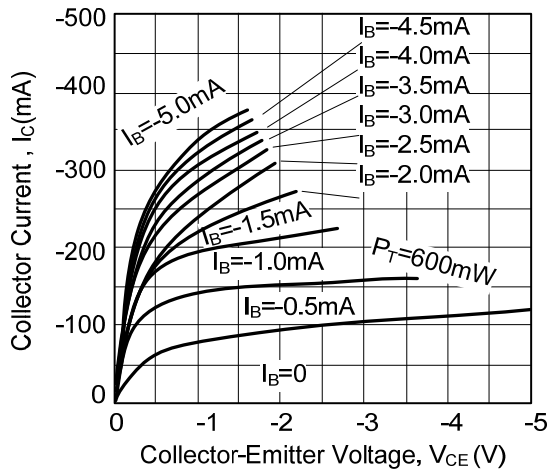


Static Characteristic

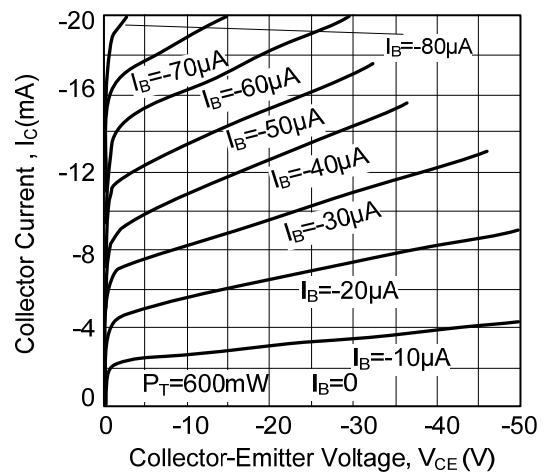


DC Current Gain

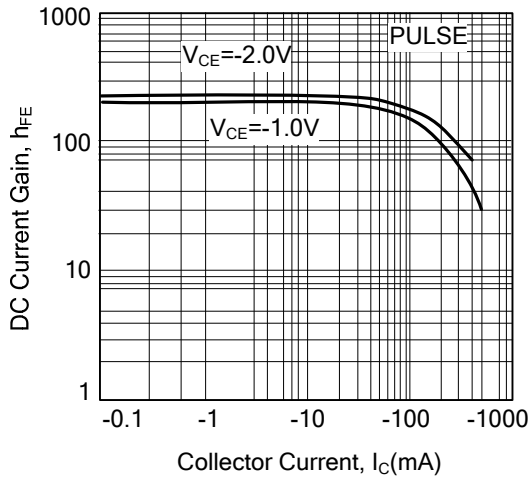


Base-Emitter Saturation Voltage  
Collector-Emitter Saturation Voltage

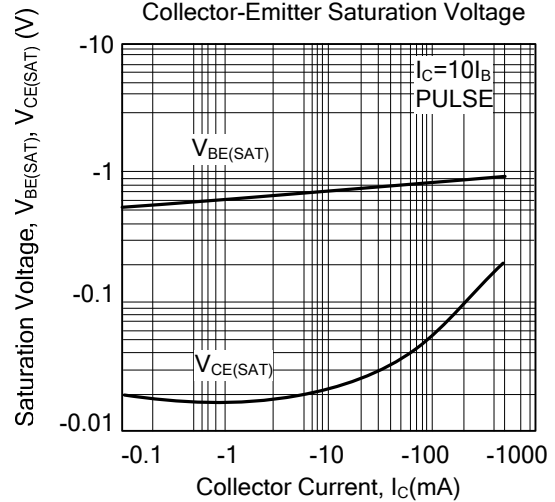


Base-Emitter On Voltage

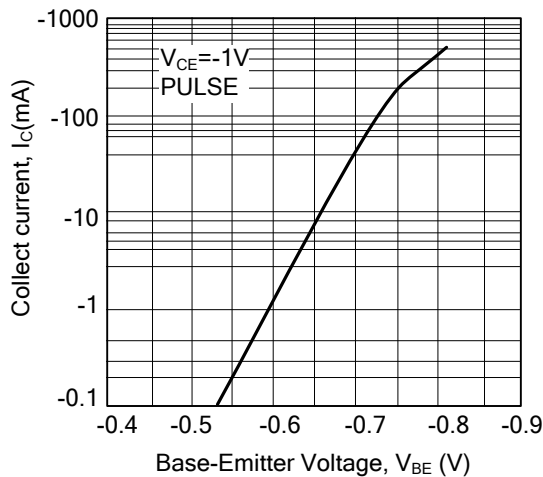

Input Output Capacitance

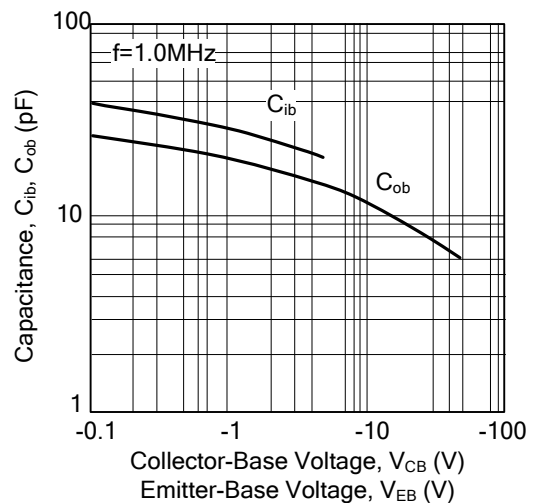

■ TYPICAL CHARACTERISTICS(Cont.)

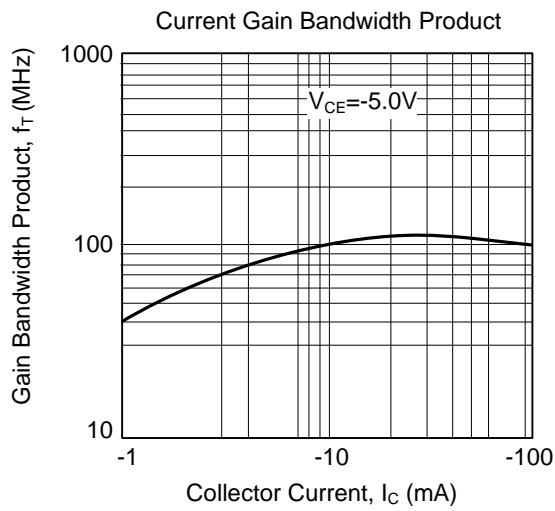

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. UTC reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.