

HARWIN

ARCHER

M50 AND M52 SERIES CONNECTORS

JULY 2021

CONTENTS:

SECTION	TITLE	PAGE
1	Description of Connector and Intended Application	2
2	Marking of Connector and/or Package	2
3	Ratings	3

Sheet: 1 of 4
Issue: 10
Date: 01/07/21
C/Order: 30628


1. DESCRIPTION OF CONNECTOR AND INTENDED APPLICATION

A range of 1.27mm pitch connectors, jumper sockets and IDC cable connectors, comprising vertical surface mount, vertical and horizontal throughboard, plugs and sockets of varying heights. Board-to-board spacing and configuration is obtained by the selection of an appropriate height plug and socket.


- M50 connectors are spaced 1.27mm between rows and based on 0.40mm square/round pins.
- M52 connectors are spaced 2.54mm between rows and based on 0.46mm square pins.

2. MARKING OF THE CONNECTOR AND/OR PACKAGE (ORDER CODE)

The marking (order code) shall appear on the package and shall be of the following style:

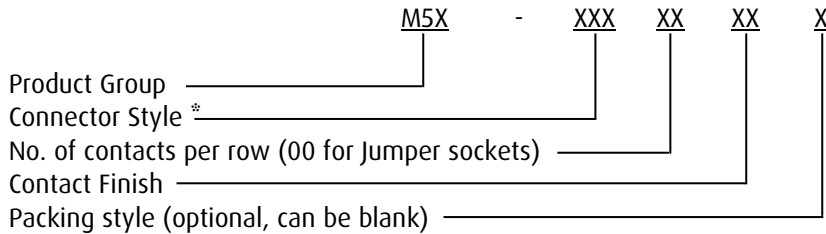

The marking (order code) for a Pin Header variant shall appear on the package and shall be of the following style:

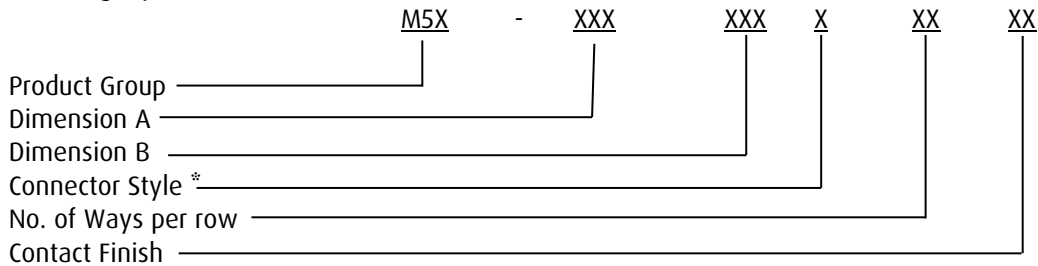

* Connector Style: See individual drawings for connector details.

3. RATINGS

For M50 Pin Header variants, please see the relevant specifications for M50-350, 360 and 390. For M52 Pin Header variants, these are specified as "M52-PH". Note: individual components may exceed above ratings – check individual customer information sheets.

3.1. MATERIAL & FINISH

All materials are listed on individual drawings.

Moulding Material:

PCB connectors.....	High Temperature Thermoplastic, UL94V-0 Black
IDC Cable connectors.....	30% Glass Filled PBT, UL94V-0 Black
Jumper Sockets.....	30% Glass Filled PBT, UL94V-0
Contact Material.....	Copper alloy

Contact Finish:

M50-380	Nickel all over, Gold Flash on contact area
Other connectors: 42 finish code.....	Nickel all over, Gold Flash on contact area, 100% Tin on tails
Other connectors: 45 finish code.....	Gold Flash over Nickel

3.2. ELECTRICAL CHARACTERISTICS

Current Rating (per contact):

M50-315.....	1.5A max
M50-355, M50-365.....	1.75A max
M50-380, M50-90X.....	0.5A max
Others.....	1A max

Contact Resistance (initial)..... 20mΩ max

Contact Resistance (after conditioning)..... 30mΩ max

Dielectric Withstanding Voltage (Voltage Proof):

M50-380	1,000V AC _{rms} for 1 minute
M50-310/312/430/470/480/490	300V AC, 500V DC for 1 minute
M50-311	1,000V AC for 1 minute (initial), 250V AC for 1 minute (final)
M50-303/313/314/315/330/350/353/355/363/365/390/393	500V AC for 1 minute (initial), 250V AC for 1 minute (final)
M50-19X/20X/320	800V AC _{rms} for 1 minute
M50-90X/91X.....	300V DC for 10 seconds
M52-500/510	500V AC, 1,000V DC for 1 minute
Others.....	1,000V AC _{rms} /DC for 1 minute

Insulation Resistance:

M50-355/365	5,000MΩ min
M50-310/312/430/470/480/490	500MΩ min
M50-90X/91X.....	5MΩ min
Others.....	1,000MΩ min

3.3. ENVIRONMENTAL CHARACTERISTICS

Operating Temperature Range:

M50-355/365	-55°C to +125°C
M50-90X/91X.....	-20°C to +105°C
Others.....	-40°C to +105°C

Vibration:

M50-19X/20X/300/320/350/360/380/390, All M52	50-2000Hz, 3.13G _{rms} , duration 45mins
M50-303/313/314/311/315.....	10-55Hz, 10G, duration 2hrs
Others.....	Not tested

Shock:

M50-19X/20X/300/320/350/360/380/390, All M52	30G for 11ms
M50-311/315	50G for 11ms
M50-310/312/430/470/480/490	Not tested

3.4. MECHANICAL CHARACTERISTICS

Durability:

M50-310/312/330/380/430/470/480/490/90X/91X	100 operations
M50-311	600 operations
M50-315	25 operations
M50-353/363/393	500 operations
Others	300 operations

Insertion force (maximum):

M50-19X/20X	10N
M50-320/330/380/90X/91X, M52-500/510	1N per contact
M50-310/312/430	2N per contact
M50-311	0.8N per contact
M50-300/303/313/314/315, M52-501/505/511/515	1.5N per contact

Withdrawal force (minimum):

M50-19X/20X	1.3N
M50-310/312/315/330/380/430/90X/91X	0.15N per contact
M50-320, M52-500/510	0.12N per contact
M50-300, M52-501/505/511/515	0.1N per contact
M50-303/313/314	0.2N per contact

Contact Retention force (minimum):

M50-19X/20X	4N
M50-300/320/350/360/390, M52-PH/501/505/511/515	9.8N per contact
M50-310/312/430/470/480/490, M52-500/510	1.5N per contact
M50-303/311/313/314/315	3N per contact
M50-353/363/393	2N per contact

3.5. SOLDERING DATA

Solderability (PCB connectors):

M50-311	230°C for 3 seconds
M50-315	260°C for 3 seconds
Others	245°C for 5 seconds

Soldering heat resistance (PCB connectors)..... 260°C for 10 seconds