


RoHS COMPLIANT

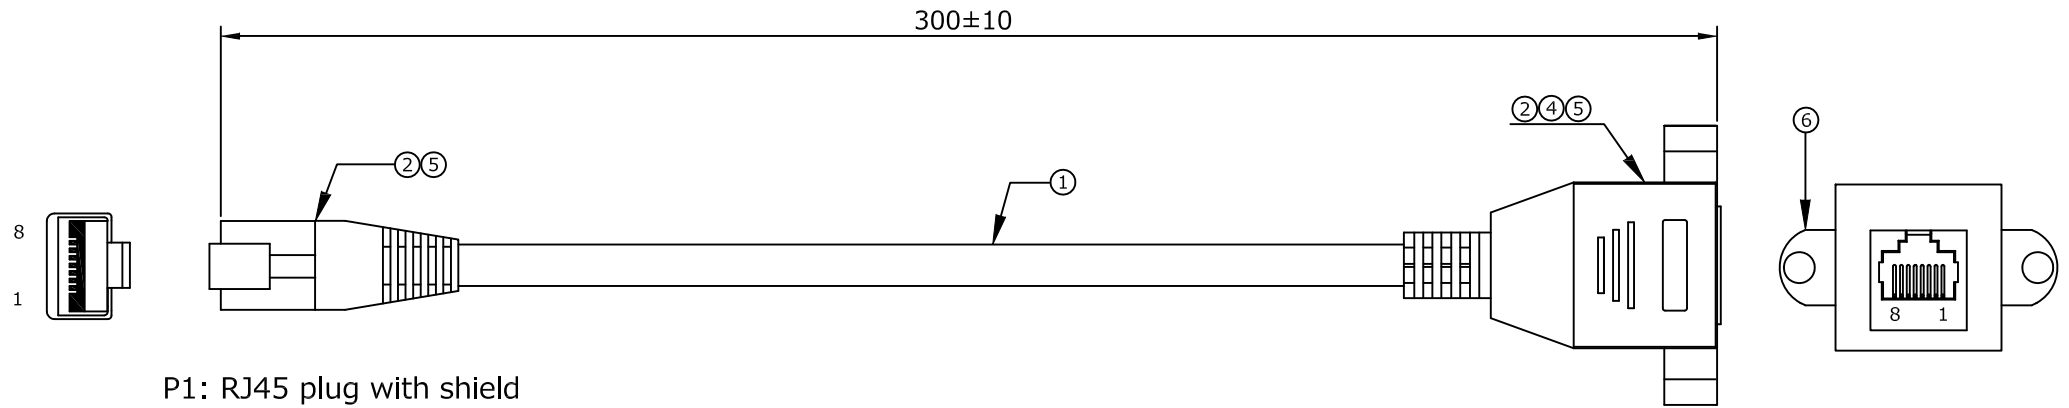

P1: RJ45 plug with shield

P2: RJ45 socket

PASS PIN OUT TEST:

1. 100% OPEN/SHORT TEST
2. CONTACT RESISTANCE: 5Ω/MAX.
3. INSULATION RESISTANCE: 5MΩ/MIN.
4. HI-POT: DC300V/1 MIN.

PIN ASSIGNMENT			
P1			P2
1	Orange/white	1	1
2	Orange	2	2
3	Green/white	3	3
4	Blue	4	4
5	Blue/white	5	5
6	Green	6	6
7	Brown/white	7	7
8	Brown	8	8

6	NUT	M3 Nut	2	PCS
5	OUTER MOLD	PVC, 45P, Black	16	g
4	INNER MOLD	PE	6	g
3	CONN.	RJ45 Socket with shield	1	PCS
2	CONN.	RJ45 Plug with shield, Gold 1u"	1	PCS
1	CABLE	UTP 26AW*4P+AL+D+B OD:5.5, Black, L=300mm		MM
NO.	PART	DESCRIPTION	QTY	UNIT

	PART NO.	CY-202003021	DRAWN	Andrew
	CUSTOMER NO:	CY-202003021	CHECKED	Claudia
	DATE	2020/03/02	APPROVED	Brian

TITLE:	REV.	TOLERANCE	SCALE	UNIT	NO.	DESCRIPTION	DATE
CABLE ASSEMBLY	A0	.X ±0.25 .XX ±0.20	1:1	mm			