

System CI - Technical Specifications

Testing Methods of Electronic Connectors Follow Below Military Standards:

Dielectric Withstanding Voltage	- Per MIL-STD-1344A method 3001.1
Contact Resistance	- Per MIL-STD-1344A method 3002.1
Insulation Resistance	- Per MIL-STD-1344A method 3003.1
Solderability	- Per MIL-STD-202F method 208D

0.80mm Center spacing Wire to Board Connector

Electrical-

Current rating: 0.5 Amp max.
 Dielectric Withstanding: 200 VAC for one minute
 Contact Resistance: < 20 mΩ
 Insulation Resistance: > 100MΩ
 Operating Temperature: -25°C - +85°C

Physical-

Housing: Polyester , Color Nature
 SMT Type Header:
 High temperature plastic , Color Nature
 Flammability Rating: UL 94V-0
 Contacts: Copper Alloy
 Contacts plating: Tin over Nickel

1.00mm Center spacing Wire to Board Connector

Electrical-

Current rating: 1 Amp max.
 Dielectric Withstanding: 500 VAC for one minute
 Contact Resistance: < 20 mΩ
 Insulation Resistance: > 100MΩ
 Operating Temperature: -25°C - +85°C

Physical-

Housing: Polyester , Color Nature
 SMT Type Header:
 High temperature plastic , Color Nature
 Flammability Rating: UL 94V-0
 Contacts: Copper Alloy
 Contacts plating: Tin over Nickel

1.25mm and 1.50mm Center spacing Wire to Board Connector

Electrical-

Current rating: 1 Amp max.
 Dielectric Withstanding: 500 VAC for one minute
 Contact Resistance: < 20 mΩ
 Insulation Resistance: > 100MΩ
 Operating Temperature: -40°C - +85°C

Physical-

Housing: Polyester , Color Nature
 DIP/SMT Type Header:
 High temperature plastic , Color Nature
 Flammability Rating: UL 94V-0
 Contacts: Copper Alloy
 Contacts plating: Tin over Nickel

2.00mm Center spacing Wire to Board Connector

Electrical-

Current rating: 2 Amp max.
 Dielectric Withstanding: 800 VAC for one minute
 Contact Resistance: < 20 mΩ
 Insulation Resistance: > 100MΩ
 Operating Temperature: -25°C - +85°C

Physical-

Housing/DIP Type Header: Nylon 66 , Color Nature
 SMT Type Header:
 High temperature plastic , Color Nature
 Flammability Rating: UL 94V-0
 Contacts: Copper Alloy
 Contacts plating: Tin over Nickel

2.50mm and 2.54mm Center spacing Wire to Board Connector

Electrical-

Current rating: 3 Amp max.
 Dielectric Withstanding: 1000 VAC for one minute
 Contact Resistance: < 20mΩ
 Insulation Resistance: > 1000MΩ
 Operating Temperature: -25°C - +85°C

Physical-

Housing/DIP Type Header:
 Nylon 66 or Glass Filled Polyester , Color Nature
 Flammability Rating: UL 94V-0 or 94V-1 or UL94V-2
 Contacts: Copper Alloy
 Contacts plating: Tin over Nickel

3.96mm and above Center spacing Wire to Board Connector

Electrical-

Current rating: 7 Amp max.
 Dielectric Withstanding: 1500 VAC for one minute
 Contact Resistance: < 20mΩ
 Insulation Resistance: > 1000MΩ
 Operating Temperature: -25°C - +85°C



Physical-

Housing/DIP Type Header:
 Nylon 66 or Glass Filled Polyester , Color Nature
 Flammability Rating: UL 94V-0 or UL94V-2
 Contacts: Copper Alloy
 Contacts plating: Tin over Nickel
 Please see plating code for other options.


CI20 Series 0.60mm(.024") Wire to Board Housing & SMT Headers

- ⊙ Fixed tabs provide PCB hold-down
- ⊙ Locking slots provide secure mating
- ⊙ Insulator: High temperature plastic UL 94V-0, Color Black
- ⊙ Applicable Wire: AWG #34 (Insulation O.D.: $\phi 0.32 \pm 0.02 \text{mm}$)





NEW



RoHS Compliant

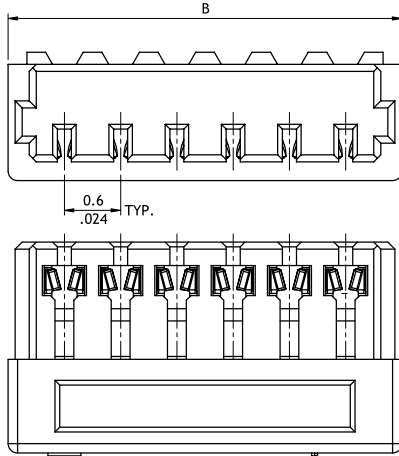

Circuits	Dim. B
5	3.60(.142)
6	4.20(.165)

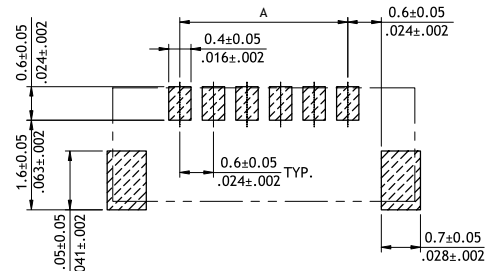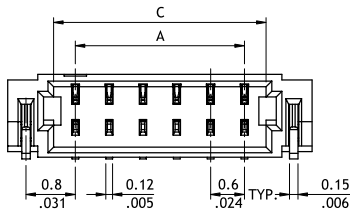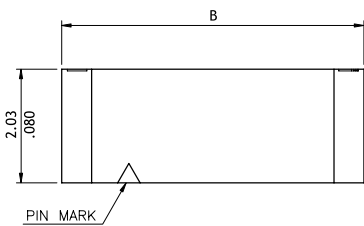

Recommended P.C. Board Layout

Circuits	Dimension		
	A	B	C
5	2.40(.094)	4.80(.189)	3.18(.125)
6	3.00(.118)	5.40(.213)	3.78(.149)

Ordering Code



1 2 3 4 5 - 6
 1 2 3 4 5 6 7 8
CI2006S2000 - NH **CI2006M2HR0 - NH**

- ① Series No.
- ② No. of Circuits: 05, 06
- ③ S = Housing
- ④ Plating Code:
2 = Gold flash over 50 μ "Nickel
- ⑤ Other Options: 000 = Standard
- ⑥ -NH = For Halogen-Free



- ① Series No.
- ② No. of Circuits: 05, 06
- ③ M = SMT Type
- ④ Plating Code: 2 = Gold flash over 50 μ "Nickel
- ⑤ Type: H = Side Entry
- ⑥ Packing Options: R = Tape & Reel
- ⑦ Other Options: 0 = Standard
- ⑧ -NH = For Lead Free IR process and Halogen-Free

CI18 Series 0.80mm(.031") Wire to Board Housing & SMT Headers

- ⊙ Fixed tabs provide PCB hold-down
- ⊙ Insulator: High temperature plastic UL 94V-0, Color Nature
- ⊙ Housing: High temperature plastic UL 94V-0, Color Nature




P/N CI18**S2000-NH

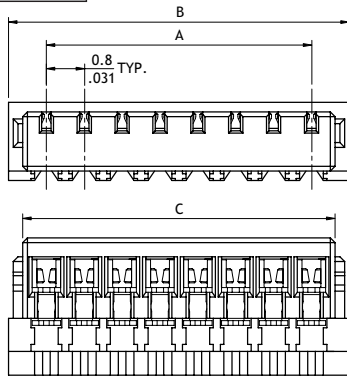

A = 0.8 x No. of Spaces
 B = A + 1.6
 C = A + 1.0


Wire Range	Insulation Diameter
AWG #32	0.39 mm (.015)

P/N CI18**M2HR0-NH

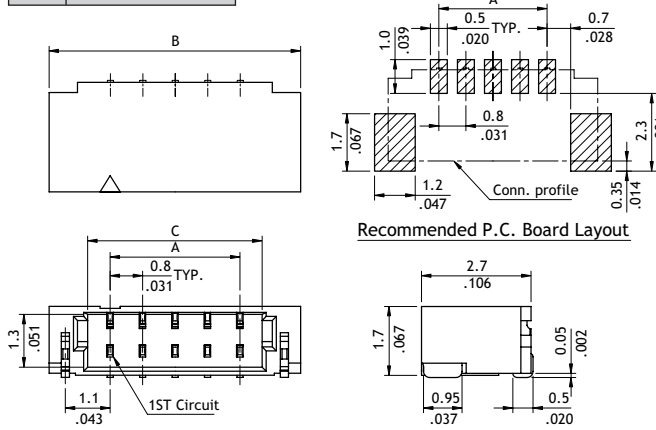

A = 0.8 x No. of Spaces
 B = A + 3.0
 C = A + 1.1

P/N CI18**M2VR0-NH

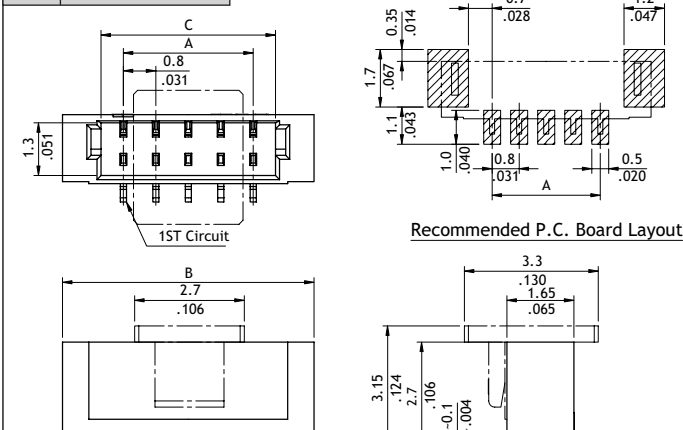

A = 0.8 x No. of Spaces
 B = A + 3.0
 C = A + 1.1

Ordering Code

1 **2** **3** **4** **5** **6**
CI 18 15 S 2 000 - NH


- 1** Series No.
- 2** No. of Circuits: 02 to 15
- 3** S = Housing
- 4** Plating Code:
 1 = Matte Tin over 50μ "Nickel
 2 = Gold flash over 50μ "Nickel
- 5** Other Options: 000 = Standard
- 6** -NH = For Halogen-Free

1 **2** **3** **4** **5** **6** **7** **8**
CI 18 15 M 2 H R 0 - NH




- 1** Series No.
- 2** No. of Circuits: 02 to 15
- 3** M = SMT Type
- 4** Plating Code: 1 = Matte Tin plated over Nickel
 2 = Gold flash over 50μ "Nickel
- 5** Type: V = Top Entry ; H = Side Entry
- 6** Packing Options: R = Tape & Reel
- 7** Other Options: 0 = Standard
- 8** -NH = For Lead Free IR process and Halogen-Free

CI11 Series 1.00mm(.039") Single Row Wire to Board Housing & Terminal



- Insulator: Polyester UL 94V-0, Color Nature
- Terminal: Tin plated, Phosphor Bronze
- Mate with CI11 headers
- Compact design
- Protrusions design for easy pull out

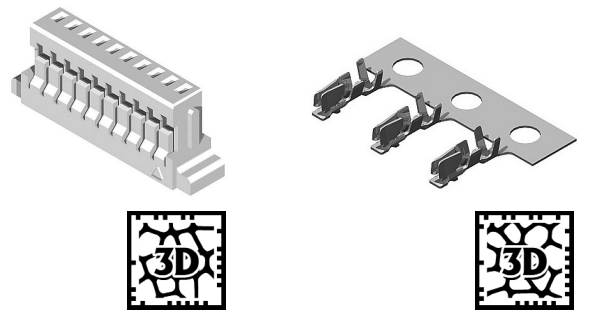



RoHS Compliant  

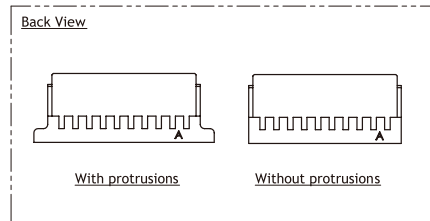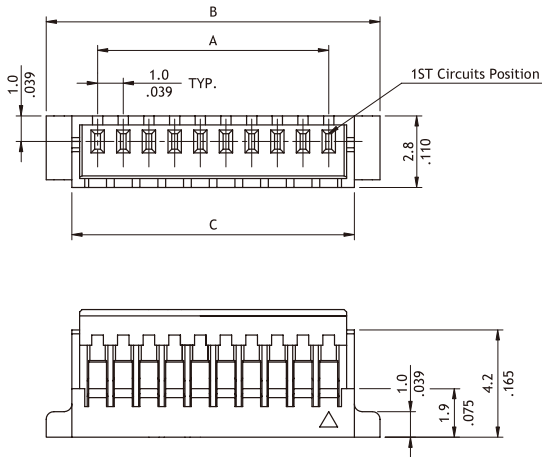

A = 1.0 x No. of Spaces
 B = A + 4.0
 C = A + 2.0

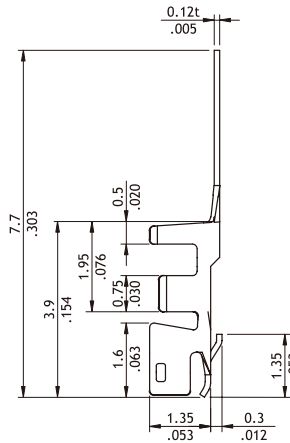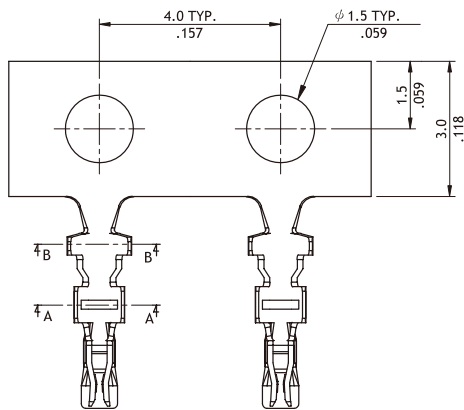

Wire Range	Insulation Diameter	Reel Q'ty
AWG #28-#32	0.4-0.8(mm) (.016-.031)	16,000 PCS



Ordering Code

① CI ② 11 ③ 15 ④ S ⑤ 0 ⑥ 000 - ⑦ NH



- ① Series No.
- ② No. of Circuits: 02 to 15, 18, 20, 26
- ③ S = Housing
- ④ 0 = With Protrusions
N = Without Protrusion
- ⑤ Other Options: 000 = Standard
*Special options consult manufacturer
- ⑥ -NH = Halogen-Free

① CI ② 11 ③ T01 ④ 1 ⑤ PP ⑥ 0


- ① Series No.
- ② Type: T01 = AWG #28 ~ #32
- ③ Plating Code:
1 = Tin over Nickel
- ④ Material: P = Phosphor Bronze
- ⑤ Plating Method: P = Post Plating
- ⑥ Other Options: 0 = Standard

CI11 Series 1.00mm(.039") Single Row Wire to Board SMT Headers


- ⊙ Polarization and Low-profile
- ⊙ Locking slots provide secure mating
- ⊙ Fixed tabs provide PCB hold-down
- ⊙ Mate with CI11 housing
- ⊙ With Tin plated SMT type contact



Top Entry

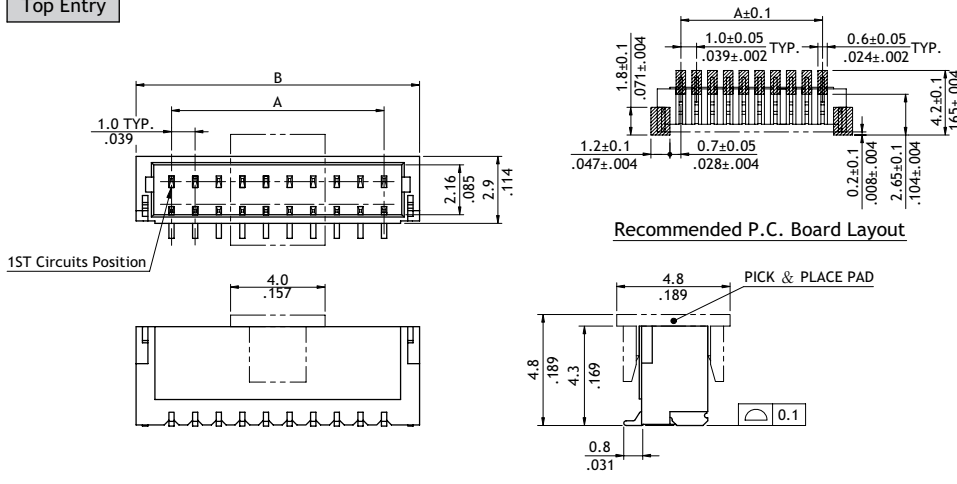

Side Entry

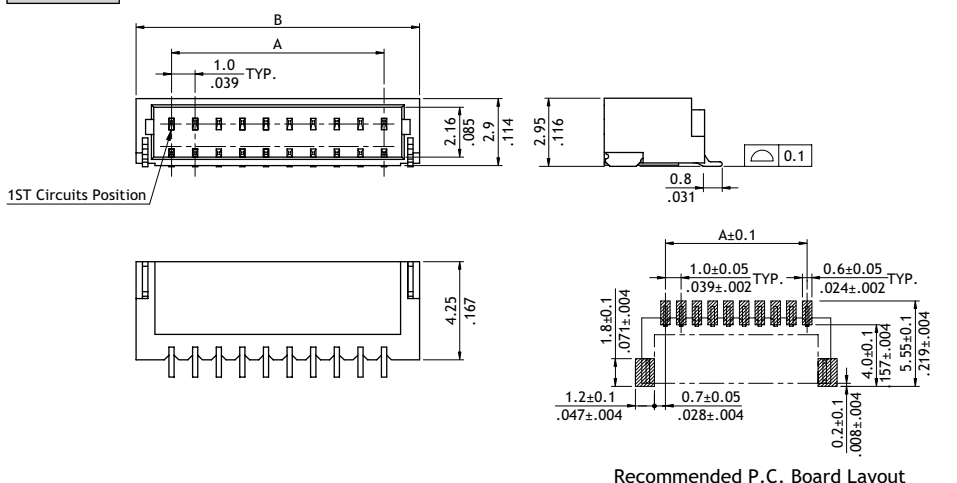

Circuits	Dimension	
	A	B
2	1.0(.039)	4.0(.157)
3	2.0(.079)	5.0(.197)
4	3.0(.118)	6.0(.236)
5	4.0(.157)	7.0(.276)
6	5.0(.197)	8.0(.315)
7	6.0(.236)	9.0(.354)
8	7.0(.276)	10.0(.394)
9	8.0(.315)	11.0(.433)
10	9.0(.354)	12.0(.472)
11	10.0(.394)	13.0(.512)
12	11.0(.433)	14.0(.551)
13	12.0(.472)	15.0(.591)
14	13.0(.512)	16.0(.630)
15	14.0(.551)	17.0(.669)
18	17.0(.669)	20.0(.787)
20	19.0(.748)	22.0(.866)
26	25.0(.984)	28.0(1.102)




Ordering Code

① CI ② 11 ③ M ④ 1 ⑤ V ⑥ R0 - ⑦ NH


- ① Series No.
- ② No. of Circuits:
02 to 15, 18, 20, 26
- ③ M = SMT Type
- ④ Plating Code: 1 = Matte Tin over Nickel
- ⑤ Type: V = Top Entry
H = Side Entry
- ⑥ Packing Options:
R0 = Tape & Reel
(Top entry type with pick & place pad)
T0 = Tube
- ⑦ -LF = For Lead Free soldering process
-NH = For Lead Free soldering process and Halogen-Free

CI11 Series 1.00mm(.039") Dual Row Wire to Board Housing & Terminal

- ⊙ Insulator: Polyester UL 94V-0, Color Nature
- ⊙ Terminal: Tin plated, Phosphor Bronze
- ⊙ Mate with CI11 headers
- ⊙ Compact design
- ⊙ Protrusions design for easy pull out

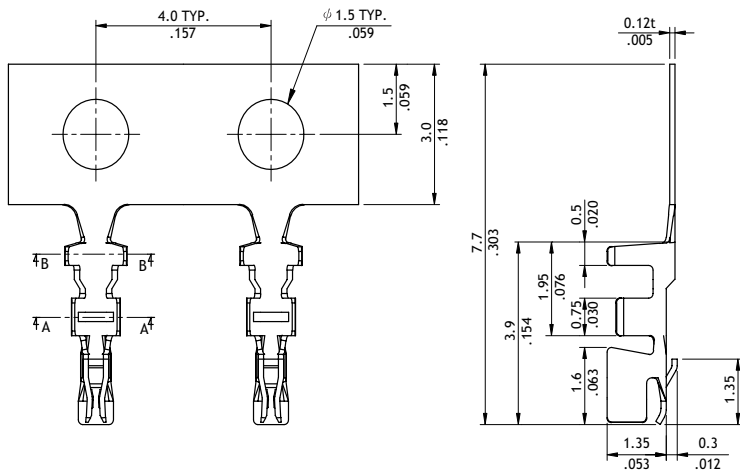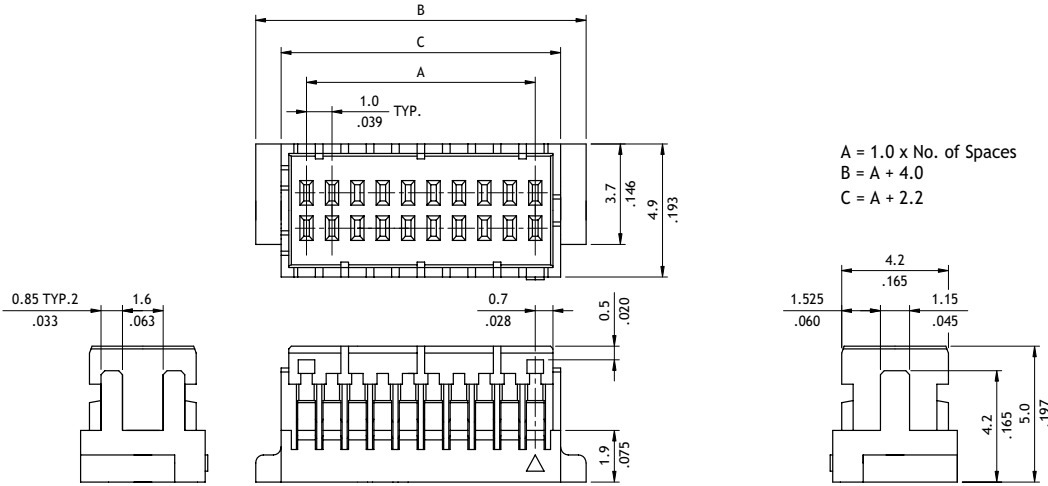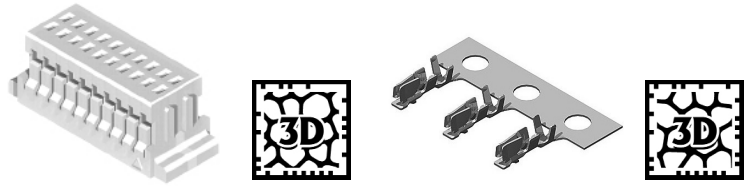

Wire Range	Insulation Diameter	Reel Qty
AWG #28-#32	0.4-0.8(mm) (.016-.031)	16,000 PCS



Ordering Code


1 2 3 4 5 6 1 2 3 4 5 6
CI1150SD000-NH **CI11T011PPH**

- ① Series No.
- ② No. of Circuits: 14, 16, 20, 30, 40, 50
- ③ S = Housing
- ④ D = Dual Row Type
- ⑤ Other Options: 000 = Standard
*Special options consult manufacturer
- ⑥ -NH = Halogen-Free


- ① Series No.
- ② Type: T01 = AWG #28 ~ #32
- ③ Plating Code: 1 = Tin over Nickel
- ④ Material: P = Phosphor Bronze
- ⑤ Plating Method: P = Post Plating
- ⑥ Other Options:
H = Low Single contact force

CI11 Series 1.00mm(.039") Dual Row Wire to Board SMT Headers


- Polarization and Low-profile
- Locking slots provide secure mating
- Fixed tabs provide PCB hold-down
- With Tin plated SMT type contact

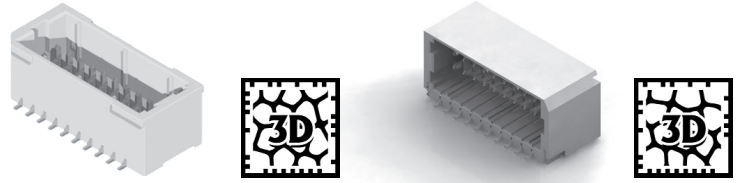

Top Entry

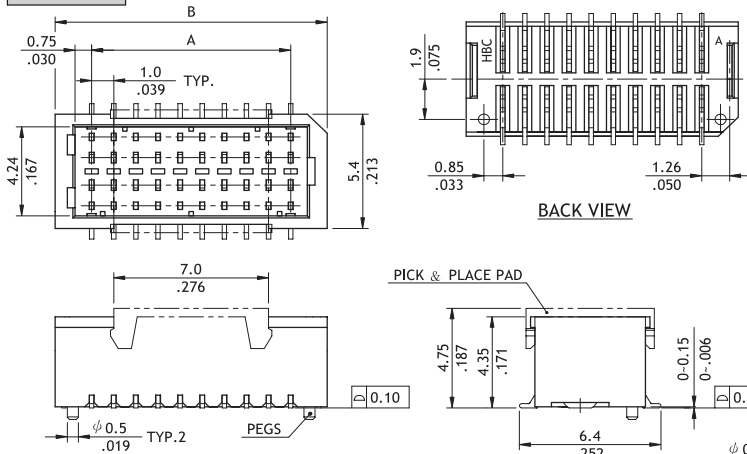


Circuits	Dimension	
	A	B
14	6.0(.236)	9.3(.366)
16	7.0(.276)	10.3(.406)
20	9.0(.354)	12.3(.484)
30	14.0(.511)	17.3(.681)
40	19.0(.748)	22.3(.878)
50	24.0(.945)	27.3(1.075)

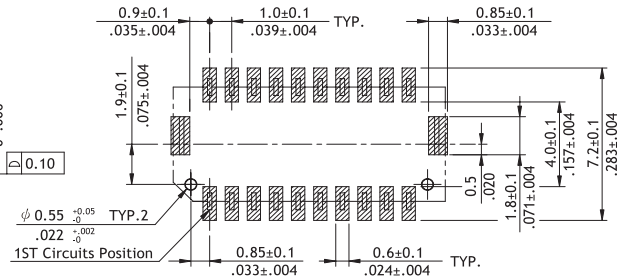


Recommended P.C. Board Layout

Side Entry

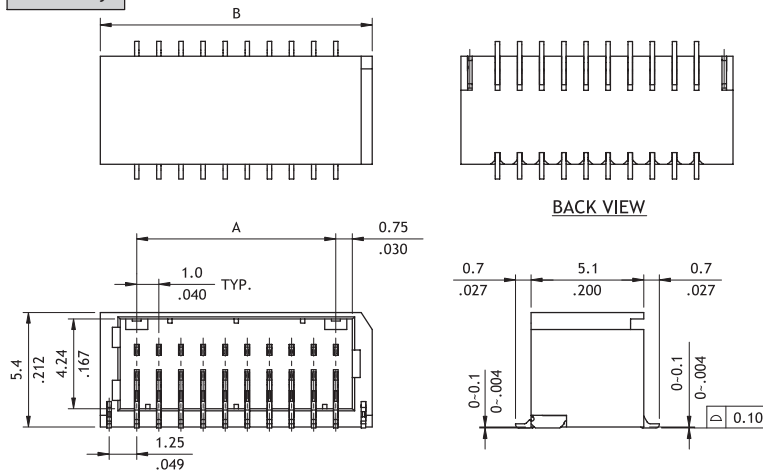

Circuits	Dimension	
	A	B
12	5.0(.197)	8.3(.327)
16	7.0(.276)	10.3(.406)
20	9.0(.354)	12.3(.484)
30	14.0(.551)	17.3(.681)
40	19.0(.748)	22.3(.878)
50	24.0(.945)	27.3(1.075)

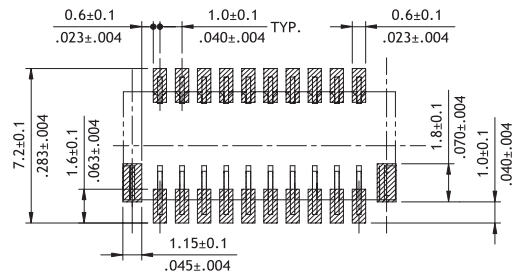

Recommended P.C. Board Layout

Ordering Code



① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨
CI1150M2VD0 - R0 - NH

- ① Series No.
- ② No. of Circuits
 Top Entry: 14,16,20,30,40,50
 Side Entry: 12,16,20,30,40,50
- ③ M = SMT Type
- ④ Plating Code:
 2 = Gold flash over Nickel
- ⑤ Type: V = Top Entry
 H = Side Entry
- ⑥ D = Dual Row type
- ⑦ Pegs Options:
 Top Entry: 0 = With Pegs (Standard)
 1 = Without Peg
 Side Entry: 0 = Standard
- ⑧ Packing Options:
 R0 = Tape & Reel
 T0 = Tube
- ⑨ -NH = For Lead Free IR process and Halogen-Free

CI16 Series 1.00mm(.039") Wire to Board Connectors Housing & Terminal

- ⊙ Mate with CI16 header
- ⊙ Can be used CI16 crimp clip terminal
- ⊙ Insulator: Nylon 66 UL 94V-0, Color Nature


RoHS Compliant 






NEW




P/N CI16**SL00A-NH

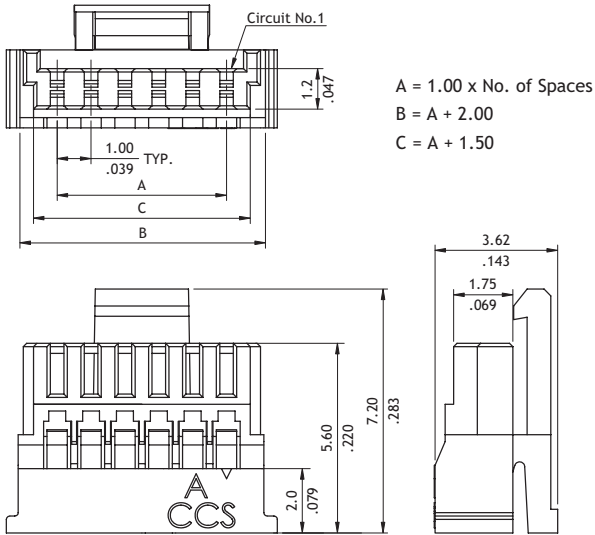


P/N CI16**SL000-NH

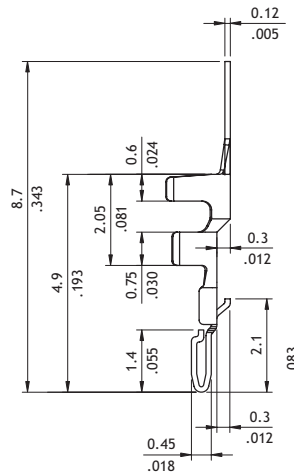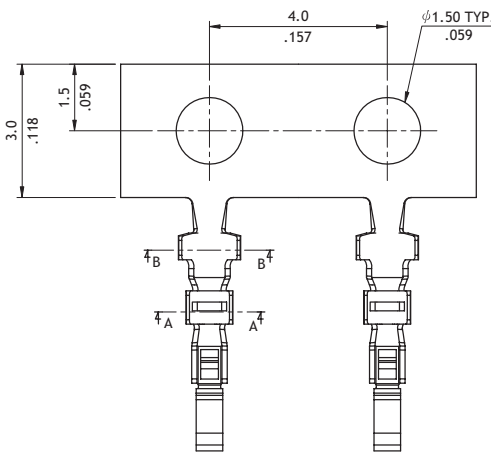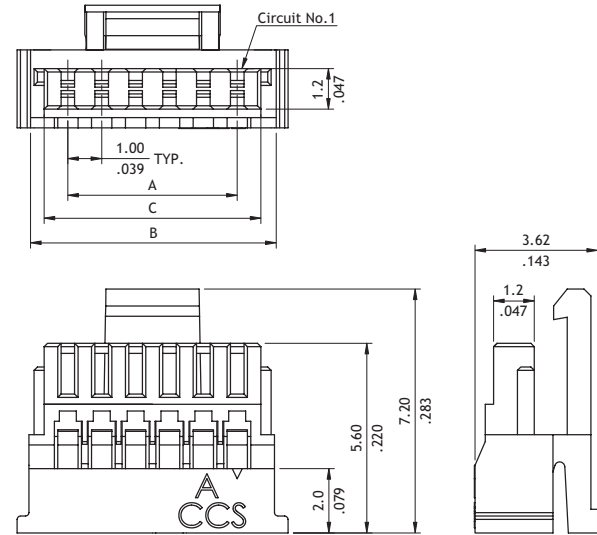

Wire Range	Insulation Diameter	Reel Q'ty
AWG #28-#32	0.78-0.92(mm) (.031-.036)	16,000 PCS.



SEC.: A-A



SEC.: B-B

Ordering Code

1 **2** **3** **4** **5** **6**
CI16 20 SL 000 - NH



- 1 Series No.
- 2 No. of Circuits: 02 to 20
- 3 S = Connector housing
- 4 L = With Locking Latch
- 5 Other Options: 000 = Standard
00A = Type 1
- 6 -NH = Halogen-Free

1 **2** **3** **4** **5** **6**
CI16 T01 1 P E 0


- 1 Series No.
- 2 Type: T01 = AWG #28 ~ #32
- 3 Plating Code: 1 = Tin plated over Nickel
- 4 Material: P = Phosphor Bronze
- 5 Plating Method: E = Pre-tinned
- 6 Other Options: 0= Standard

CI16 Series 1.00mm(.039") Wire to Board Connectors SMT Headers



- ⊙ Fixed tabs provide PCB hold-down
- ⊙ Mate with CI16 housing
- ⊙ Insulator: High temperature plastic UL 94V-0, Color Nature
- ⊙ Terminal: Tin plated Phosphor Bronze



Top Entry

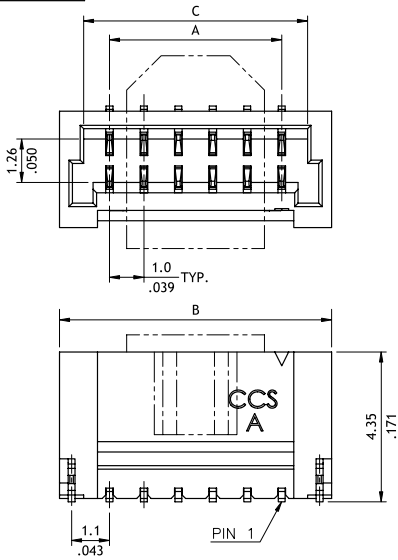


A = 1.00 x No. of Spaces
 B = A + 2.90
 C = A + 1.50

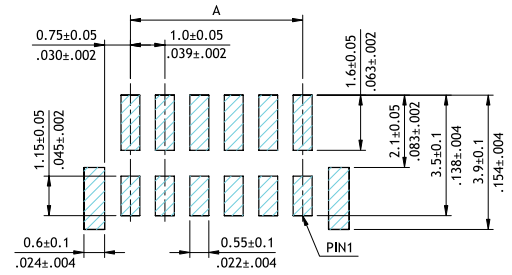
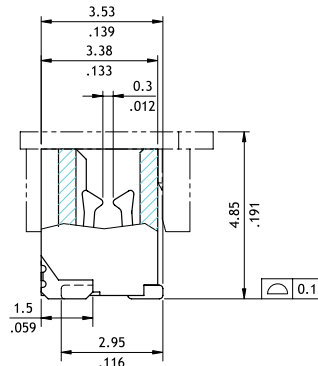


Recommended P.C. Board Layout

Side Entry

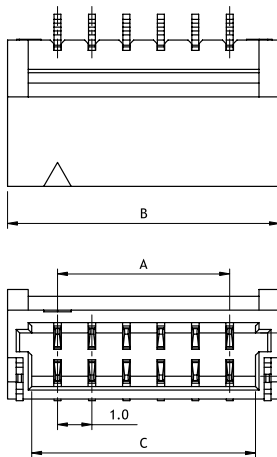

A = 1.00 x No. of Spaces
 B = A + 2.90
 C = A + 1.50

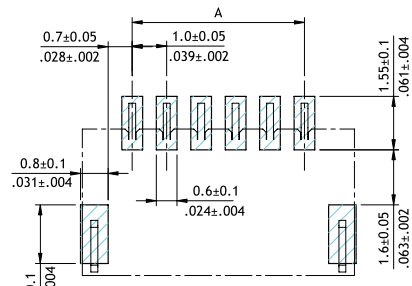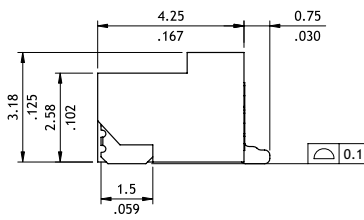

Recommended P.C. Board Layout


Ordering Code

1 CI **2** 16 **3** M **4** 1 **5** V **6** R **7** 0 - **8** NH


- 1** Series No.
- 2** No. of Circuits: 02 to 20
- 3** M = SMT Type
- 4** Plating Code: 1 = Matte Tin over Nickel
- 5** Type: V = Top Entry
H = Side Entry
- 6** Packing Options: R = Tape & Reel
- 7** Other Option: 0 = Standard (Side Entry only)
A = Type 1 (Top Entry only)
- 8** -NH = For Lead Free IR Process and Halogen-Free

CI14 Series 1.00mm(.039") Wire to Board Connectors Housing & Terminal




- Mate with CI14 Header
- Can be used CI14 crimp clip terminal
- Insulator: Glass filled polyester UL 94V-0, Color Nature
- Terminal: Tin plated Phosphor Bronze

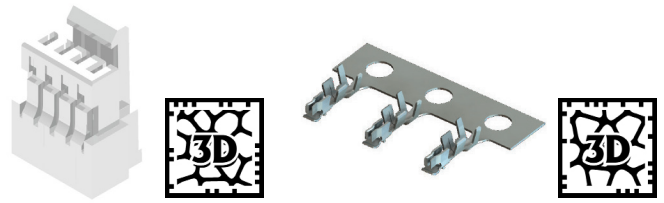


Without Latch Type

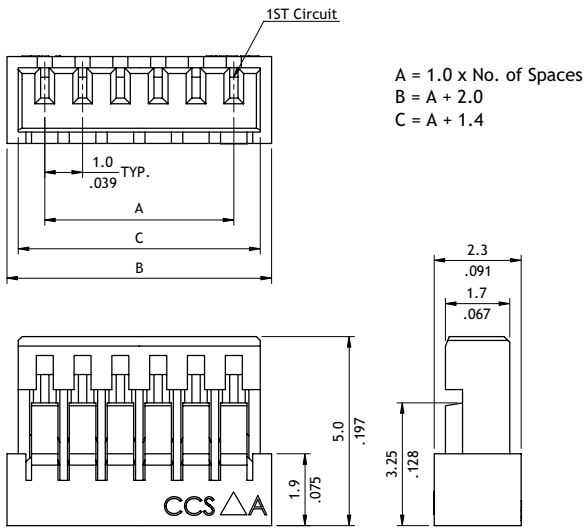

With Latch Type

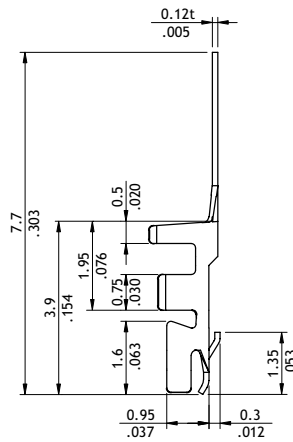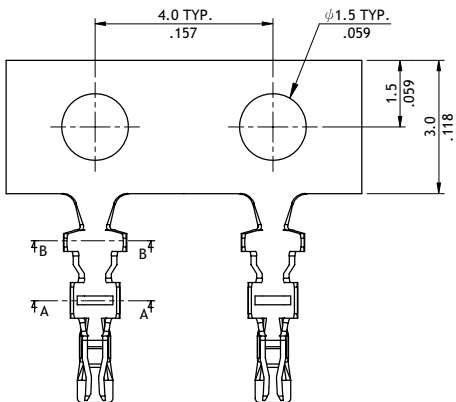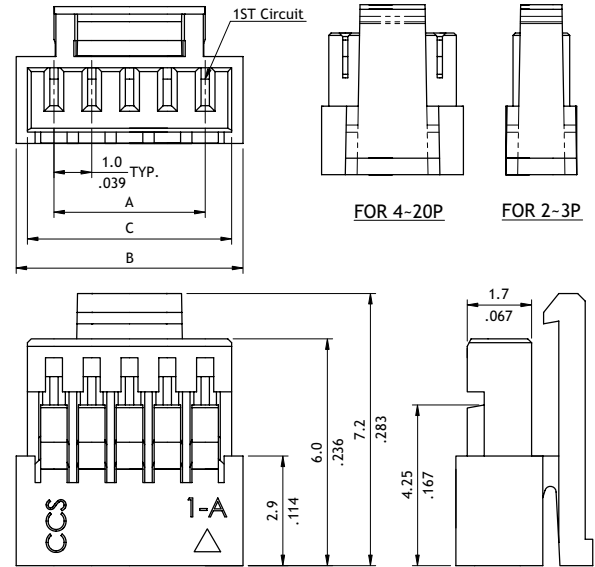

Wire Range	Insulation Diameter	Reel Q'ty
AWG #28-#32	0.65-0.92(mm) (.026-.036)	16,000 PCS.



Ordering Code

1 2 3 4 5
CI14 20S 000A - NH

- ① Series No.
- ② No. of Circuits: 02 to 20
- ③ S = Housing
- ④ 000A = Without Locking Latch
 L000 = With Locking Latch
- ⑤ -NH = Halogen-Free


1 2 3 4 5 6
CI14 T01 1PE 0

- ① Series No.
- ② Type: T01 = AWG #28 ~ #32
- ③ Plating Code: 1 = Tin plated
- ④ Material: P = Phosphor Bronze
- ⑤ Plating Method: E = Pre-tinned
- ⑥ Other Options: 0 = Standard


CI14 Series 1.00mm(.039") Wire to Board SMT Side Entry Headers

- ⊙ Fixed tabs provide PCB hold-down
- ⊙ Mate with CI14 Housing
- ⊙ Insulator: High temperature plastic UL 94V-0, Color Nature

RoHS Compliant


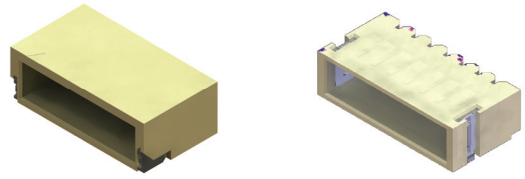


P/N CI14**M1HR0-NH

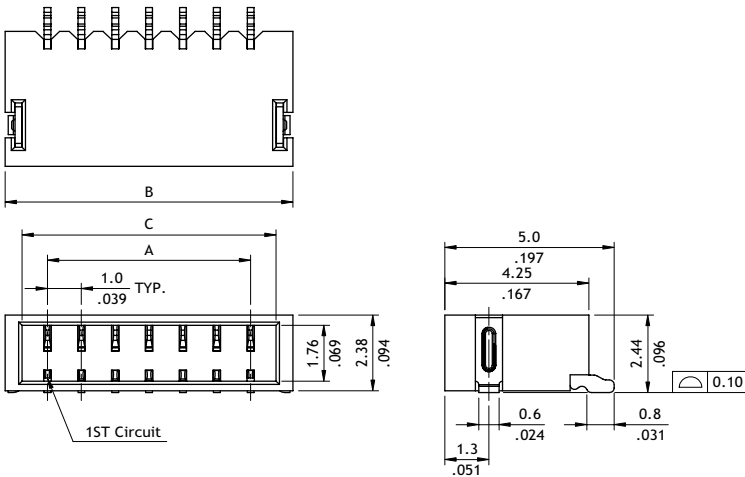


Circuits	Dimension		
	A	B	C
2	1.0(.039)	3.5(.138)	2.5(.098)
3	2.0(.079)	4.5(.177)	3.5(.138)
4	3.0(.118)	5.5(.216)	4.5(.177)
5	4.0(.157)	6.5(.256)	5.5(.216)
6	5.0(.197)	7.5(.295)	6.5(.256)
7	6.0(.236)	8.5(.335)	7.5(.295)
8	7.0(.276)	9.5(.374)	8.5(.335)
9	8.0(.315)	10.5(.413)	9.5(.374)
10	9.0(.354)	11.5(.453)	10.5(.413)
11	10.0(.394)	12.5(.492)	11.5(.453)
12	11.0(.433)	13.5(.531)	12.5(.492)
13	12.0(.472)	14.5(.571)	13.5(.531)
14	13.0(.512)	15.5(.610)	14.5(.571)
15	14.0(.551)	16.5(.650)	15.5(.610)
16	15.0(.590)	17.5(.689)	16.5(.650)
17	16.0(.630)	18.5(.728)	17.5(.689)
18	17.0(.669)	19.5(.768)	18.5(.728)
19	18.0(.709)	20.5(.807)	19.5(.768)
20	19.0(.748)	21.5(.846)	20.5(.807)

P/N CI14**M1HRL-NH

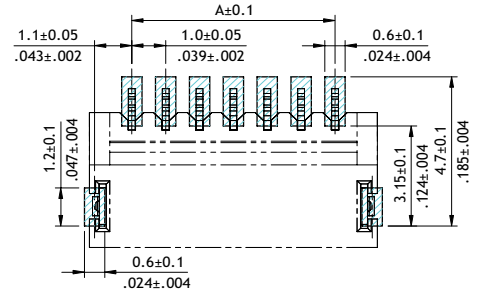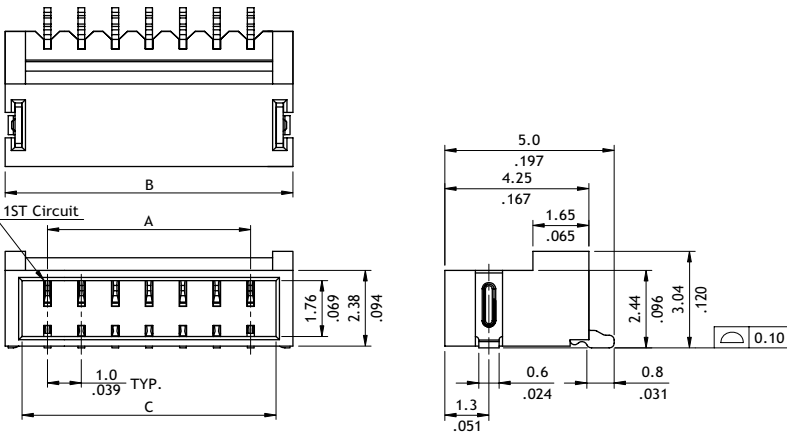

Recommended P.C. Board Layout

P/N CI14**M1HRC-NH

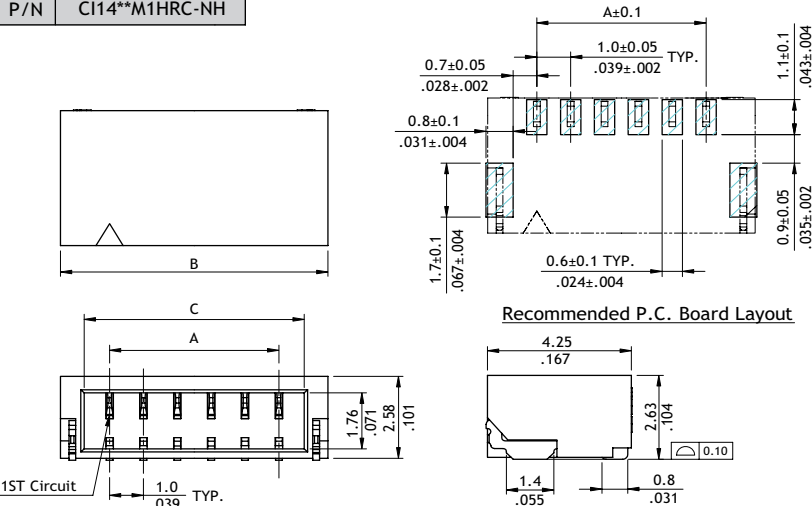


Recommended P.C. Board Layout

Circuits	Dimension		
	A	B	C
2	1.0(.039)	3.9(.154)	2.5(.098)
3	2.0(.079)	4.9(.193)	3.5(.138)
4	3.0(.118)	5.9(.232)	4.5(.177)
5	4.0(.157)	6.9(.272)	5.5(.216)
6	5.0(.197)	7.9(.311)	6.5(.256)
7	6.0(.236)	8.9(.350)	7.5(.295)
8	7.0(.276)	9.9(.390)	8.5(.335)
9	8.0(.315)	10.9(.429)	9.5(.374)
10	9.0(.354)	11.9(.469)	10.5(.413)
11	10.0(.394)	12.9(.508)	11.5(.453)
12	11.0(.433)	13.9(.547)	12.5(.492)


CI14 Series 1.00mm(.039") Wire to Board SMT Side / Top Entry Headers

- ⊙ Fixed tabs provide PCB hold-down
- ⊙ Mate with CI14 Housing
- ⊙ Insulator: High temperature plastic UL 94V-0, Color Nature



RoHS Compliant   

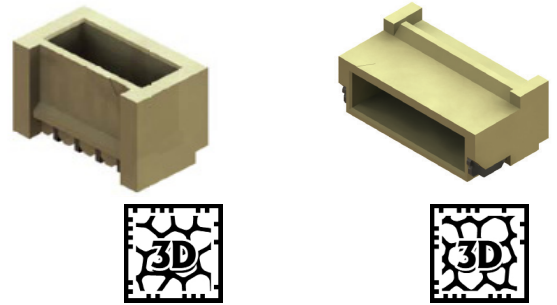

P/N CI14**M1VL0-NH

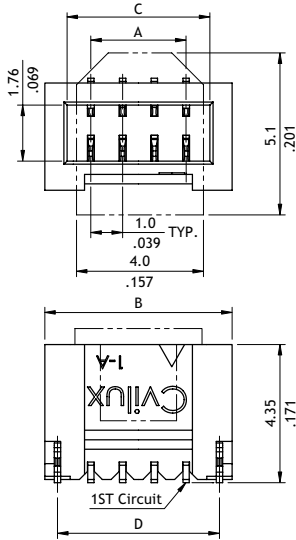


A = 1.0 x No. of Spaces
 B = A + 2.7
 C = A + 1.5
 D = A + 2.0

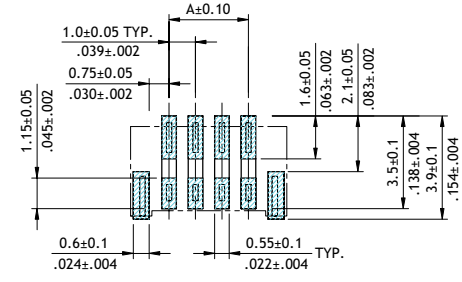



Recommended P.C. Board Layout (2)

P/N CI14**M1HRE-NH

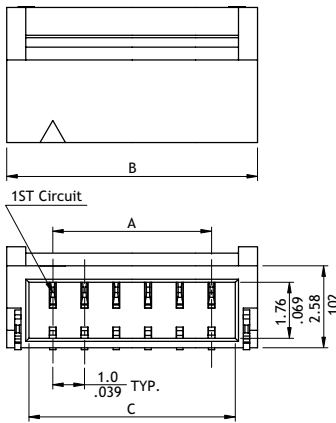

A = 1.0 x No. of Spaces
 B = A + 2.9
 C = A + 1.5

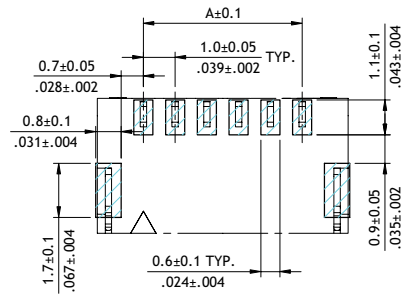

Recommended P.C. Board Layout



Ordering Code

① CI 14 ② 0 6 ③ M ④ 1 ⑤ H ⑥ RC - ⑦ NH







- ① Series No.
- ② No. of Circuits:
- ③ M = SMT Type
- ④ Plating Code: 1 = Matte Tin over Nickel
- ⑤ Type: V = Top Entry, H = Side Entry
- ⑥ Other Options:
 R0 = Normal Type with Reel Packing (H Type, 02 to 20)
 RL = Normal Lock Type with Reel Packing (H Type, 02 to 20)
 RC = Short Type with Reel Packing (H Type, 02 to 12)
 RE = Short Lock Type with Reel Packing (H Type, 02 to 12)
 L0 = Locking Type with Reel Packing (V Type, 03 to 12)
- ⑦ -NH = For Lead Free IR process and Halogen-Free

CI14 Series 1.00mm(.039") Wire to Board Housing & SMT Side Entry Header

- ⊙ Can be used CI14 crimp clip terminal
- ⊙ Insulator: High temperature plastic UL 94V-0, Color Nature
- ⊙ Insulator: Nylon 66 UL 94V-0, Color Nature
- ⊙ With locking latch provide secure mating

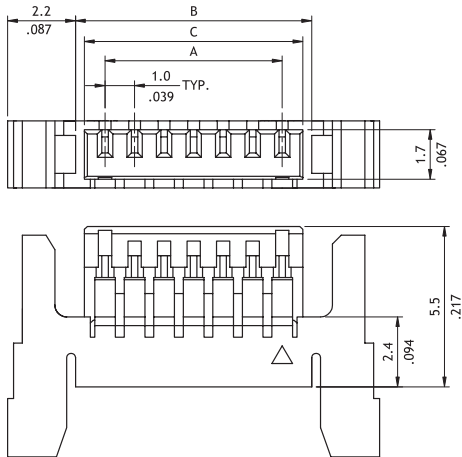

DIM.A = 1.0 x No. of Spaces
 DIM.B = DIM.A + 2.0
 DIM.C = DIM.A + 1.4

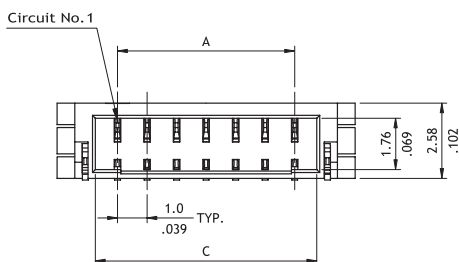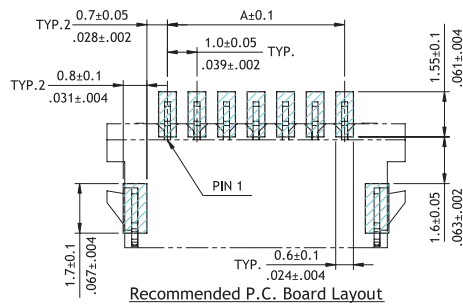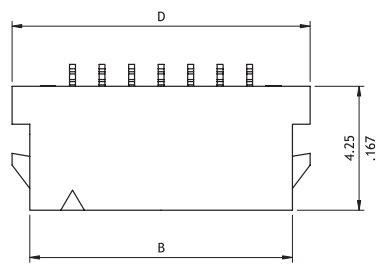

DIM.A = 1.00 x No. of Spaces
 DIM.B = DIM.A + 2.90
 DIM.C = DIM.A + 1.50
 DIM.D = DIM.A + 4.10

Ordering Code

① CI 14 ② 03 ③ S ④ L ⑤ 00C - ⑥ NH ① CI 14 ② 03 ③ M ④ 1 ⑤ H ⑥ R ⑦ I - ⑧ NH

- ① Series No.
- ② No. of Circuits: 03 to 20
- ③ S = Housing
- ④ L = With Locking Latch
- ⑤ Other Options: 00C = Latch Type 2
- ⑥ -NH = Halogen-Free


- ① Series No.
- ② No. of Circuits: 03 to 20 pin
- ③ M = SMT Type
- ④ Plating Code: 1 = Matte Tin over Nickel
- ⑤ Type: H = Side Entry
- ⑥ Packing Options: R = Tape & Reel
- ⑦ Other Options: I = Dual Latch Type
- ⑧ -NH = For Lead Free IR process and Halogen-Free

CI63 Series 1.20mm(.048") Wire to Board SMT Headers & Housing / Terminal

NEW


- Mate with CI63 Header
- Can be used CI63 crimp clip terminal
- Insulation: High temperature plastic UL 94V-0, Color Black

RoHS Compliant  

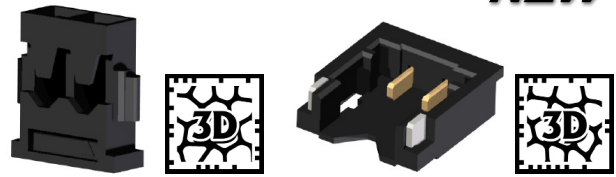


P/N CI63**S0000

A = 1.20 x NO. OF SPACES
B = A + 1.9
C = A + 1.4

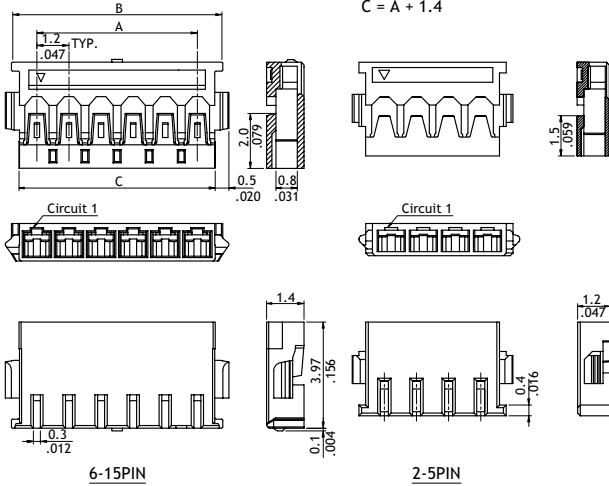


P/N CI63T012PPO

AWG #30-36

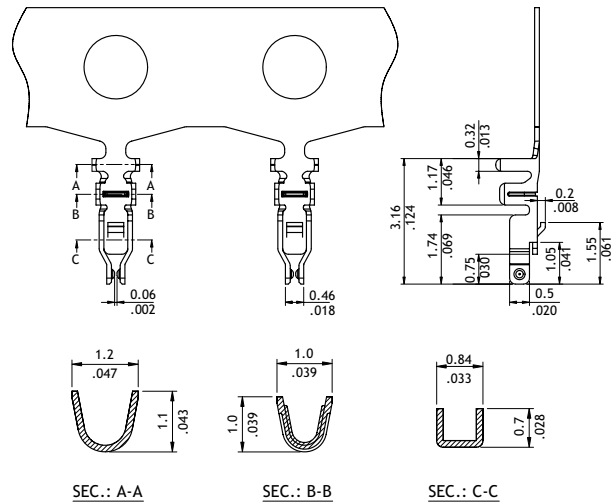

P/N CI63**M2HR0-NH

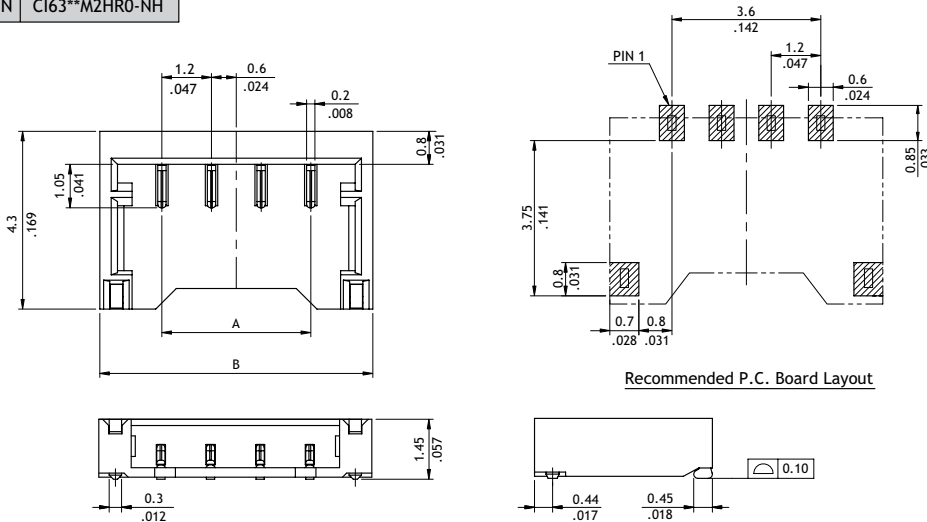

A = 1.20 x NO. OF SPACES
B = A + 3.0

Ordering Code

1 CI63 **2** 02 **3** S **4** 0000 **1** CI63 **2** 02 **3** M **4** 2 **5** H **6** R **7** 0 **8** - NH

- 1** Series No.
- 2** No. of Circuits: 02 to 07
- 3** S = Housing
- 4** Other Options: 0000 = Standard

- 1** Series No.
- 2** No. of Circuits: 02 to 10
- 3** Solder Type: M = SMT
- 4** Plating Code: 2 = Gold plated over Nickel
- 5** Type: H = Side Entry
- 6** Packing Options: 2 = Gold plated over Nickel
- 7** Other Option: 0 = Standard
- 8** -NH = For Lead Free IR process and Halogen-Free


CI

WIRE TO BOARD


CI42 Series 1.25mm(.049") Wire to Board Housing & Terminal & SMT Header

- ⊙ Locking slots provide secure mating
- ⊙ Fixed tabs PCB hold-down and strain-relief for SMT tails
- ⊙ Insulator: High temperature plastic UL 94V-0, Color Nature (Header)
- ⊙ Insulation: Glass filled polyester UL 94V-0, Color Nature (Housing)
- ⊙ With Gold flash plated SMT type contact


RoHS Compliant

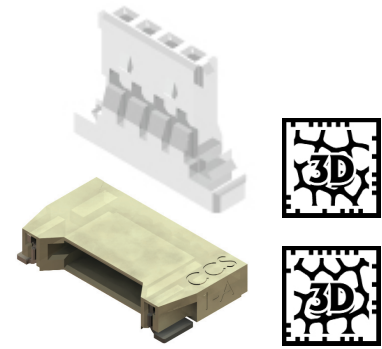



P/N CI42**SL000

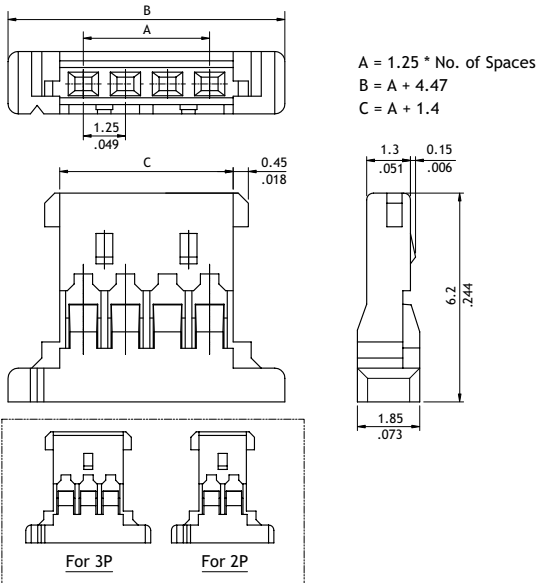

P/N CI42T011PP0

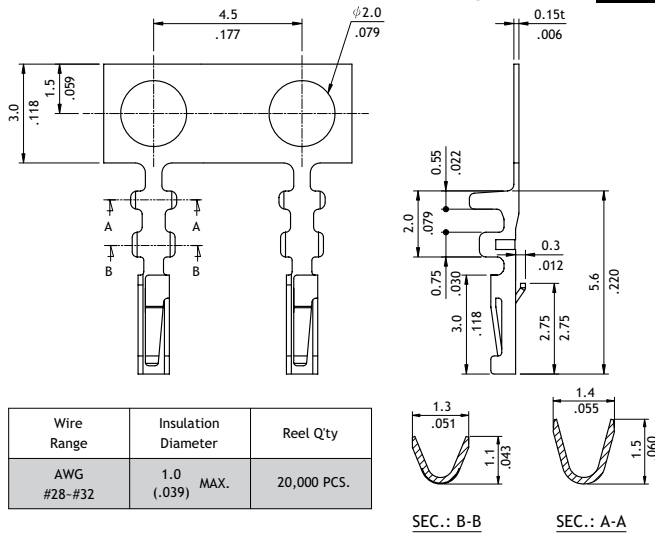

P/N CI42**M2HR*-NH

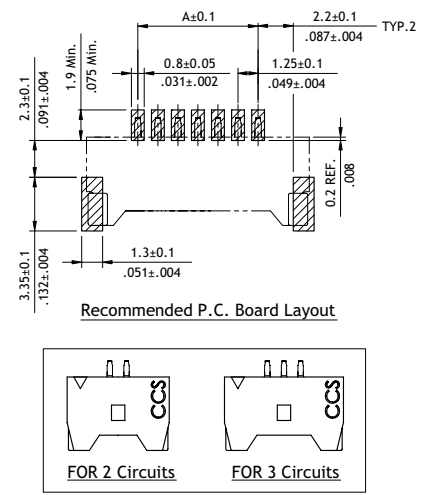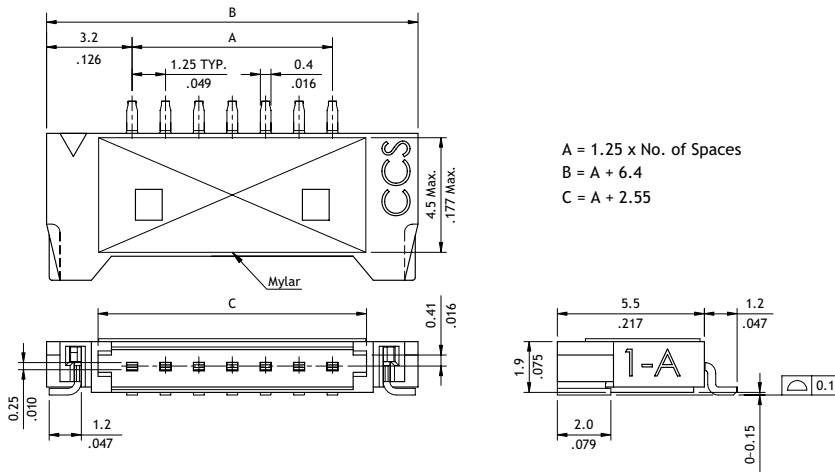

Ordering Code

1 2 3 4 5
CI42 10 SL 000


- ① Series No.
- ② No. of Circuits: 02 to 10
- ③ S = Housing
- ④ L = With Latch
- ⑤ Other Options: 000 = Standard

1 2 3 4 5 6 7 8
CI42 10 M2 HR P - NH


- ① Series No.
- ② No. of Circuits: 02 to 10
- ③ M = SMT Type
- ④ Plating Code: 2 = Gold flash over 50μ " Nickel
- ⑤ Type: H = Side Entry
- ⑥ Packing Options: R = Tape & Reel
- ⑦ Other Options: 0 = Without Mylar, P = With Mylar
- ⑧ -NH = For Lead Free IR process and Halogen-Free

CI43 Series 1.25mm(.049") Wire to Board Housing & Terminal & SMT Header


- ⊙ 2.03mm above the board
- ⊙ Copper alloy dual contacts
- ⊙ Insulation: High temperature plastic UL 94V-0, Color Black
- ⊙ With metal fixed tabs to secure connector in place

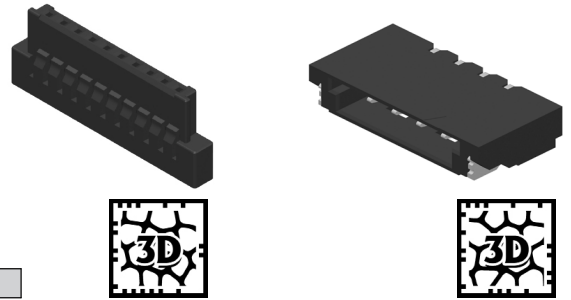


P/N CI43**S0000

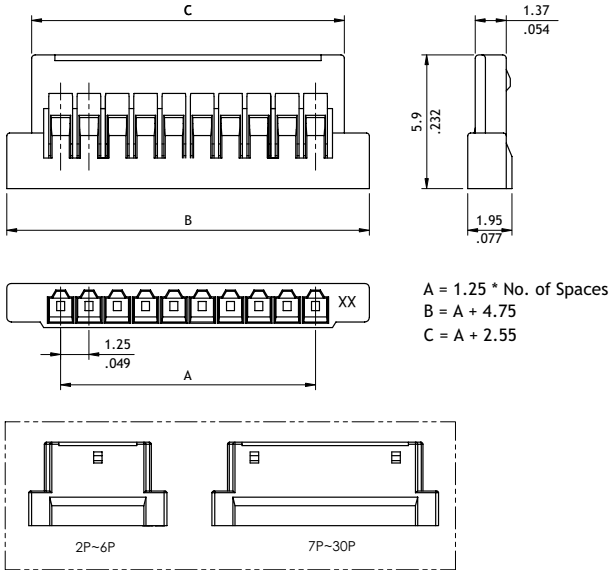

P/N CI43T011PE0

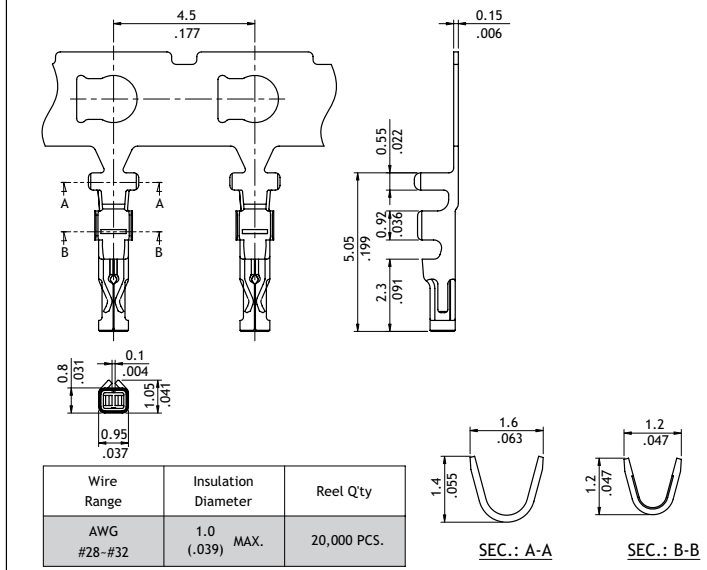

P/N CI43**M1HR0-NH

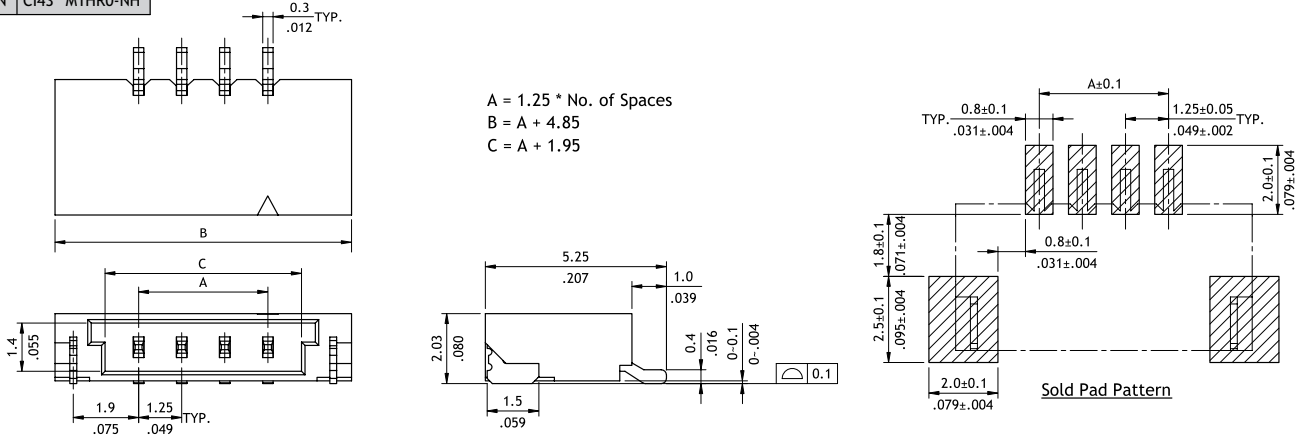

Ordering Code

1 **2** **3** **4**
CI43 30 S 0000


- ① Series No.
- ② No. of Circuits: 02 to 30
- ③ S = Housing
- ④ Other Options:
0000 = Standard

1 **2** **3** **4** **5** **6** **7** **8**
CI43 30 M 1 HR 0 - NH




- ① Series No.
- ② No. of Circuits: 02 to 30
- ③ M = SMT Type
- ④ Plating Code:
1 = Matte Tin plated over Nickel
2 = Gold flash over Nickel
- ⑤ Type: H = Side Entry
- ⑥ Packing Options: R = Tape & Reel
- ⑦ Other Options:
0 = Standard (2,3,7~30PIN)
B = Standard (4~6PIN)
- ⑧ -NH = For Lead Free soldering process and Halogen-Free

CI44 Series 1.25mm(.049") Wire to Board Connectors Housing & Terminal



- Latch housing secure terminal in housing and provides extra terminal retention
- Terminal accommodated AWG #28 ~ #32
- Insulator: Polyester UL 94V-0, Color Nature
- Terminal: Tin plated, Phosphor Bronze
- Mate with CI44 header

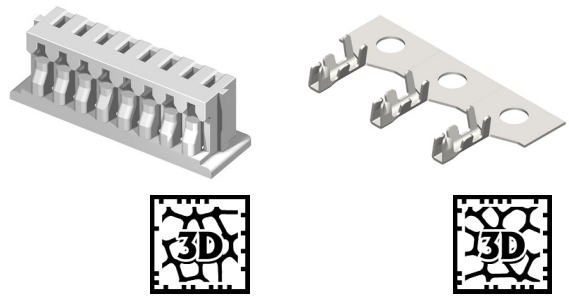



CI

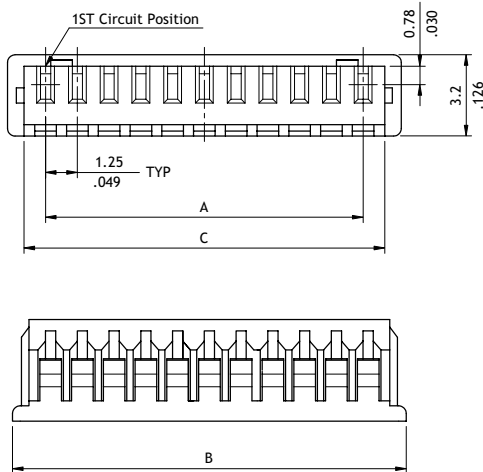

Circuits	Dimension		
	A	B	C
2	1.25(.049)	4.25(.167)	2.95(.116)
3	2.50(.098)	5.5(.217)	4.20(.165)
4	3.75(.148)	6.75(.266)	5.45(.215)
5	5.00(.197)	8.0(.315)	6.70(.264)
6	6.25(.246)	9.25(.364)	7.95(.313)
7	7.50(.295)	10.5(.413)	9.20(.362)
8	8.75(.344)	11.75(.463)	10.45(.411)
9	10.00(.394)	13.0(.512)	11.70(.461)
10	11.25(.443)	14.25(.561)	12.95(.510)
11	12.50(.492)	15.5(.610)	14.20(.559)
12	13.75(.541)	16.75(.659)	15.45(.608)
13	15.00(.591)	18.0(.709)	16.70(.657)
14	16.25(.640)	19.25(.758)	17.95(.707)
15	17.50(.689)	20.5(.807)	19.20(.756)

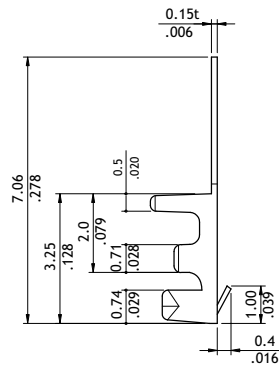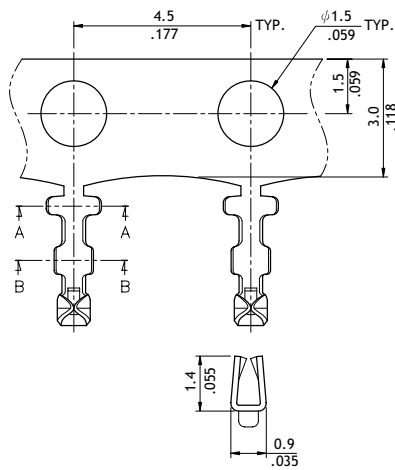

Wire Range	Insulation Diameter	Reel Qty
AWG #28-#32	1.0 (.039) MAX.	15,000 PCS.



Ordering Code

1 2 3 4 5 6
CI44 15 S00 0 0 - NH

- ① Series No.
- ② No. of Circuits: 02 to 15
- ③ S00 = Housing
- ④ Color: 0 = Color Nature
- ⑤ Other Options: 0 = Standard
- ⑥ -NH = Halogen-Free

1 2 3 4 5 6
CI44 T01 1 P P 0


- ① Series No.
- ② Type: T01 = AWG #28 ~ #32
- ③ Plating Code: 1 = Tin over Nickel
- ④ Material: P = Phosphor Bronze
- ⑤ Plating Method: P = Post plating
- ⑥ Other Options: 0 = Standard

WIRE TO BOARD



CI44 Series 1.25mm(.049") Wire to Board Connectors DIP Headers

- ⊙ Polarization and Low-profile
- ⊙ Locking slots provide secure mating
- ⊙ Mate with CI44 housing
- ⊙ Insulator: High temperature plastic UL 94V-0, Color Nature
- ⊙ With Tin plated DIP type contact

RoHS Compliant   

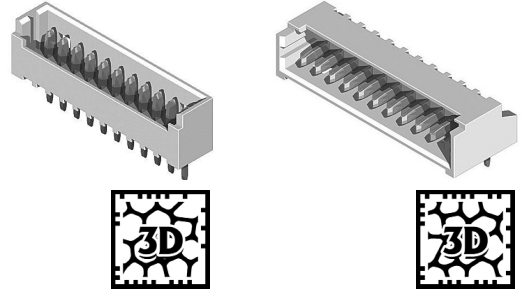


Straight

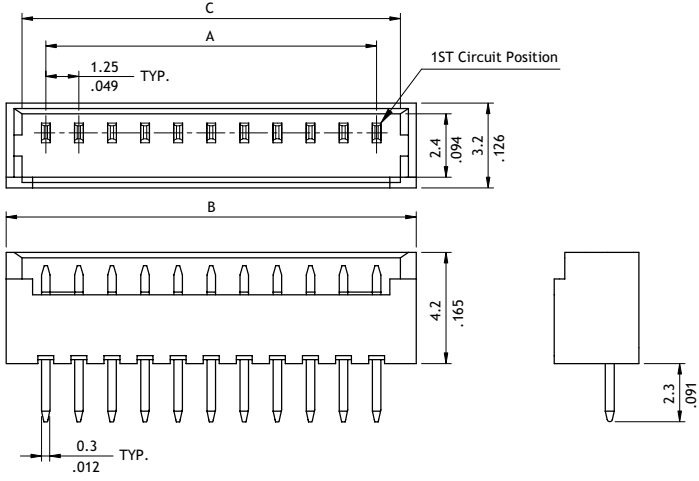

Recommended P.C. Board Layout

Right Angle

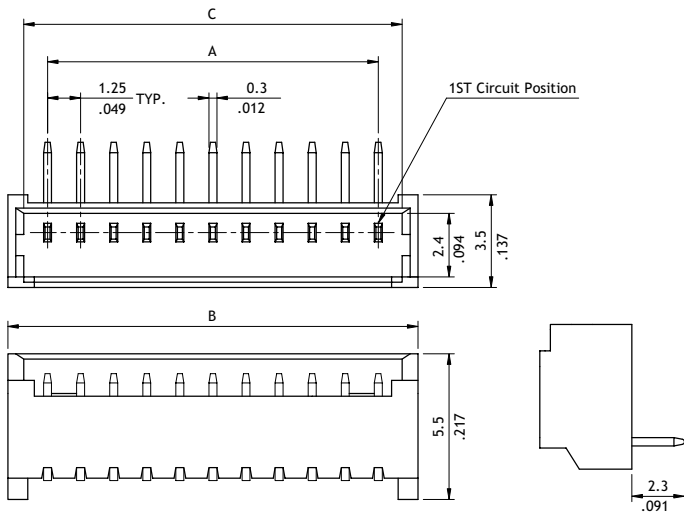

Circuits	Dimension		
	A	B	C
2	1.25(.049)	4.35(.171)	3.15(.124)
3	2.50(.098)	5.6(.220)	4.40(.173)
4	3.75(.148)	6.85(.270)	5.65(.222)
5	5.00(.197)	8.1(.319)	6.90(.272)
6	6.25(.246)	9.35(.368)	8.15(.321)
7	7.50(.295)	10.6(.417)	9.40(.370)
8	8.75(.344)	11.85(.467)	10.65(.419)
9	10.00(.394)	13.1(.516)	11.90(.469)
10	11.25(.443)	14.35(.565)	13.15(.518)
11	12.50(.492)	15.6(.614)	14.40(.567)
12	13.75(.541)	16.85(.663)	15.65(.616)
13	15.00(.591)	18.1(.713)	16.90(.665)
14	16.25(.640)	19.35(.762)	18.15(.715)
15	17.50(.689)	20.6(.811)	19.40(.764)


Ordering Code

① CI 44 ② 1 5 ③ P ④ 1 ⑤ V ⑥ 0 0 - ⑦ NH




- ① Series No.
- ② No. of Circuits: 02 to 15
- ③ P = DIP Type
- ④ Plating Code:
1 = Matte Tin over Nickel
- ⑤ Type: V = Straight
H = Right Angle
- ⑥ Other Options:
00 = Standard
- ⑦ -NH = For Lead Free soldering process and Halogen-Free

CI44 Series 1.25mm(.049") Wire to Board Connectors SMT Headers




- ⊙ Polarization and Low-profile
- ⊙ Locking slots provide secure mating
- ⊙ Fixed tabs provide PCB hold-down and strain-relief for SMT
- ⊙ Mate with CI44 Housing
- ⊙ Insulator: High temperature plastic UL 94V-0, Color Nature
- ⊙ With Tin plated SMT type contact

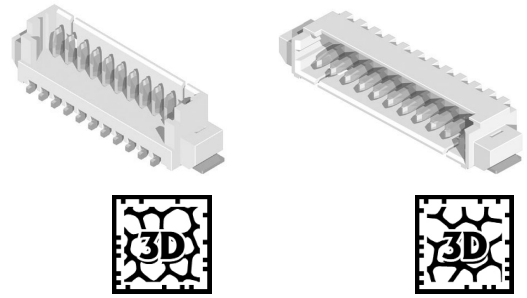

Top Entry

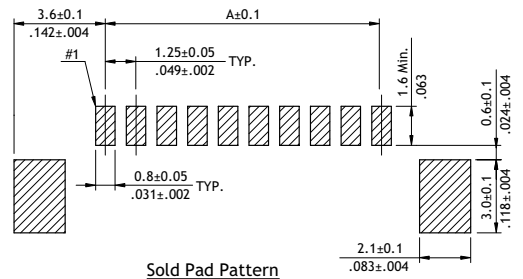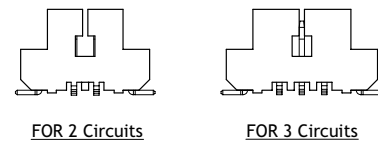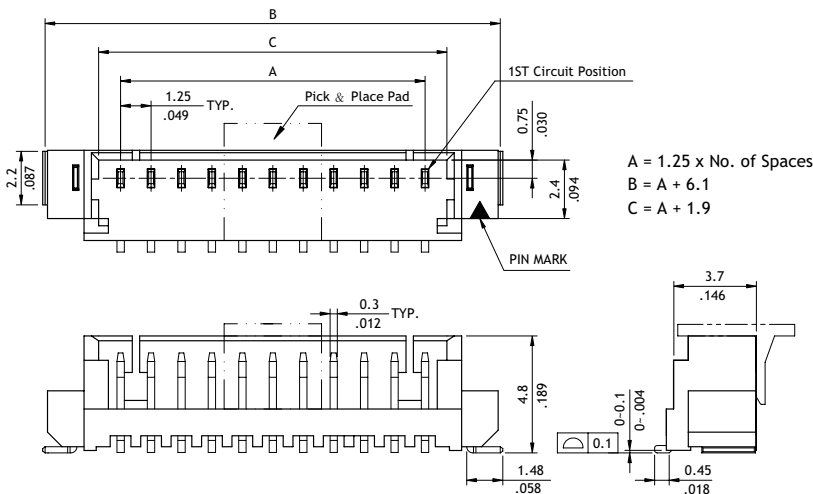

Side Entry

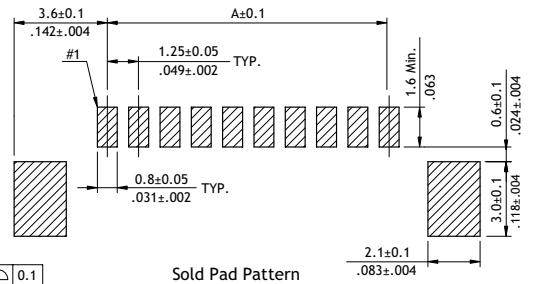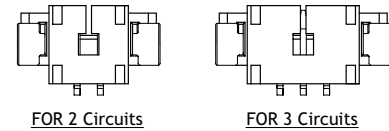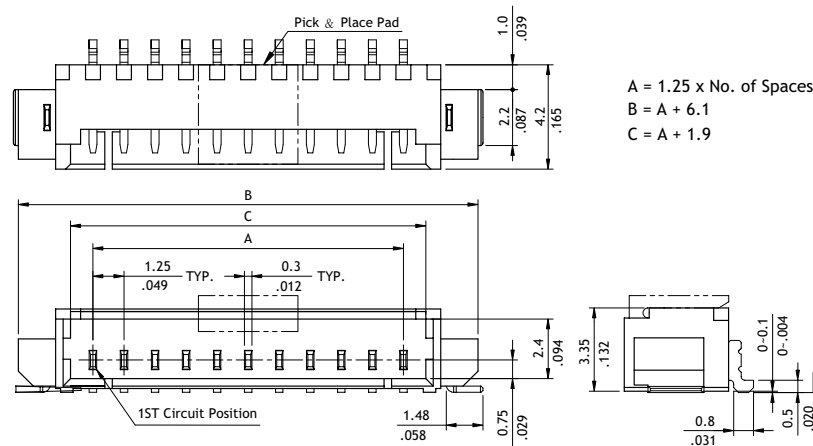

Ordering Code





1 CI **4** **4** **2** **1** **5** **3** **M** **4** **1** **5** **6** **R** **0** - **7** **NH**

- 1** Series No.
- 2** No. of Circuits: 02 to 15
- 3** M = SMT Type
- 4** Plating Code:
1 = Matte Tin over Nickel plated
- 5** Type: V = Top Entry
H = Side Entry
- 6** Other Options:
00 = Standard (Tube packing)
R0 = Tape & Reel (Without Pick & Place Pad)
RP = Tape & Reel (With Pick & Place Pad)
- 7** -NH = For Lead Free soldering process and Halogen-Free
*Special options consult manufacturer



CI45 Series 1.25mm(.049") Wire to Board Housing & SMT Headers

- With locking latch provide secure mating
- Mate with CI45 Header
- Mate with CI14 crimp clip terminal (P/N: CI14T011PE0)

RoHS Compliant

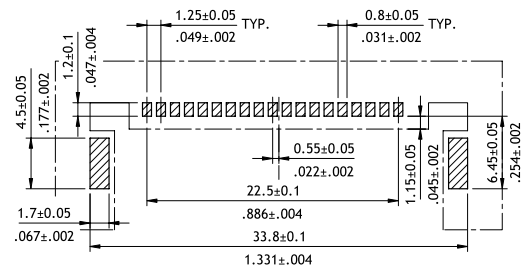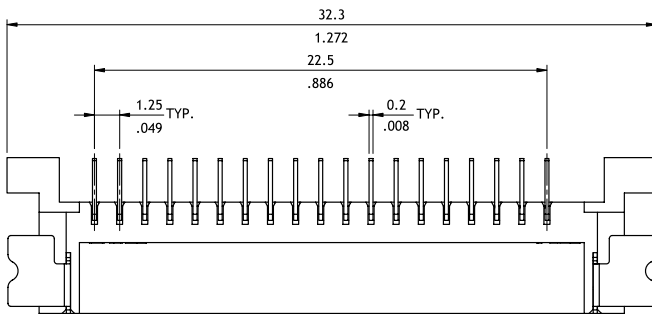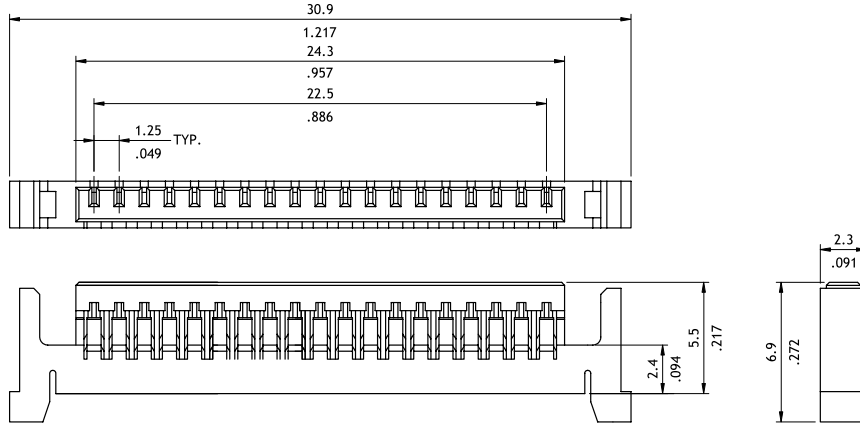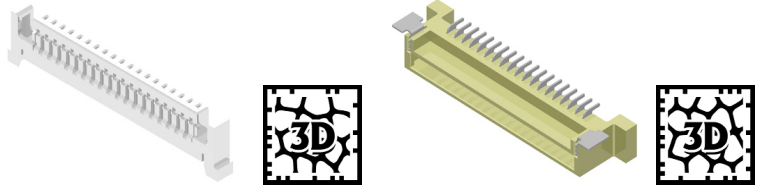

Recommended P.C. Board Layout

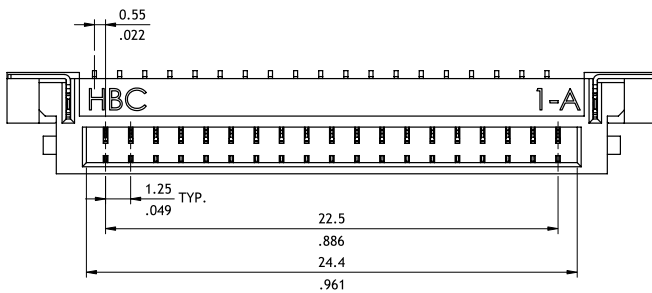

Ordering Code

① CI ② 45 ③ 19 ④ S ⑤ L ⑥ 000 - NH

- ① Series No.
- ② No. of Circuits: 19
- ③ S = Housing
- ④ L = With Locking Latch
- ⑤ Other Options:
000 = Standard
- ⑥ -NH = Halogen-Free





① CI ② 45 ③ 19 ④ M ⑤ 1 ⑥ H ⑦ R0 - NH

- ① Series No.
- ② No. of Circuits: 19
- ③ M = SMT Type
- ④ Plating Code: 1 = Matte Tin over Nickel
- ⑤ Type: H = Side Entry
- ⑥ Packing Options: R0 = Tape & Reel
- ⑦ -NH = For Lead Free IR Process and Halogen-Free



CI46 Series 1.25mm(.049") Wire to Board Connectors Housing & Terminal

- With locking latch provide secure mating
- Mate with CI46 Header
- Can be used CI46 Crimp Clip Terminal
- Insulator: Nylon 66 UL 94V-0, Color Nature



RoHS Compliant (HF)

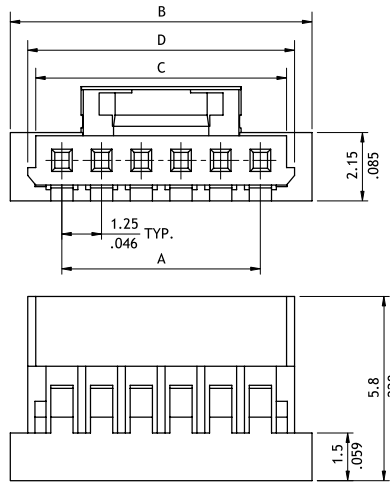

A = 1.25 x No. of Spaces
 B = A + 3.25
 C = A + 1.65
 D = A + 2.15

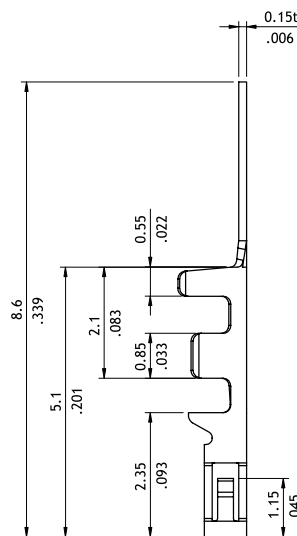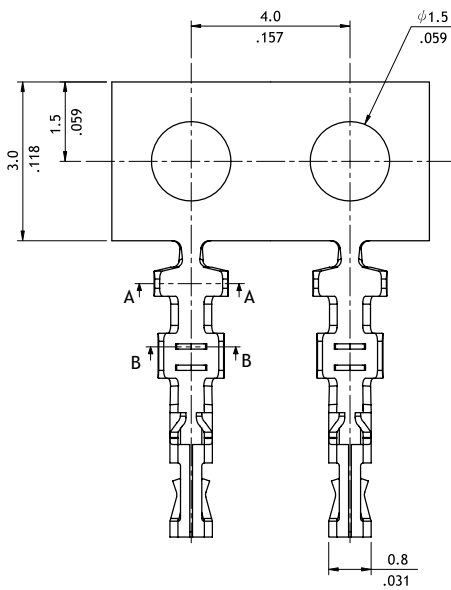

Wire Range	Insulation Diameter	Reel Qty
AWG #26-#32	0.90 (.035) MAX.	16,000 PCS



Ordering Code

1 CI46 **2** 20 **3** S **4** L **5** 000


- ① Series No.
- ② No. of Circuits: 02 to 20
- ③ S = Housing
- ④ L = With Locking Latch
- ⑤ Other Options: 000 = Standard

1 CI46 **2** T01 **3** 1 **4** P **5** E **6** 0

- ① Series No.
- ② Type: T01 = AWG #26 ~ #32
- ③ Plating Code: 1 = Tin over Nickel
- ④ Material: P = Phosphor Bronze
- ⑤ Plating Method: E = Pre-tinned
- ⑥ Other Options: 0 = Standard



CI46 Series 1.25mm(.049") Wire to Board Connectors SMT Headers

- With locks provide secure mating
- Fixed tabs provide PCB hold-down
- Mate with CI46 Housing
- Insulator: High temperature plastic UL 94V-0, Color Nature




RoHS Compliant

Top Entry

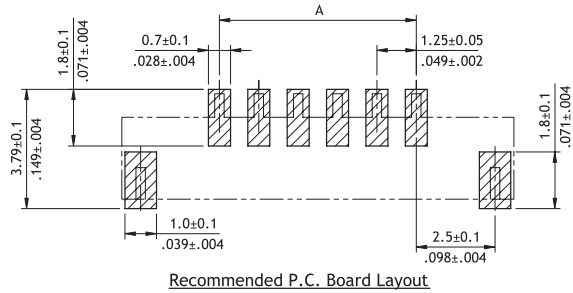
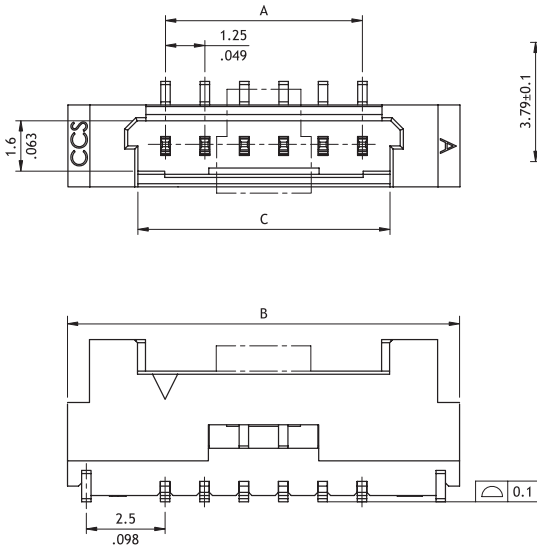


Recommended P.C. Board Layout




DIM. A = 1.25 x No. of Spaces
 DIM. B = DIM. A + 6.2
 DIM. C = DIM. A + 1.75

Side Entry

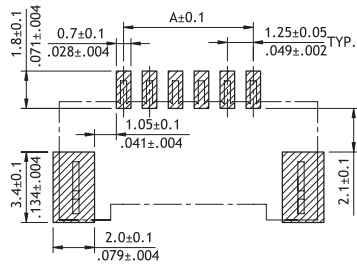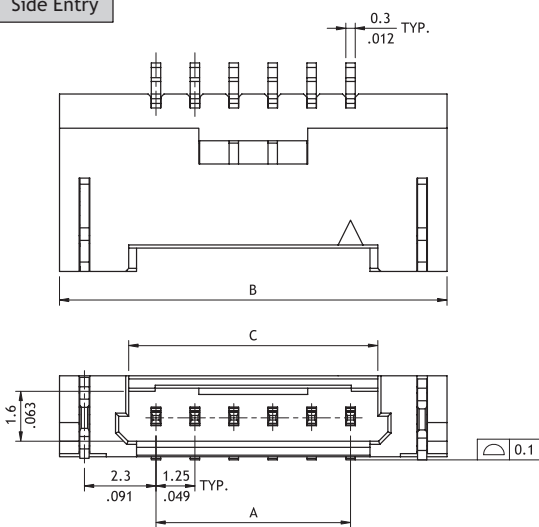

Recommended P.C. Board Layout

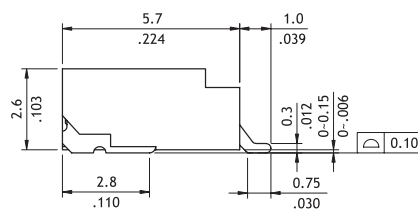

A = 1.25 x No. of Spaces
 B = A + 6.2
 C = A + 1.75

Ordering Code

1 **2** **3** **4** **5** **6** **7** **8**
CI 46 20 M 1 V R 0 - NH

- 1** Series No.
- 2** No. of Circuits: 02 to 20
- 3** M = SMT Type
- 4** Plating Code:
1 = Matte Tin plated over Nickel
- 5** Type: V = Top Entry
H = Side Entry



- 6** Packing Options:
R = Tape & Reel
- 7** Other Options:
0 = Standard
- 8** -NH = For Lead Free soldering process and Halogen-Free

CI


WIRE TO BOARD

CI15 Series 1.50mm(.059") Wire to Board Connectors Housing & Terminal


- Terminal accommodated AWG #26 ~ #32
- Insulator: Nylon 66 UL 94V-0, Color Nature
- Terminal: Tin plated, Phosphor Bronze
- Mate with CI15 Header

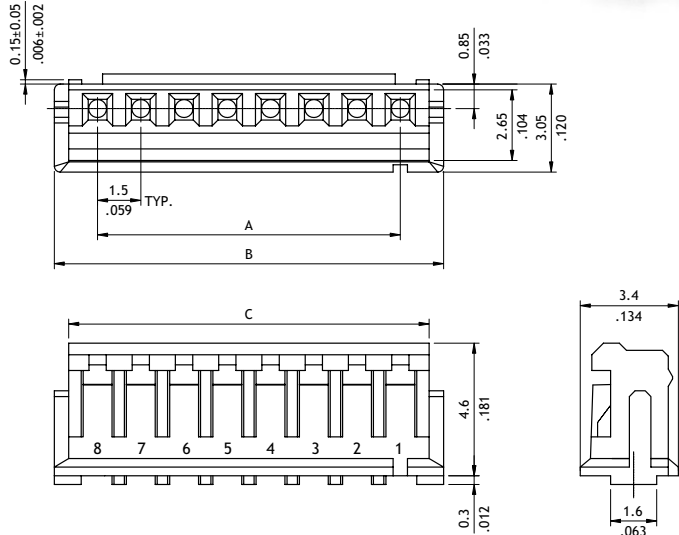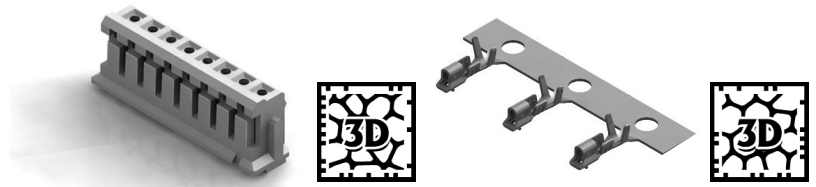

Circuits	Dimension		
	A	B	C
2	1.5(.059)	4.5(.177)	3.5(.138)
3	3.0(.118)	6.0(.236)	5.0(.197)
4	4.5(.177)	7.5(.295)	6.5(.256)
5	6.0(.236)	9.0(.354)	8.0(.315)
6	7.5(.295)	10.5(.413)	9.5(.374)
7	9.0(.354)	12.0(.472)	11.0(.433)
8	10.5(.413)	13.5(.513)	12.5(.492)
9	12.0(.472)	15.0(.591)	14.0(.551)
10	13.5(.531)	16.5(.650)	15.5(.610)
11	15.0(.591)	18.0(.709)	17.0(.669)
12	16.5(.650)	19.5(.768)	18.5(.728)
13	18.0(.709)	21.0(.872)	20.0(.787)
14	19.5(.768)	22.5(.886)	22.5(.886)
15	21.0(.827)	24.0(.945)	24.0(.945)

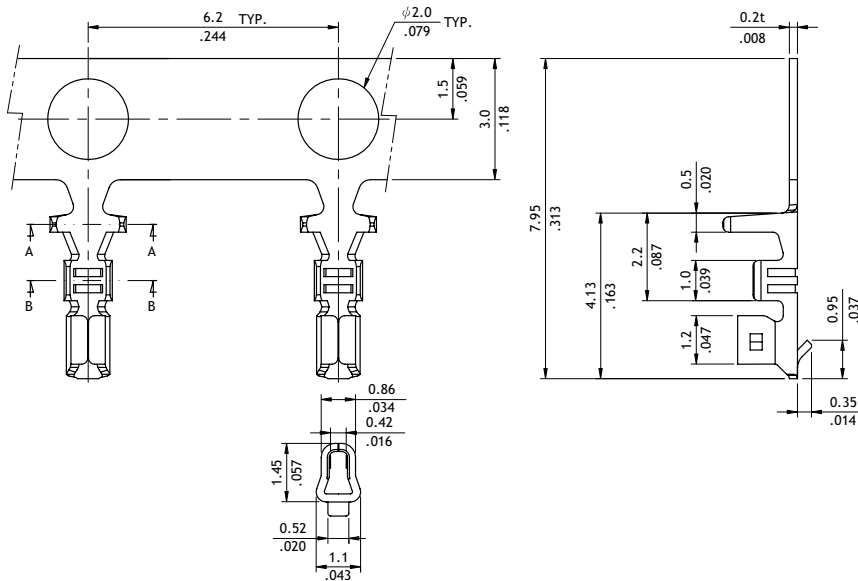

Wire Range	Insulation Diameter	Reel Qty
AWG #26-#32	1.35 (.053) MAX.	10,000 PCS



Ordering Code

1 CI15 **2** 15 **3** S **4** 0000


- ① Series No.
- ② No. of Circuits: 02 to 15
- ③ S = Housing
- ④ Other Options:
0000 = Standard

1 CI15 **2** T01 **3** 1 **4** P **5** E **6** 0


- ① Series No.
- ② Type: T01 = AWG #26 ~ #32
- ③ Plating Code: 1 = Tin over Nickel
- ④ Material: P = Phosphor Bronze
- ⑤ Plating Method: E = Pre-tinned
- ⑥ Other Options: 0 = Standard

CI15 Series 1.50mm(.059") Wire to Board Connectors DIP Headers

- Polarization and Low-profile
- Locking slots provide secure mating
- Insulator: High temperature plastic UL 94V-0, Color Nature
- With Tin plated DIP type contact
- Mate with CI15 Housing


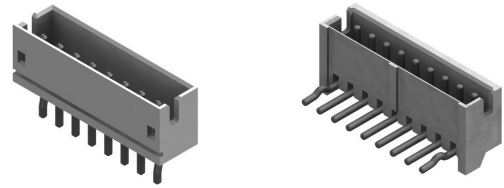


Straight

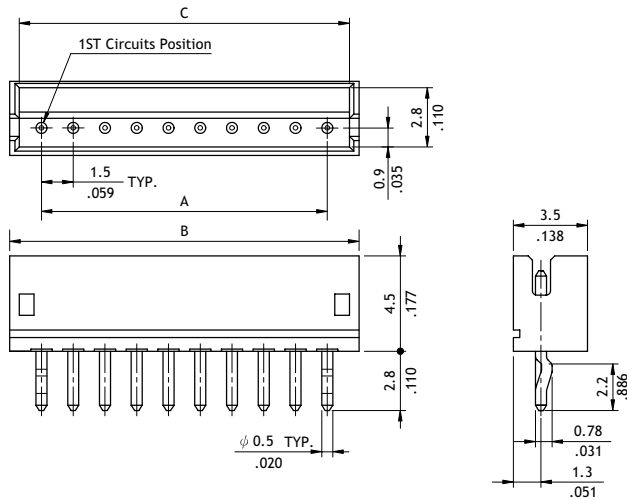

Circuits	Dimension		
	A	B	C
2	1.5(.059)	4.5(.177)	3.6(.142)
3	3.0(.118)	6.0(.236)	5.1(.201)
4	4.5(.177)	7.5(.295)	6.6(.260)
5	6.0(.236)	9.0(.354)	8.1(.319)
6	7.5(.295)	10.5(.413)	9.6(.378)
7	9.0(.354)	12.0(.472)	11.1(.437)
8	10.5(.413)	13.5(.531)	12.6(.496)
9	12.0(.472)	15.0(.591)	14.1(.555)
10	13.5(.531)	16.5(.650)	15.6(.614)
11	15.0(.591)	18.0(.709)	17.1(.673)
12	16.5(.650)	19.5(.768)	18.6(.732)
13	18.0(.709)	21.0(.827)	20.1(.791)
14	19.5(.768)	22.5(.886)	21.6(.850)
15	21.0(.827)	24.0(.945)	23.1(.909)

Right Angle

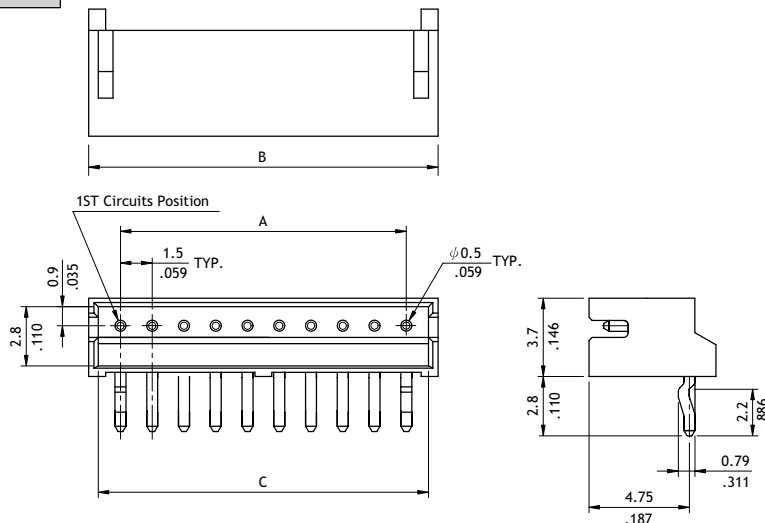

Recommended P.C. Board Layout


Ordering Code

① CI 15 ② 15 ③ P ④ 1 ⑤ V ⑥ K ⑦ 0 - ⑧ NH


- ① Series No.
- ② No. of Circuits: 02 to 15
- ③ P = DIP Type
- ④ Plating Code: 1 = Matte Tin over Nickel
- ⑤ Type: V = Straight
H = Right Angle
- ⑥ K = With Pin Kinked
- ⑦ Other Options: 0 = Standard
*Special options consult manufacturer
- ⑧ -NH = For Lead Free soldering process and Halogen-Free

CI15 Series 1.50mm(.059") Wire to Board Connectors SMT Headers


- Polarization and Low-profile
- Locking slots provide secure mating
- Fixed tabs provide PCB hold-down and strain-relief for SMT tails
- Insulator: High temperature plastic UL 94V-0, Color Nature
- With Tin plated SMT type contact
- Mate with CI15 Housing

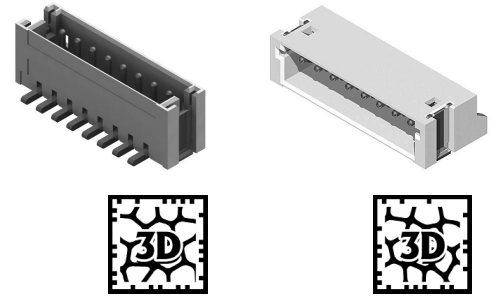

Top Entry

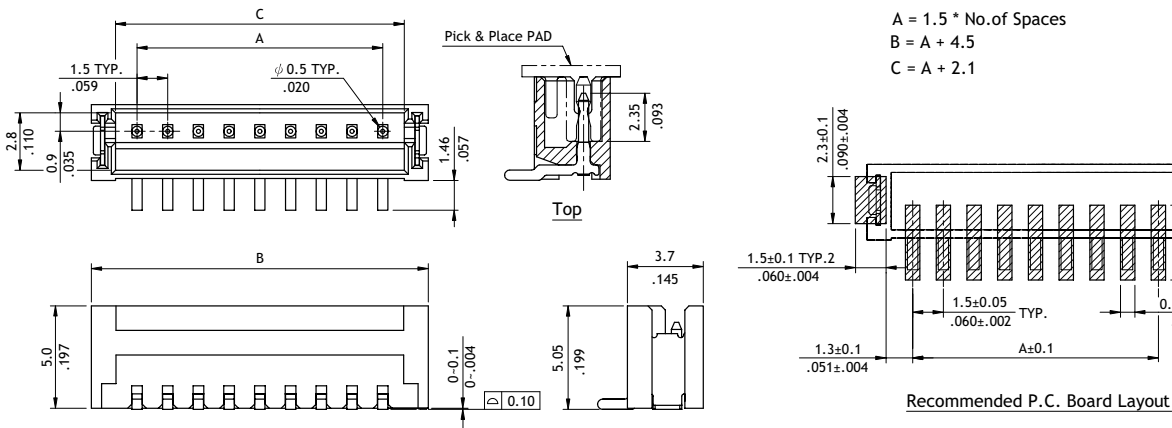

Side Entry

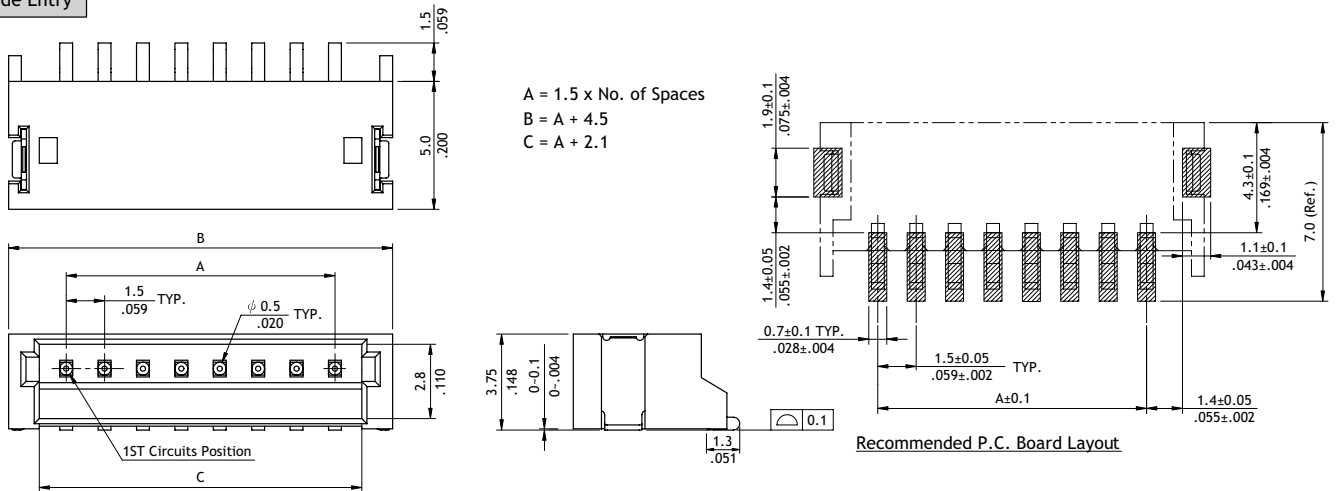




Ordering Code

1 **2** **3** **4** **5** **6** **7** **8**
CI 15 1 5 M 1 V R 0 - NH

- 1** Series No.
- 2** No. of Circuits: 02 to 15
- 3** M = SMT Type
- 4** Plating Code: 1 = Matte Tin over Nickel
- 5** Type: V = Top Entry
H = Side Entry
- 6** Packing Options:
R = Tape & Reel
T = Tube
- 7** Other Options: 0 = Standard
*Special options consult manufacturer
- 8** -NH = For Lead Free soldering process and Halogen-Free

CI15 Series 1.50mm(.059") Wire to Board Latch Type Housing & SMT Header

- Fixed tabs provide PCB hold-down
- Insulator: High temperature UL 94V-0, Color Nature
- Housing: Nylon 66 UL 94V-0, Color Nature
- Housing mate with CI15 Terminal (P/N: CI15T011PE0)

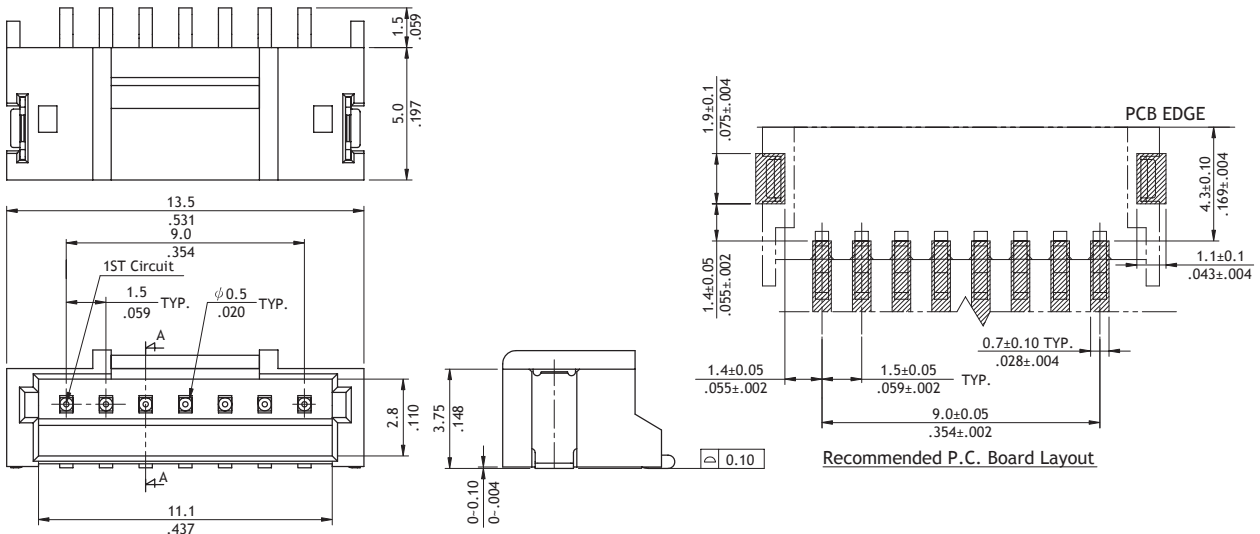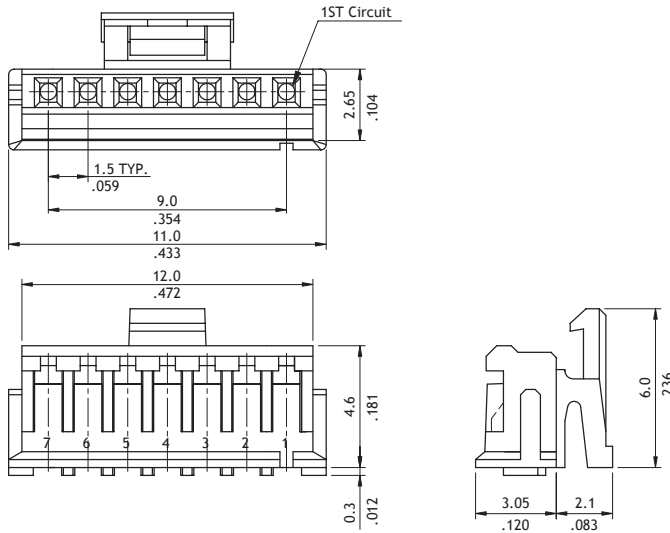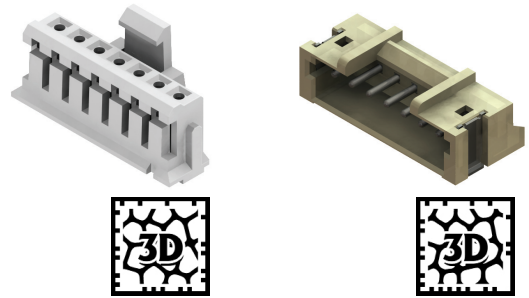

Ordering Code

1 **2** **3** **4**
CI15 07 S L000



- ① Series No.
- ② No. of Circuits: 07
- ③ S = Housing
- ④ L = Latch Type
- ⑤ Other Options:
0000 = Standard

1 **2** **3** **4** **5** **6** **7** **8**
CI15 07 M 1 H T L - NH




- ① Series No.
- ② No. of Circuits: 07
- ③ M = SMT Type
- ④ Plating Code: 1 = Matte Tin plated over Nickel
- ⑤ Type: H = Right Angle
- ⑥ Packing Options: T = Tube (Standard)
R = Tape & Reel
- ⑦ L = Latch Type
- ⑧ -NH = For Lead Free IR Process and Halogen-Free

CI19 Series 1.50mm(.059") Wire to Board Connectors Housing & Terminal


- Mate with CI19 Header
- Can be used CI19 Crimp Clip Terminal
- Insulator: High temperature plastic UL 94V-0, Color Nature

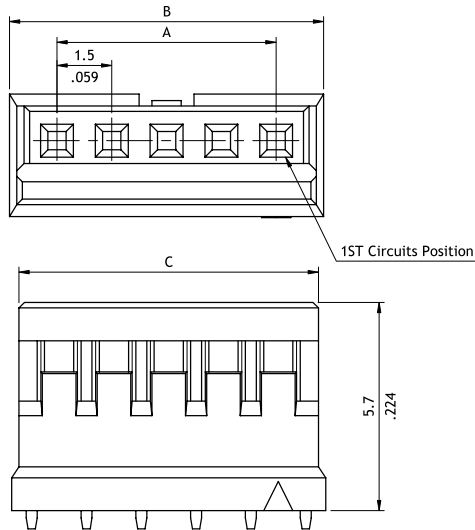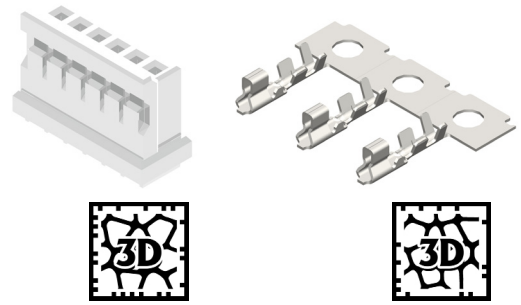

A = 1.5 * No. of Spaces
 B = A + 2.6
 C = A + 2.2

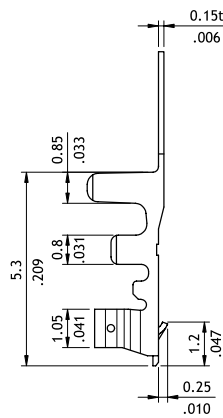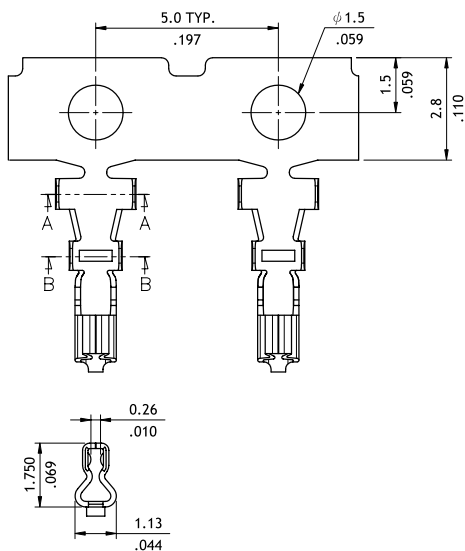

Wire Range	Insulation Diameter	Reel Qty
AWG #24-#30	1.1 (.043) MAX.	10,000 PCS.

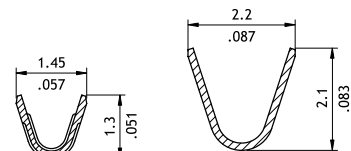

Ordering Code

1 CI19 **2** 15 **3** S **4** L **5** 000 - **6** NH

- 1** Series No.
- 2** No. of Circuits: 02 to 15
(Available: 02 to 05, 08)
- 3** S = Housing
- 4** L = With Ramp
- 5** Other Options: 000 = Standard
- 6** -NH = Halogen-Free

1 CI19 **2** T01 **3** 1 **4** P **5** E0

- 1** Series No.
- 2** Type: T01 = AWG #26 ~ #32
- 3** Plating Code: 1 = Tin over Nickel
- 4** Material: P = Phosphor Bronze
- 5** Other Option: E0 = Standard


CI19 Series 1.50mm(.059") Wire to Board Connectors SMT Headers

- ⊙ Insulator: High temperature plastic UL 94V-0, Color Black
- ⊙ With metal fixed tabs to secure connector in place




CI

Top Entry

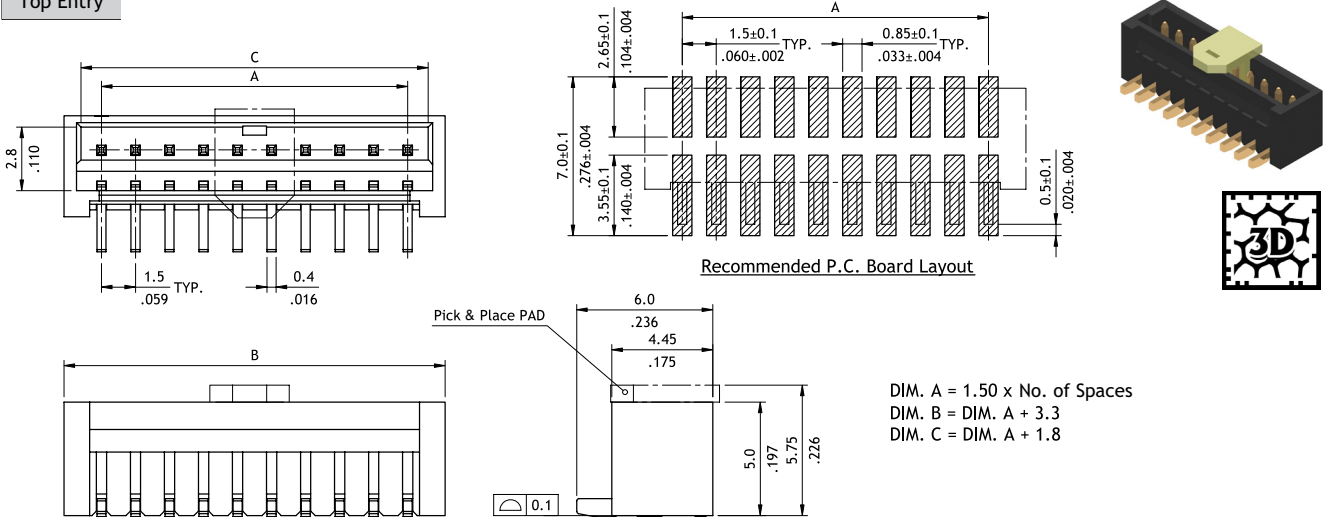

Side Entry

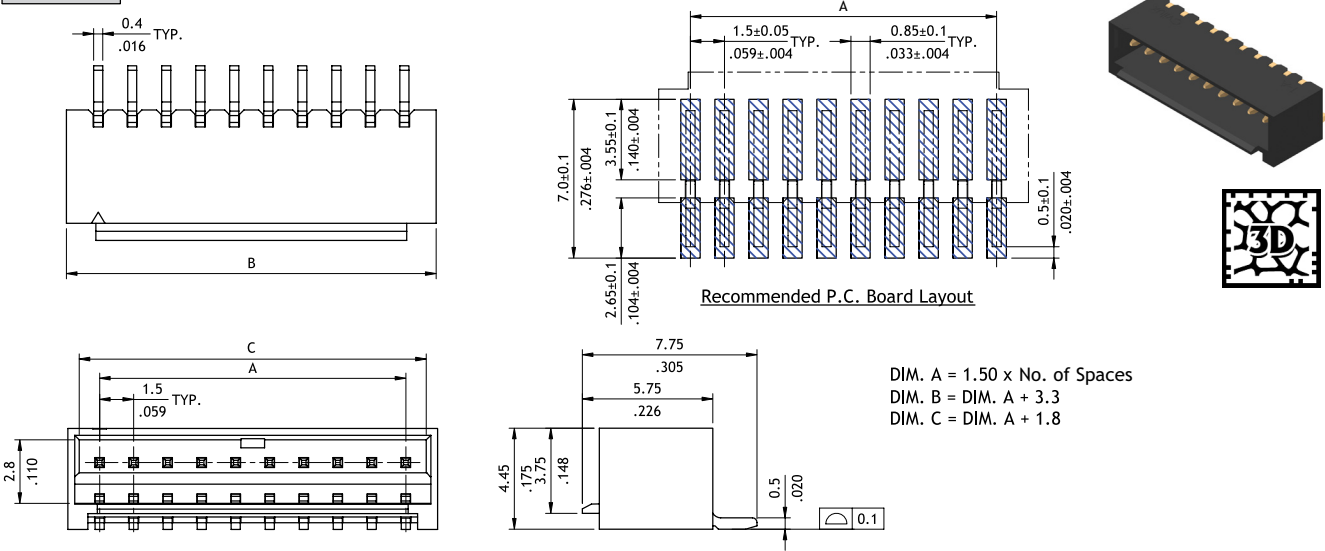

Ordering Code

① CI 19 ② 20 ③ M ④ 1 ⑤ H ⑥ R0 - ⑦ NH


- ① Series No.
- ② No. of Circuits: 02 to 20
- ③ M = SMT Type
- ④ Plating Code:
 1 = Matte Tin over Nickel
 2 = Gold flash over Nickel
- ⑤ Type: V = Top Entry
 H = Side Entry
- ⑥ Packing Options:
 R0 = Tape & Reel
- ⑦ -NH = For Lead Free IR Process and Halogen-Free

WIRE TO BOARD


CI87 Series 1.50mm(.059") Wire to Board Housing & Terminal & SMT Header

- ⊙ Locking slots provide secure mating
- ⊙ Fixed tabs provide PCB hold-down and strain-relief for SMT tails
- ⊙ Insulator: High temperature plastic UL 94V-0, Color Black (Header)
- ⊙ Insulation: Polyamide UL 94V-0, Color Nature (Housing)


RoHS Compliant

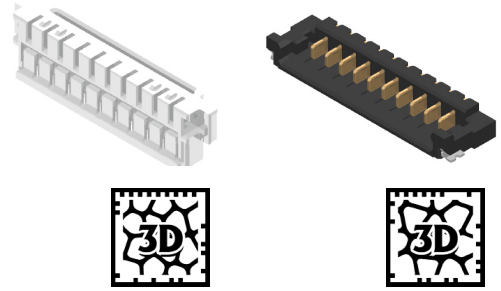


P/N CI8710S0000

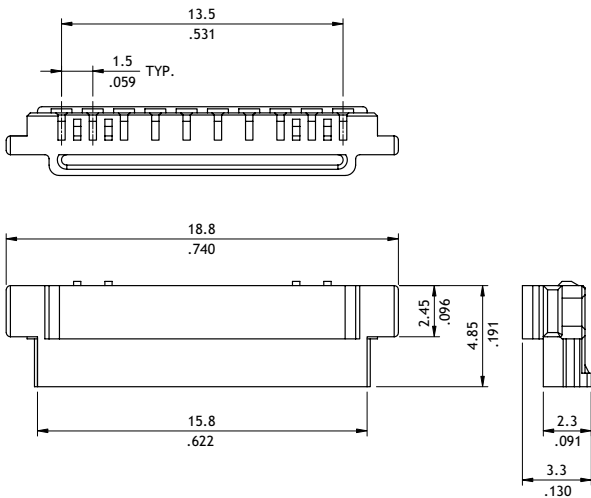

P/N CI87T012PP0

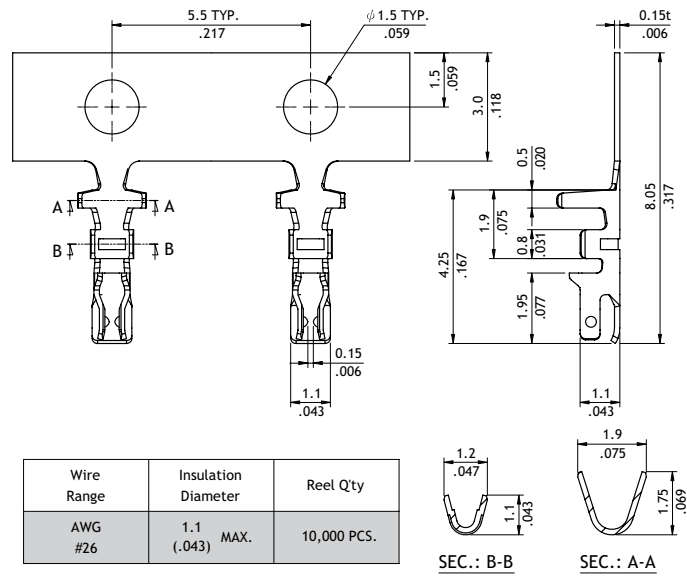

P/N CI8710M2VR0-NH

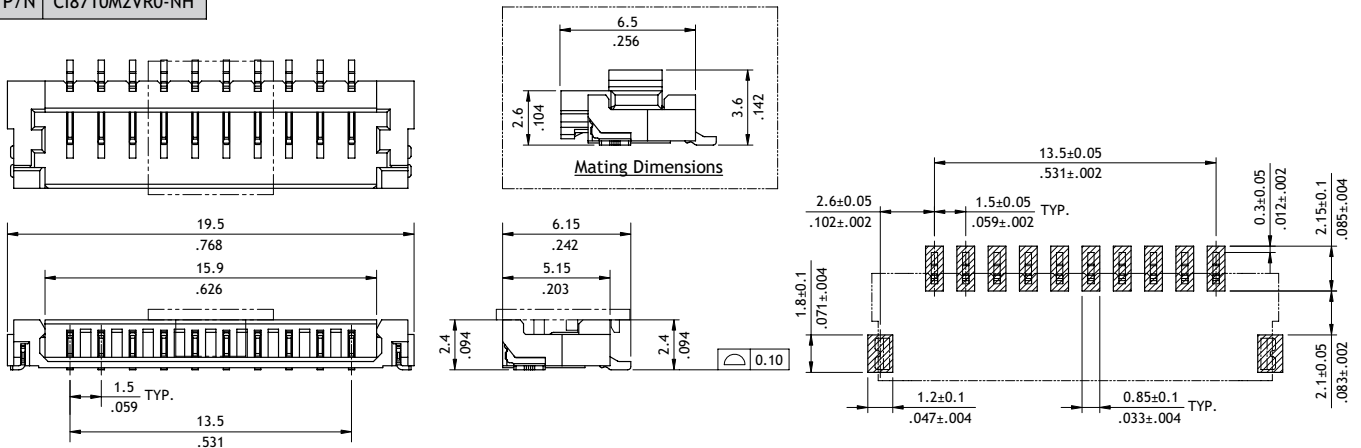

Ordering Code

1 **2** **3** **4**
CI87 10 S 0000


- 1** Series No.
- 2** No. of Circuits: 10
- 3** S = Housing
- 4** Other Options: 0000 = Standard

1 **2** **3** **4** **5** **6** **7** **8**
CI87 10 M 2 VR 0 - NH


- 1** Series No.
- 2** No. of Circuits: 10
- 3** M = SMT Type
- 4** Plating Code:
2 = Gold plated over Nickel
- 5** Type: V = Top Entry
- 6** Packing Options:
R = Tape & Reel
- 7** Other Options: 0 = Standard
- 8** -NH = For Lead Free IR process and Halogen-Free

CI07 Series 1.80mm(.071") Wire to Board Connectors Housing & Terminal


- Mate with CI07 Header
- Can be used CI07 Crimp Clip Terminal
- Insulator: Polyamide UL 94V-0, Color Nature




P/N CI07**S0000

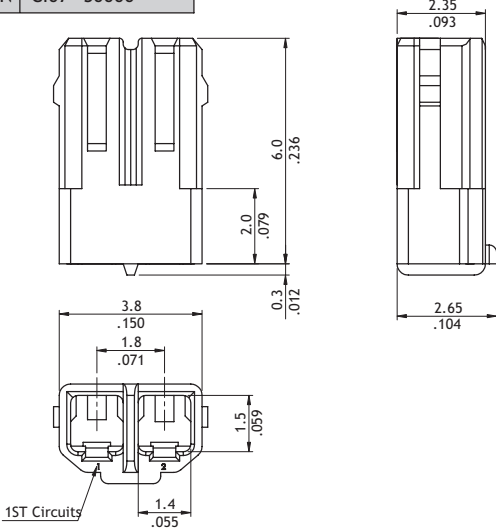


P/N CI07**SL000-NH

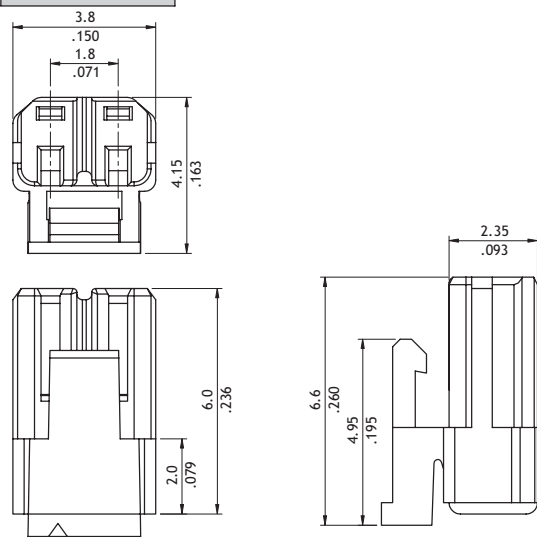

P/N CI07T021PE0

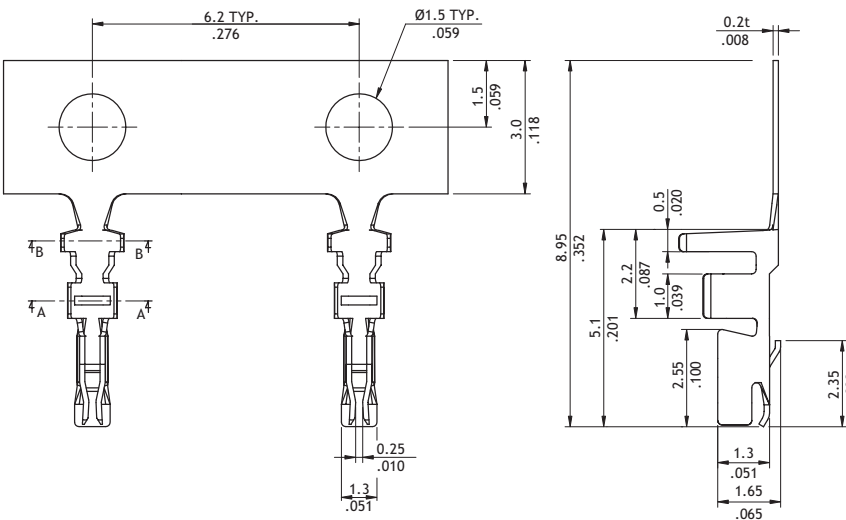

Wire Range	Insulation Diameter	Reel Qty
AWG #22-#26	0.95-1.3(mm) (.037-.051)	10,000 PCS
AWG #28-#30	0.88-0.95(mm) (.035-.037)	10,000 PCS

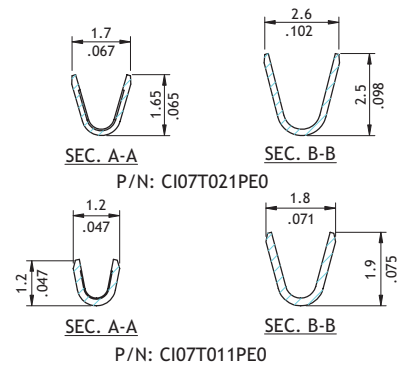

Ordering Code

1 CI07 **2** 02 **3** S **4** 0000



- ① Series No.
- ② No. of Circuits: 02
- ③ S = Housing
- ④ Other Options:
0000 = Without Locking Latch
L000-NH = With Locking Latch

1 CI07 **2** T02 **3** 1 **4** P **5** E **6** 0



- ① Series No.
- ② Type: T01 = AWG #28 ~ #30
T02 = AWG #22 ~ #26
- ③ Plating Code: 1 = Tin Plated
- ④ Material: P = Phosphor Bronze
- ⑤ Plating Method: E = Pre-tinned
- ⑥ Other Options: 0 = Standard

CI07 Series 1.80mm(.071") Wire to Board Connectors SMT Headers

- ⊙ Fixed tabs provide PCB hold-down
- ⊙ Mate with CI07 Housing
- ⊙ Insulator: High temperature plastic UL 94V-0, Color Nature

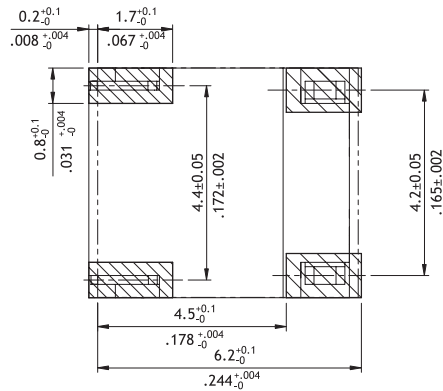

Recommended P.C. Board Layout

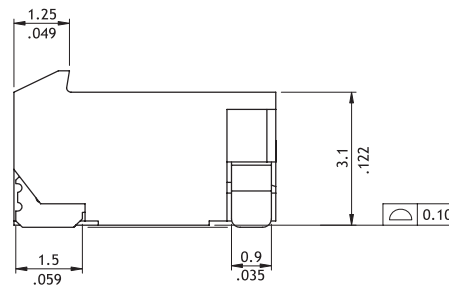

Ordering Code






① CI 07 ② 02 ③ M ④ 1 ⑤ H ⑥ R ⑦ L - ⑧ NH

- ①** Series No.
- ②** No. of Circuits: 02
- ③** M = SMT Type
- ④** Plating Code:
1 = Matte Tin over Nickel
- ⑤** Type: H = Side Entry
- ⑥** Packing Options: R = Tape & Reel
- ⑦** Other Options:
L = With Locking Ramp
- ⑧** -NH = For Lead Free IR Process and Halogen-Free

CI08 Series 2.00mm(.079") Wire to Board Connectors SMT & DIP Headers

- ⊙ 3.0mm above the board
- ⊙ Insulation: High temperature plastic UL 94V-0, Color Black
- ⊙ With metal fixed tabs to secure connector in place

RoHS Compliant 

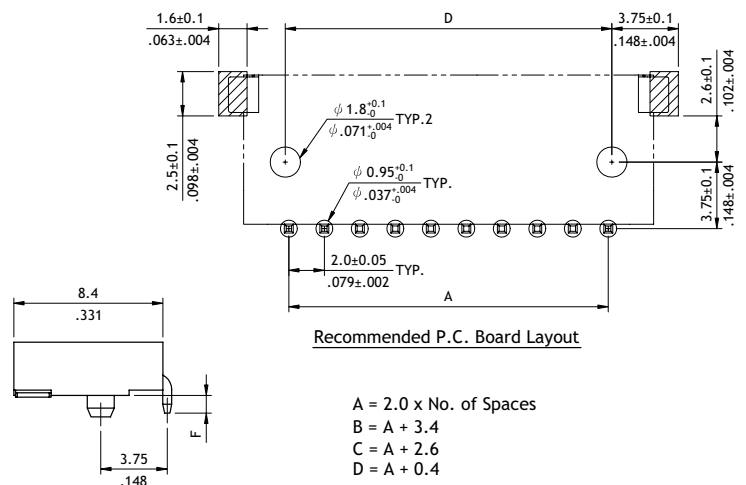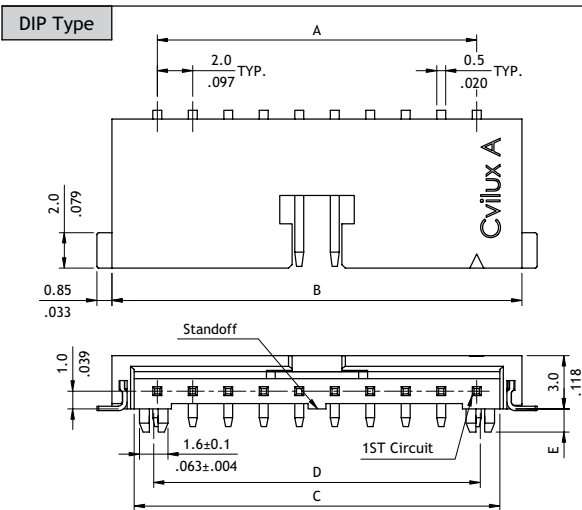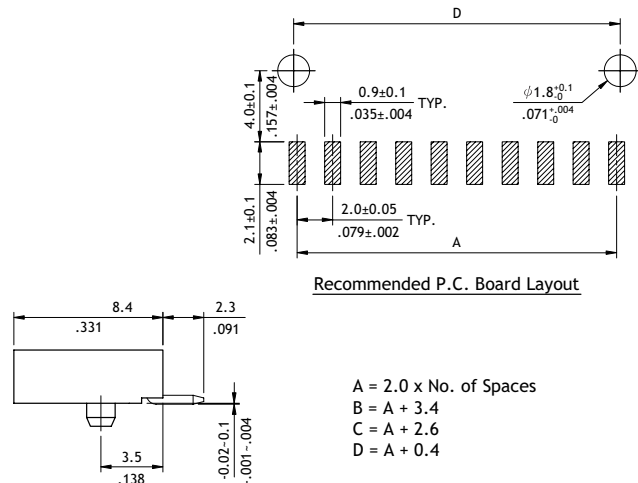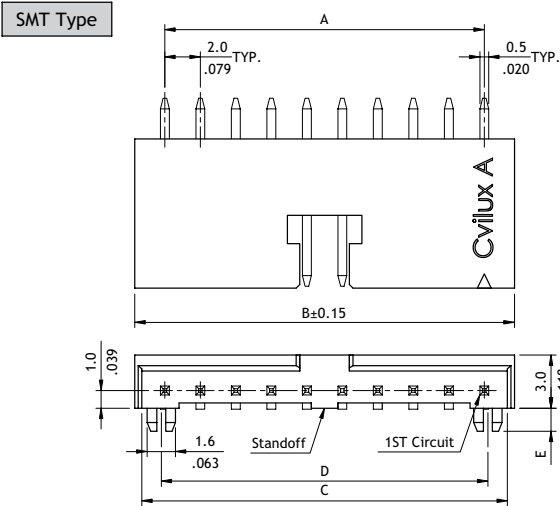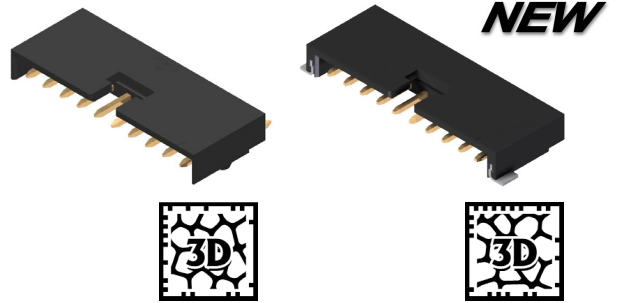

Ordering Code

1 2 3 4 5 6 7 8
CI08 17 M 1 H R 0 - NH



- ① Series No.
- ② No. of Circuits: 03 to 17
- ③ M = SMT Type
- ④ Plating Code: 1 = Matte Tin over Nickel
2 = Gold flash over Nickel
- ⑤ Type: H = Side Entry
- ⑥ Packing Options: R = Tape & Reel
- ⑦ Other Options: 0 = DIM.E = 0.9 (Standard)
- ⑧ -NH = For Lead Free IR Process and Halogen-Free

1 2 3 4 5 6 7 8
CI08 10 P 1 H R 0 - NH




- ① Series No.
- ② No. of Circuits: 03 to 10
- ③ P = DIP Type
- ④ Plating Code: 1 = Matte Tin over Nickel
2 = Gold flash over Nickel
- ⑤ Type: H = Side Entry
- ⑥ Packing Options: R = Tape & Reel
- ⑦ Other Options: 0 = DIM.E = 0.9 ; DIM.F = 1.0 (Standard)
- ⑧ -NH = For Lead Free IR Process and Halogen-Free

CI09 Series 2.00mm(.079") Wire to Board Connectors Housing & Terminal


- ⊙ Mate with CI09 Header
- ⊙ Can be used CI09 Crimp Clip Terminal
- ⊙ Insulator: Glass filled polyester UL 94V-0, Color Nature

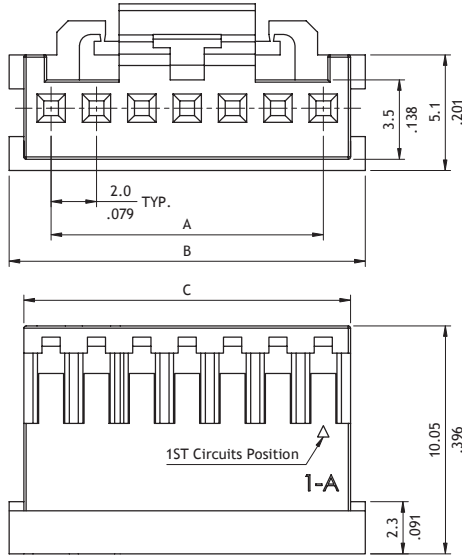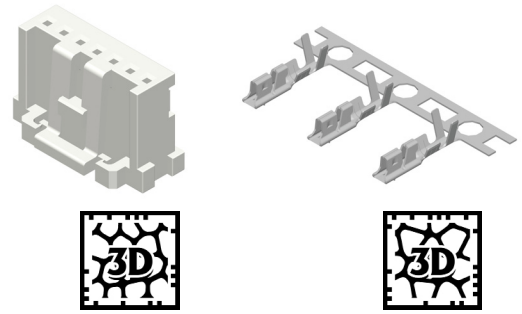

A = 2.00 x NO. OF SPACES
 B = A + 3.70
 C = A + 2.40

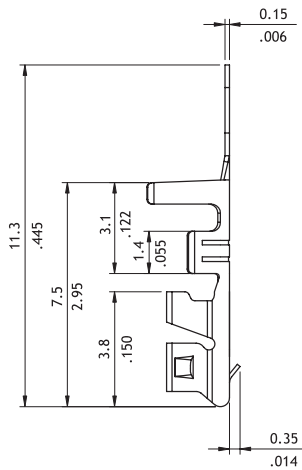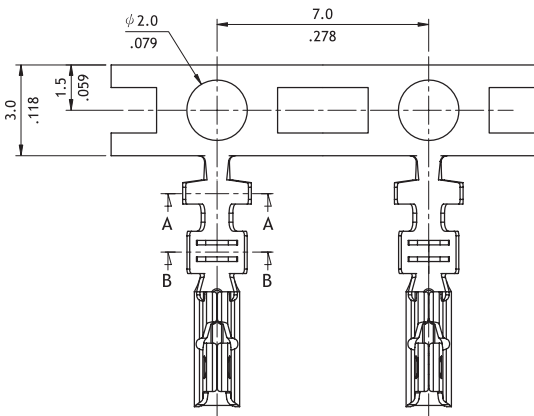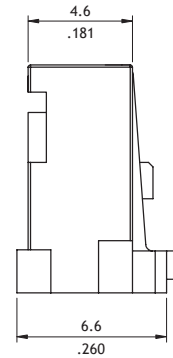

Wire Range	Insulation Diameter	Reel Q'ty
AWG #22-#26	1.5 (.060) MAX.	8,000 PCS.

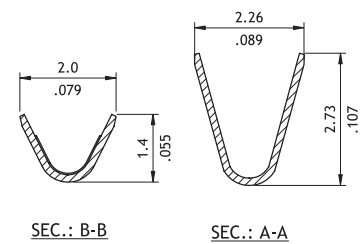

Ordering Code

1 **2** **3** **4** **5** **6** **7**
CI09 10 S L 00 0 - NH




- 1** Series No.
- 2** Contact: 02 to 10
- 3** S = Housing
- 4** L = With Latch
- 5** Color: 00 = Nature
- 6** Other Options: 0 = Standard
- 7** -NH = Halogen-Free

1 **2** **3** **4** **5** **6**
CI09 T01 1 P E 0



- 1** Series No.
- 2** Type: T01 = AWG #22 ~ #26
- 3** Plating Code: 1 = Tin over plated
- 4** Material: P = Phosphor Bronze
- 5** Plating Method: E = Pre-tinned
- 6** Other Options: 0 = Standard

CI09 Series 2.00mm(.079") Wire to Board Connectors DIP Headers

- Mate with CI09 Housing
- Insulator: High temperature plastic UL 94V-0, Color Nature
- With kinked DIP pin to secure connector in place

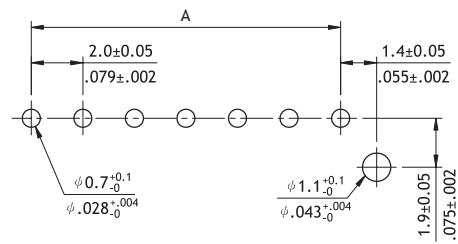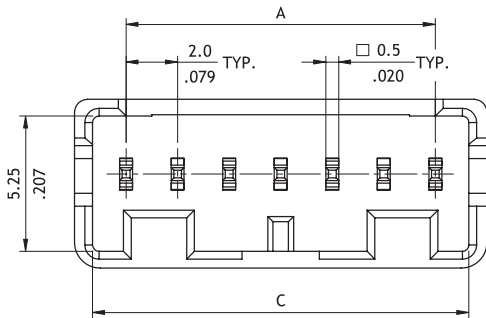

Recommended P.C. Board Layout

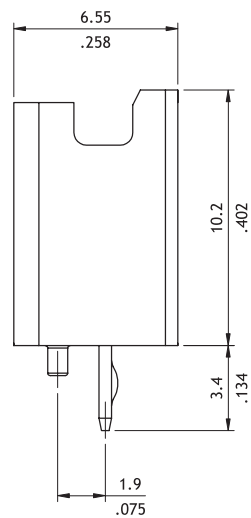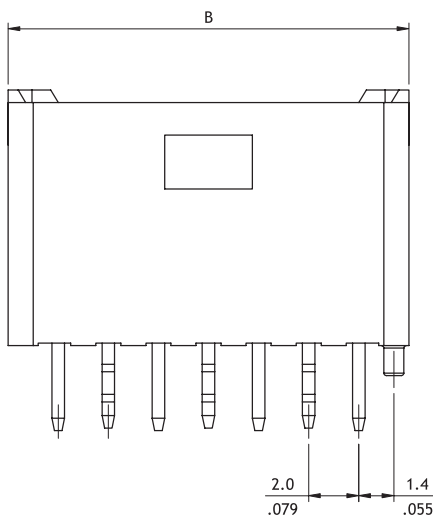

A = 2.0 x No. of Spaces
 B = A + 4.0
 C = A + 2.6

Ordering Code





1 **2** **3** **4** **5** **6** **7** **8**
CI09 10 P 1 V K 0 - NH

- 1** Series No.
- 2** No. of Circuits: 02 to 10
- 3** P = DIP Type
- 4** Plating Code:
1 = Matte Tin over Nickel




- 5** Type: V = Straight
- 6** Other Options: K = Pin kinked
- 7** Color: 0 = Nature (Standard)
3 = Red
- 8** -NH = For Lead Free soldering process and Halogen-Free

CI01 Series 2.00mm(.079") Single Row Wire to Board Housing & Terminal



- Low profile Latch Housing
- Mate with CI01 Header
- Can be used CI01 Crimp Clip Terminal
- Insulator: Nylon 66 UL 94V-0, Color Nature
- Termianl: Tin plated Phosphor Bronze

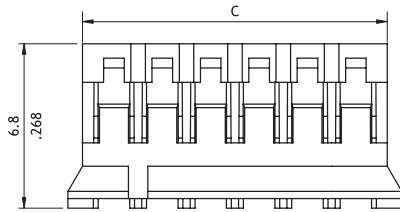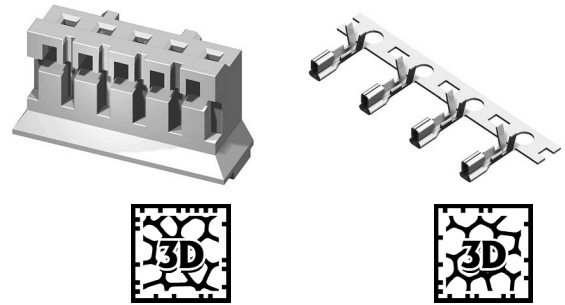

A = 2.0 x No. of Spaces
 B = A + 3.8
 C = A + 2.6

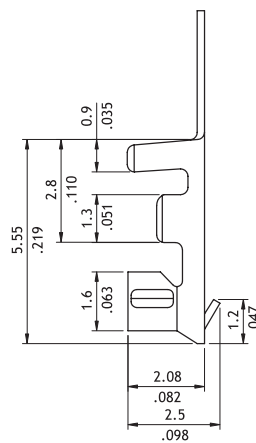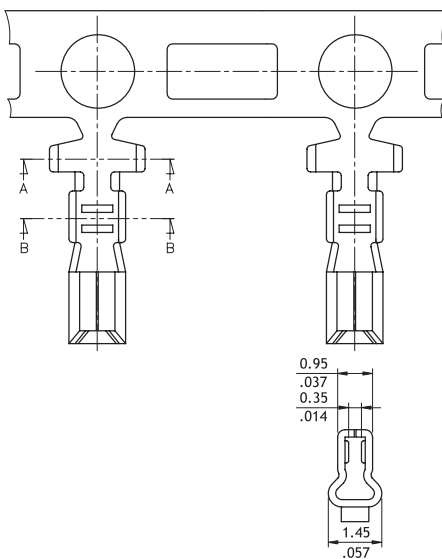

Wire Range	Insulation Diameter	Reel Qty
AWG #24-#28	1.50 (.059) MAX.	10,000 PCS.



Ordering Code

1 **2** **3** **4**
CI01 16 S 0000 - A


- 1 Series No.
- 2 No. of Circuits: 02 to 16
- 3 S = Housing
- 4 Other Options:
 0000 - A = Standard
 *Special options consult manufacturer

1 **2** **3** **4** **5**
CI01 T01 1 P E0 - A


- 1 Series No.
- 2 Type: T01 = AWG #24 ~ #28
- 3 Plating Code: 1 = Tin over plated
- 4 Material: P = Phosphor Bronze
- 5 Other Options: E0 - A = Standard

CI01 Series 2.00mm(.079") Single Row Wire to Board DIP Headers

- Low profile, Pin kinked
- With locking slots
- Mate with CI01 Housing
- Insulator: Polyamide UL 94V-0, Color Nature
- With Tin plated 0.5mm square pin


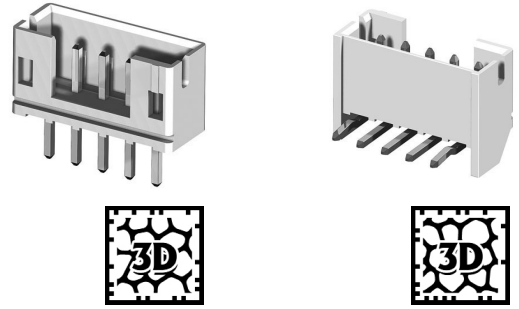


Straight

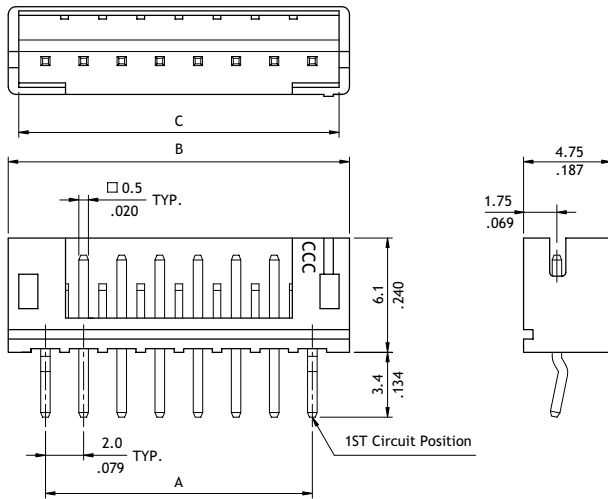

Circuits	Dimension		
	A	B	C
2	2.0(.079)	6.0(.236)	4.9(.193)
3	4.0(.157)	8.0(.315)	6.9(.272)
4	6.0(.236)	10.0(.394)	8.9(.350)
5	8.0(.315)	12.0(.472)	10.9(.429)
6	10.0(.394)	14.0(.551)	12.9(.508)
7	12.0(.472)	16.0(.630)	14.9(.587)
8	14.0(.551)	18.0(.709)	16.9(.665)
9	16.0(.630)	20.0(.787)	18.9(.744)
10	18.0(.709)	22.0(.866)	20.9(.823)
11	20.0(.787)	24.0(.945)	22.9(.902)
12	22.0(.866)	26.0(1.024)	24.9(.980)
13	24.0(.945)	28.0(1.102)	26.9(1.059)
14	26.0(1.024)	30.0(1.181)	28.9(1.138)
15	28.0(1.102)	32.0(1.260)	30.9(1.217)
16	30.0(1.181)	34.0(1.338)	32.9(1.295)

Right Angle

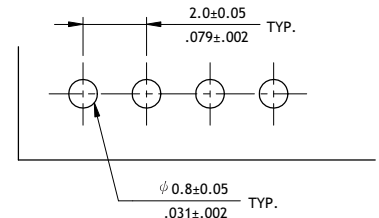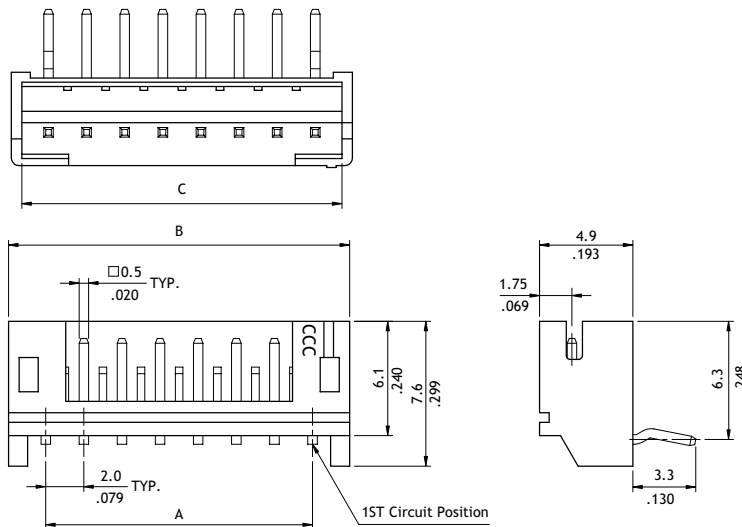


Ordering Code

1 **2** **3** **4** **5** **6** **7**
CI01 16 P 1 V K0 - NH



- 1** Series No.
- 2** No. of Circuits: 02 to 16
- 3** P = DIP Type
- 4** Plating Code: 1 = Matte Tin over Nickel
- 5** Type: V = Straight
H = Right Angle
- 6** Other Options: 00 = Without Pin Kinked
K0 = With Pin Kinked (Standard)
*Special options consult manufacturer
- 7** -LF = For Lead Free soldering process
-NH = For Lead Free soldering process and Halogen-Free

CI01 Series 2.00mm(.079") Single Row Wire to Board SMT Headers

- Polarization and Low-profile
- Locking slots provide secure mating
- Fixed tabs provide PCB hold-down
- Mate with CI01 Housing
- Insulator: Polyamide UL 94V-0, Color Nature
- Termianl: Tin plated Brass

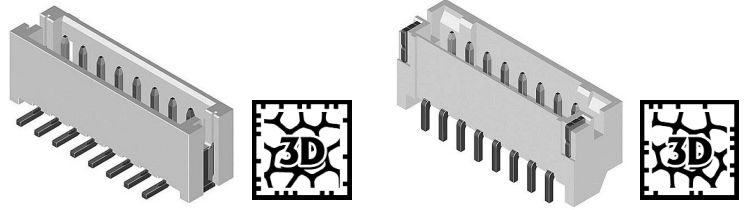



Top Entry

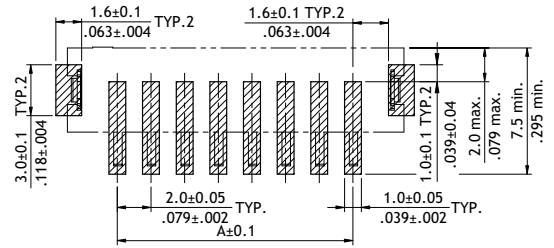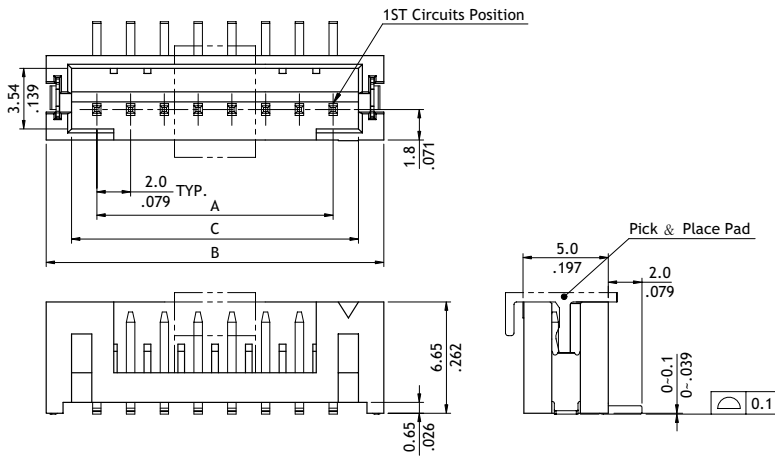

Recommended P.C. Board Layout

Circuits	Dimension		
	A	B	C
2	2.0(.079)	8.0(.315)	5.0(.197)
3	4.0(.157)	10.0(.394)	7.0(.276)
4	6.0(.236)	12.0(.472)	9.0(.354)
5	8.0(.315)	14.0(.551)	11.0(.433)
6	10.0(.394)	16.0(.630)	13.0(.512)
7	12.0(.472)	18.0(.709)	15.0(.591)
8	14.0(.551)	20.0(.787)	17.0(.669)
9	16.0(.630)	22.0(.866)	19.0(.748)
10	18.0(.709)	24.0(.945)	21.0(.827)
11	20.0(.787)	26.0(1.024)	23.0(.906)
12	22.0(.866)	28.0(1.102)	25.0(.984)
13	24.0(.945)	30.0(1.181)	27.0(1.063)
14	26.0(1.024)	32.0(1.260)	29.0(1.142)
15	28.0(1.102)	34.0(1.339)	31.0(1.220)
16	30.0(1.181)	36.0(1.417)	33.0(1.299)

Side Entry

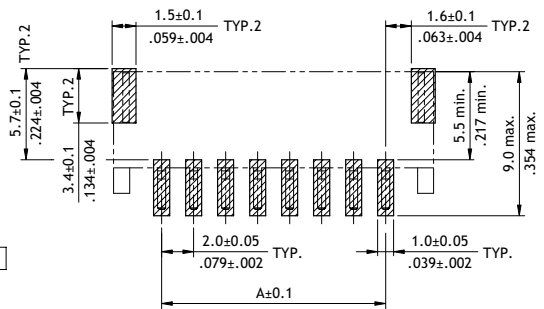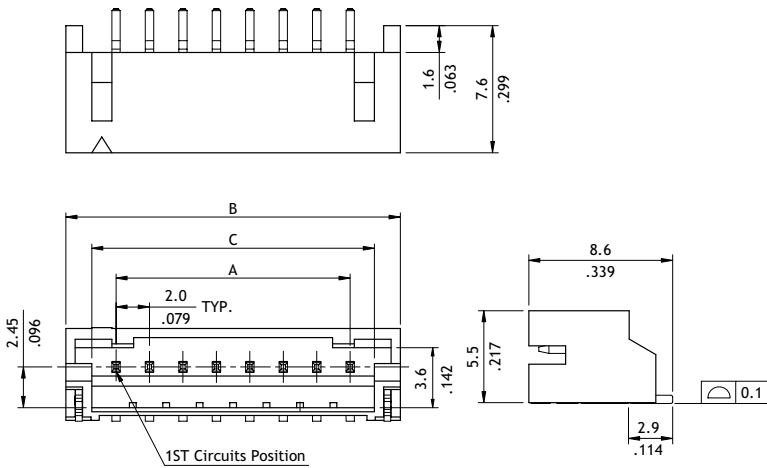

Recommended P.C. Board Layout



Ordering Code

① CI 01 ② 15 ③ M ④ 1 ⑤ V R ⑥ 0 - ⑦ NH ⑧




- ① Series No.
- ② No. of Circuits: Top Entry: 02 to 15
Side Entry: 02 to 16
- ③ M = SMT Type
- ④ Plating Code: 1 = Matte Tin over Nickel
- ⑤ Type: V = Top Entry
H = Side Entry
- ⑥ Packing Options: T = Tube
R = Tape & Reel
(Top Entry type with pick & place Pad)
- ⑦ Other Options: 0 = Standard
*Special options consult manufacturer
- ⑧ -LF = For Lead Free IR process
-NH = For Lead Free IR process and Halogen-Free

CI01 Series 2.00mm(.079") Single Row Wire to Board Housing & SMT Header

- With locking latch provide secure mating
- Fixed tabs provide PCB hold-down
- Insulator: Polyamide UL 94V-0, Color Nature
- Housing mate with CI06 Terminal (P/N: CI06T011PE0)

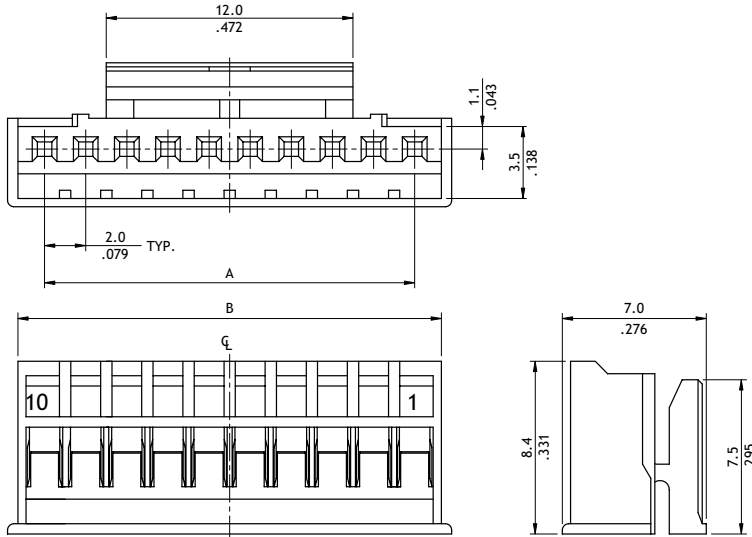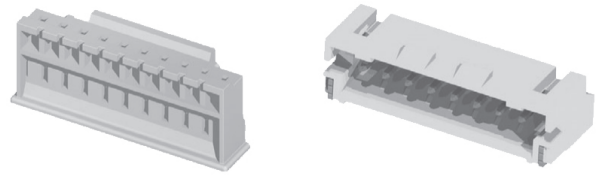

Circuits	Dimension	
	A	B
10	18.0(.709)	20.6(.811)
12	22.0(.866)	24.6(.969)
14	26.0(1.024)	28.6(1.126)
16	30.0(1.181)	32.6(1.283)

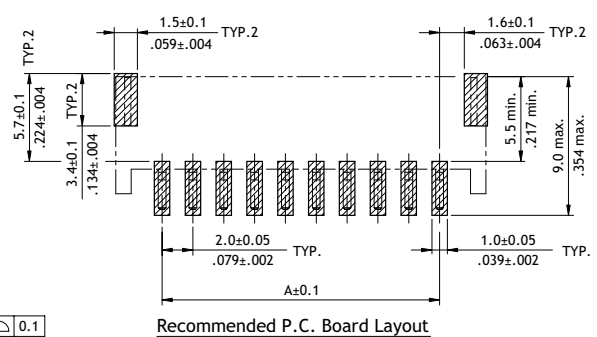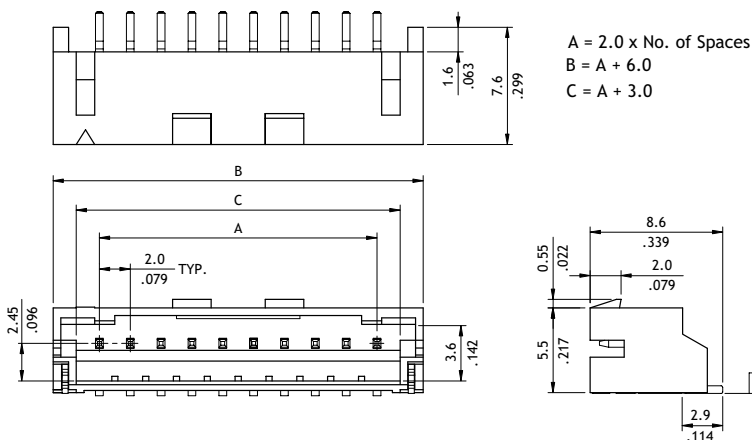

Ordering Code

1 2 3 4 5
CI01 16 S 00L 0



- ① Series No.
- ② No. of Circuits: 10, 12, 14, 16
- ③ S = Housing
- ④ Latch Options:
00L = With Locking Latch
- ⑤ Other Options:
0 = Standard (Color Nature)
*Special options consult manufacturer

1 2 3 4 5 6 7 8
CI01 16 M 1 H R 0 - NH

- ① Series No.
- ② No. of Circuits: 10, 12, 14, 16
- ③ M = SMT Type
- ④ Plating Code: 1 = Matte Tin over Nickel
- ⑤ Type: H = Side Entry
- ⑥ Packing Options: R = Tape & Reel ; T = Tube
- ⑦ Other Options: L = With Locking Latch
0 = Standard (for -LC type)
- ⑧ -NH = For Lead Free soldering process and Halogen-Free
-LC = For Lead Free soldering process


CI01 Series 2.00mm(.079") Dual Row Wire to Board Housing & Terminal

- Low profile Latch with Housing
- Mate with CI01, CH71, CH72, CH74, CH75 Header
- Can be used CI01 Crimp Clip Terminal (P/N: CI01TD21PE0)
- Insulator: Nylon 66 UL 94V-0, Color Nature




P/N CI01**SD000

A = 2.0 x (No. of Circuits/2-1)
 B = A + 3.9
 C = A + 2.5


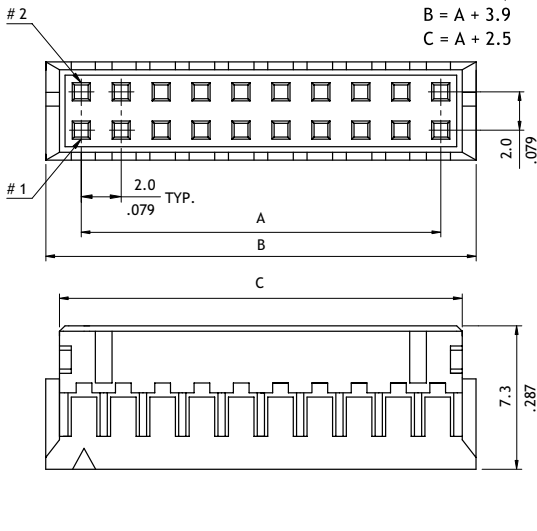


P/N CI01**SD0L0


A = 2.0 x (No. of Circuits/2-1)
 D = A + 2.3

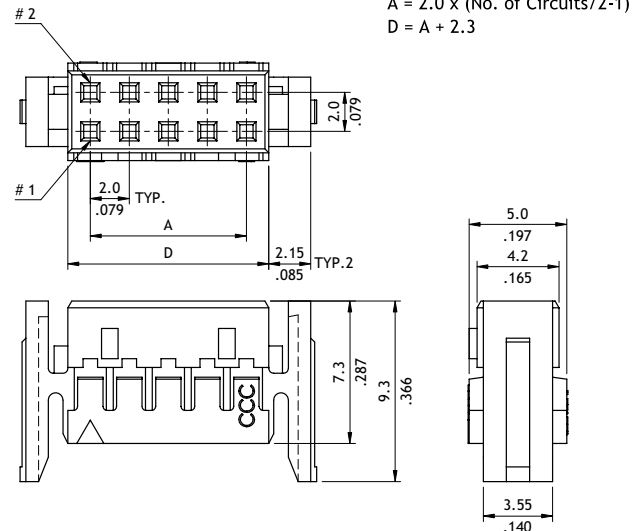


P/N CI01TD21PE0

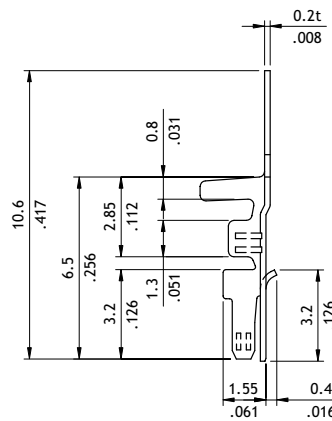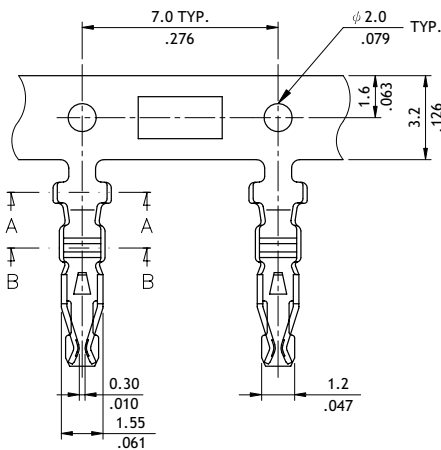

Wire Range	Insulation Diameter	Reel Qty
AWG #22-#28	1.60 (.063) MAX.	10,000 PCS.



SEC.: A-A



SEC.: B-B

Ordering Code

1 CI01 **2** 16 **3** S **4** D0 **5** 00

- ① Series No.
- ② No. of Circuits: 06 to 34
- ③ S = Housing
- ④ D0 = Dual Row Type
- ⑤ Other Options: 00 = Without Locking Latch
 L0 = With Locking Latch


*Special options consult manufacturer

1 CI01 **2** TD2 **3** 1 **4** P **5** E **6** 0



- ① Series No.
- ② Type: TD2 = AWG #22 ~ #28
- ③ Plating Code: 1 = Tin plated
- ④ Material: P = Phosphor Bronze
- ⑤ Plating Method: E = Pre-tinned
- ⑥ Other Options: 0 = Standard

CI01 Series 2.00mm(.079") Dual Row Wire to Board Connectors DIP Headers


- With locking slots
- Mate with CI01 Dual Row Housing
- Insulator: Polyamide UL 94V-0, Color Nature
- With Tin plated 0.5mm square pin

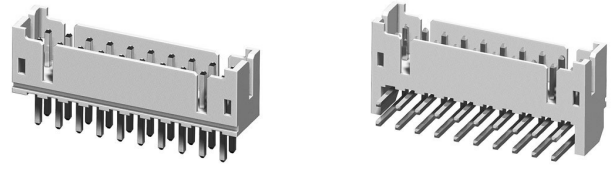



Straight

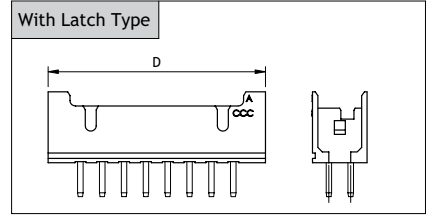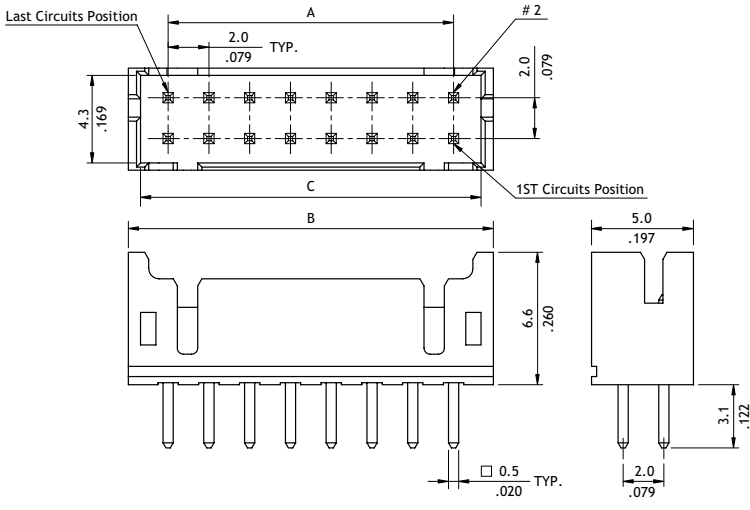

A = 2.0 x No. of Spaces
 B = A + 3.9
 C = A + 2.7
 D = A + 5.9

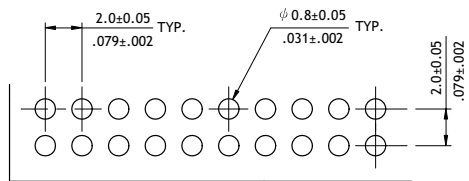

Right Angle

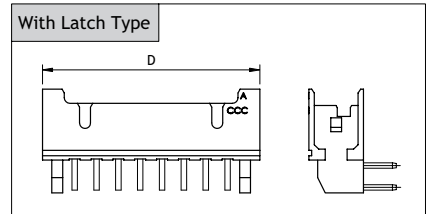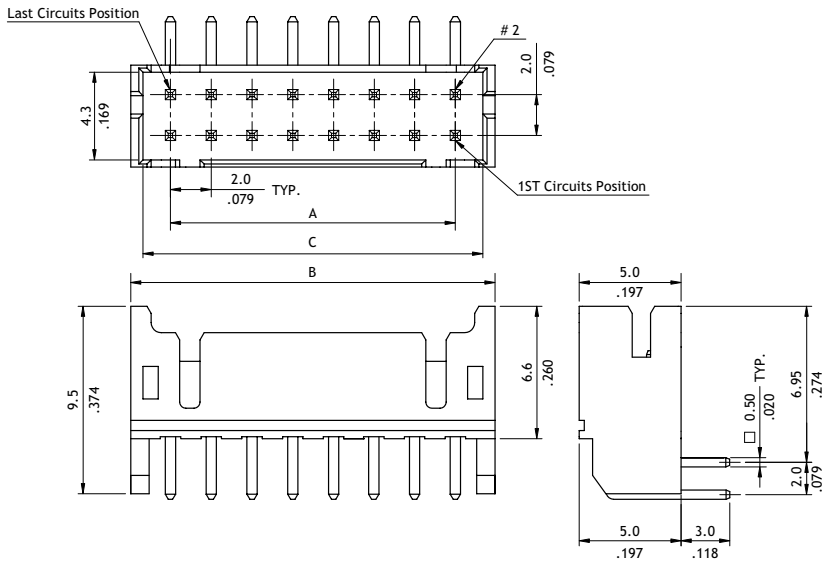

Ordering Code

① CI ② 01 ③ P ④ 1 ⑤ V ⑥ D ⑦ 0 - ⑧ NH


- ① Series No.
- ② No. of Circuits: 06 to 34
- ③ P = DIP Type
- ④ Plating Code: 1 = Matte Tin over Nickel
- ⑤ Type: V = Straight
H = Right Angle
- ⑥ D = Dual Row Header
- ⑦ Other Options: 0 = Standard
L = With Locking Ramp
- ⑧ -LF = For Lead Free soldering process
-NH = For Lead Free soldering process and Halogen-Free
*Special options consult manufacturer

CI


WIRE TO BOARD

CI02 Series 2.00mm(.079") Board In Connectors


- Low profile Housing
- Mate with CI02 Crimp board in Terminal
- Insulator: Nylon 66 UL 94V-0, Color Nature
- Terminal: Tin plated Copper alloy



P/N CI02**S0000-A

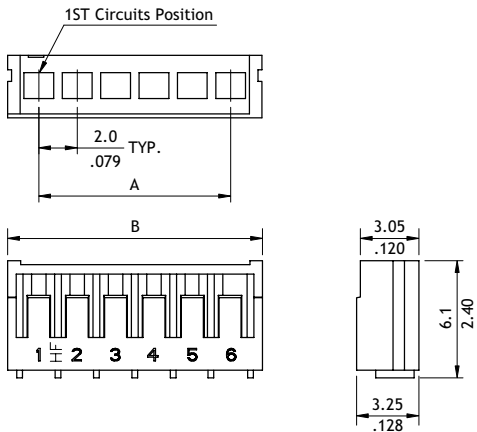


P/N CI02**S000H-A

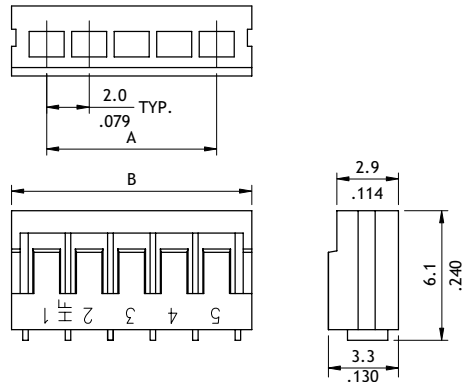


Circuits	Dimension	
	A	B
2	2.0(.079)	5.2(.205)
3	4.0(.157)	7.2(.283)
4	6.0(.236)	9.2(.362)
5	8.0(.315)	11.2(.441)
6	10.0(.394)	13.2(.520)
7	12.0(.472)	15.2(.598)
8	14.0(.551)	17.2(.677)
9	16.0(.630)	19.2(.756)
10	18.0(.709)	21.2(.835)
11	20.0(.787)	23.2(.913)
12	22.0(.866)	25.2(.992)
13	24.0(.945)	27.2(1.071)
14	26.0(1.024)	29.2(1.150)
15	28.0(1.102)	31.2(1.228)
16	30.0(1.181)	33.2(1.307)
17	32.0(1.260)	35.2(1.386)
18	34.0(1.339)	37.2(1.465)
19	36.0(1.417)	39.2(1.543)
20	38.0(1.496)	41.2(1.622)

P/N CI02T021*E0-A

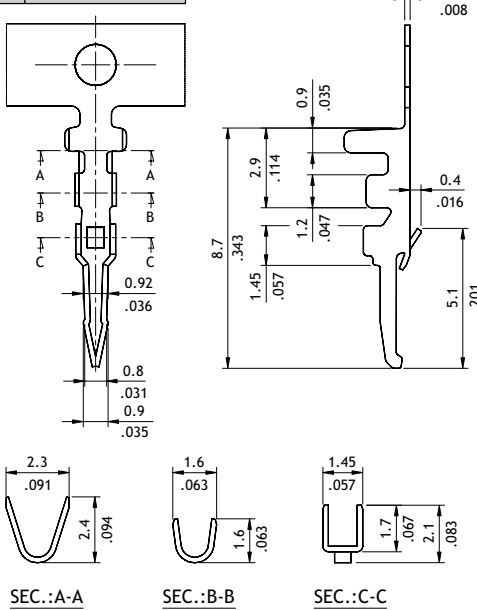

P/N CI02T021*EH-A

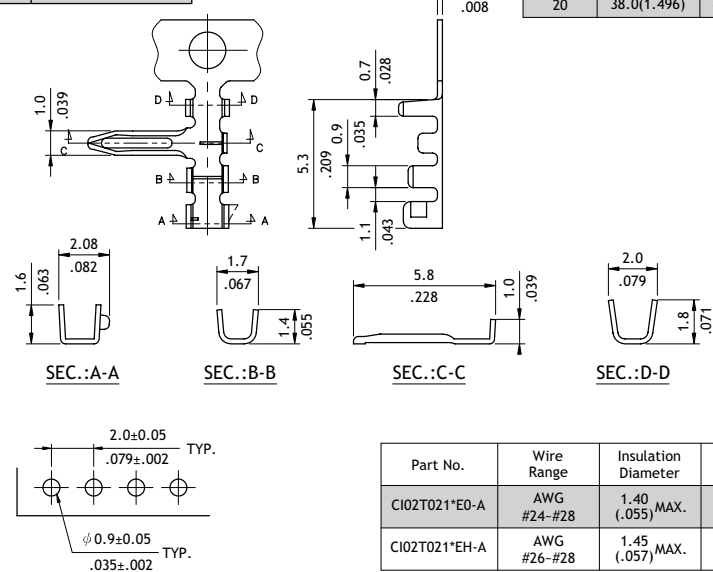

Recommended P.C. Board Layout

Part No.	Wire Range	Insulation Diameter	Reel Qty
CI02T021*E0-A	AWG #24-#28	1.40 (.055) MAX.	10,000 PCS.
CI02T021*EH-A	AWG #26-#28	1.45 (.057) MAX.	10,000 PCS.

Ordering Code

1 **2** **3** **4**
CI02 20 S 0000 - A




- ① Series No.
- ② No. of Circuits: 02 to 20
- ③ S = Housing
- ④ Other Options:
 0000 - A = For Straight Terminal
 000H - A = For Right Angle Terminal
 *Special options consult manufacturer

1 **2** **3** **4** **5** **6**
CI02 T02 1 P P 0 - A

- ① Series No.
- ② Type: T02 = AWG #24 ~ #28 (Straight)
 T02 = AWG #26 ~ #28 (Right Angle)
- ③ Plating Code: 1 = Tin over Nickel plated
- ④ Material: P = Phosphor Bronze ; B = Brass
- ⑤ Plating Method: P = Post plating
- ⑥ Terminal Style: 0 - A = Straight ; H - A = Right Angle



CI06 Series 2.00mm(.079") Wire to Board Connectors Housing & Terminal

- With locking latch provides secure mating
- Mate with CI06 Header
- Can be used CI06 Crimp Clip Terminal
- Insulator: Nylon 66 UL 94V-0, Color Nature

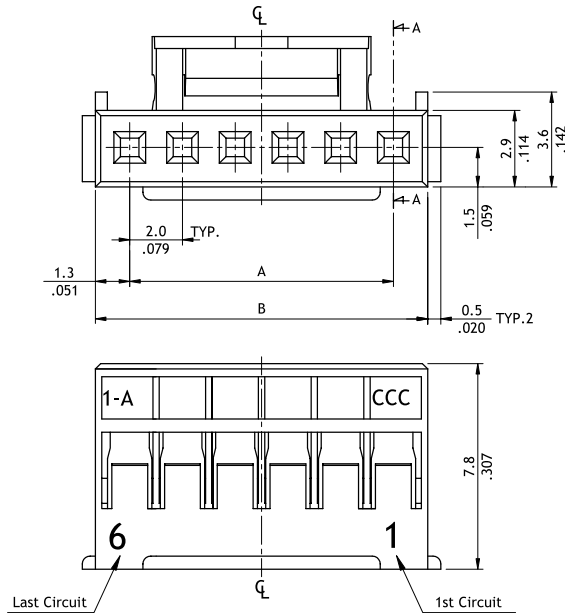


SEC A-A


Circuits	Dimension	
	A	B
2	2.0(.079)	4.6(.181)
3	4.0(.157)	6.6(.260)
4	6.0(.236)	8.6(.339)
5	8.0(.315)	10.6(.417)
6	10.0(.394)	12.6(.496)
7	12.0(.472)	14.6(.575)
8	14.0(.551)	16.6(.654)
9	16.0(.630)	18.6(.732)
10	18.0(.709)	20.6(.811)
11	20.0(.787)	22.6(.890)
12	22.0(.866)	24.6(.969)
13	24.0(.945)	26.6(1.047)
14	26.0(1.024)	28.6(1.126)
15	28.0(1.102)	30.6(1.205)
16	30.0(1.181)	32.6(1.283)

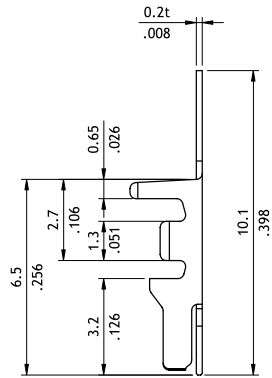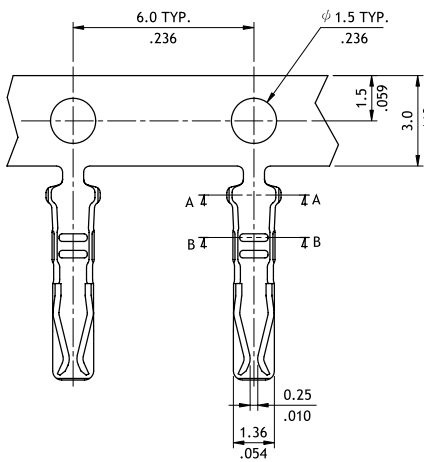

Wire Range	Insulation Diameter	Reel Qty
AWG #24-#30	0.80 Min. (.031) 1.45 MAX. (.057)	10,000 PCS.



A-A SEC.



B-B SEC.

Ordering Code

1 CI06 **2** 16 **3** S **4** 0000


- ① Series No.
- ② No. of Circuits: 02 to 16
- ③ S = Housing
- ④ Other Options:
0000 = Standard
*Special options consult manufacturer

1 CI06 **2** T01 **3** 1 **4** P **5** E **6** 0



- ① Series No.
- ② Type: T01 = AWG #24 ~ #30
- ③ Plating Code: 1 = Tin over Nickel
- ④ Material: P = Phosphor Bronze
- ⑤ Plating Method: E = Pre-tinned
- ⑥ Other Options: 0 = Standard

CI06 Series 2.00mm(.079") Wire to Board Connectors DIP & SMT Headers

- With locks provide secure mating
- Mate with CI06 Housing
- Insulator: Polyamide UL 94V-0, Color Nature
- With Tin plated 0.5mm square pin


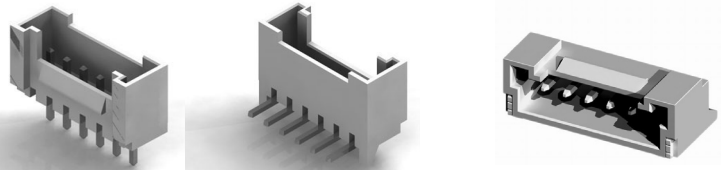


Straight DIP

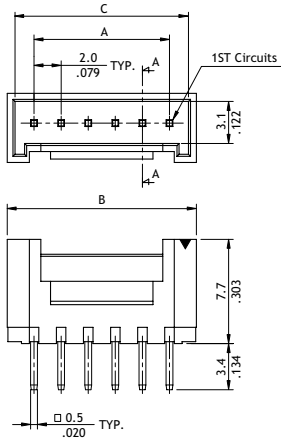


Circuits	Dimension		
	A	B	C
2	2.0(.079)	5.96(.235)	4.8(.189)
3	4.0(.157)	7.96(.313)	6.8(.268)
4	6.0(.236)	9.96(.392)	8.8(.346)
5	8.0(.315)	11.96(.471)	10.8(.425)
6	10.0(.394)	13.96(.550)	12.8(.504)
7	12.0(.472)	15.96(.628)	14.8(.583)
8	14.0(.551)	17.96(.707)	16.8(.661)
9	16.0(.630)	19.96(.786)	18.8(.740)
10	18.0(.709)	21.96(.865)	20.8(.819)
11	20.0(.787)	23.96(.943)	22.8(.898)
12	22.0(.866)	25.96(1.022)	24.8(.976)
13	24.0(.945)	27.96(1.101)	26.8(1.055)
14	26.0(1.024)	29.96(1.180)	28.8(1.134)
15	28.0(1.102)	31.96(1.258)	30.8(1.213)
16	30.0(1.181)	33.96(1.337)	32.8(1.291)



Right Angle DIP

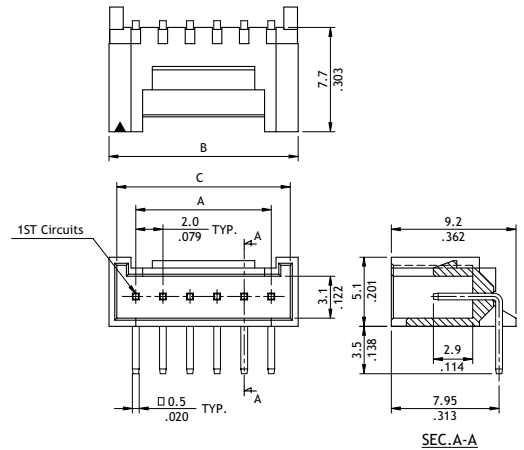

SMT Type

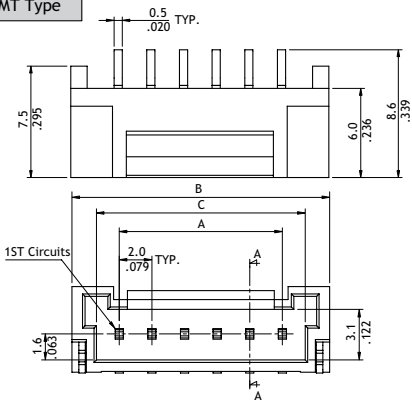

A = 2.0 x No. of Spaces
 B = A + 5.8
 C = A + 2.8

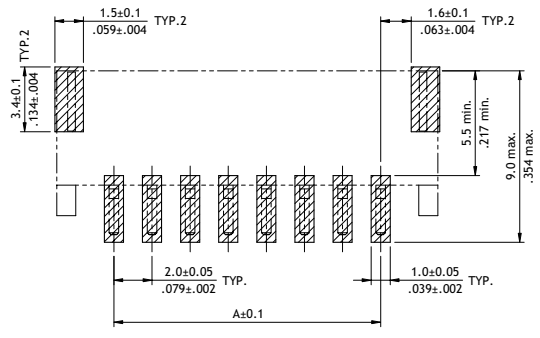

Ordering Code

1 2 3 4 5 6 7
CI06 16 P 1 V 00 - NH



- 1** Series No.
- 2** No. of Circuits: 02 to 16
- 3** P = DIP Type
- 4** Plating Code: 1 = Matte Tin over Nickel
- 5** Type: V = Straight ; H = Right Angle
- 6** Other Options: 00 = Standard
- 7** -LF = For Lead Free soldering process
 -NH = For Lead Free soldering process and Halogen-Free
 *Special options consult manufacturer

1 2 3 4 5 6 7 8
CI06 15 M 1 H R 0 - NH


- 1** Series No.
- 2** No. of Circuits: 02 to 15
- 3** M = SMT Type
- 4** Plating Code: 1= Matte Tin over Nickel
- 5** Type: H = Side Entry
- 6** Packing: R = Tape & Reel ; T = Tube
- 7** Other Options: 0 = Standard
- 8** -LF = For Lead Free soldering process
 -NH = For Lead Free soldering process and Halogen-Free

CI21 Series 2.50mm(.098") Wire to Board Connectors Housing & Terminal


- Low profile with locking ribs
- Mate with CI21 Header
- Can be used CI21 crimp clip terminal
- Insulator: Nylon 66 UL 94V-0, Color Nature
- Terminal: Tin plated Phosphor Bronze

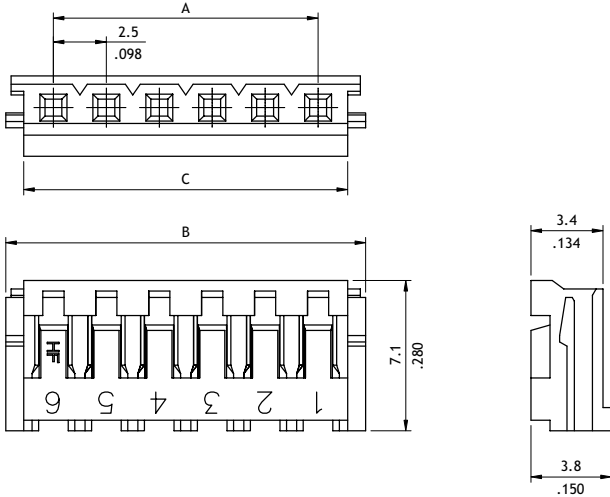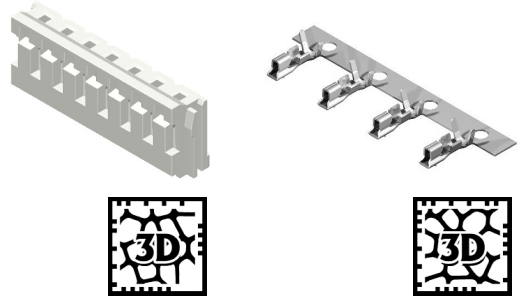

Circuits	Dimension		
	A	B	C
2	2.5(.098)	7.0(.276)	5.4(.213)
3	5.0(.197)	9.5(.374)	7.9(.311)
4	7.5(.295)	12.0(.472)	10.4(.409)
5	10.0(.394)	14.5(.571)	12.9(.508)
6	12.5(.492)	17.0(.669)	15.4(.606)
7	15.0(.591)	19.5(.768)	17.9(.705)
8	17.5(.689)	22.0(.866)	20.4(.803)
9	20.0(.787)	24.5(.965)	22.9(.902)
10	22.5(.886)	27.0(1.063)	25.4(1.000)
11	25.0(.984)	29.5(1.161)	27.9(1.098)
12	27.5(1.083)	32.0(1.260)	30.4(1.197)
13	30.0(1.181)	34.5(1.358)	32.9(1.295)
14	32.5(1.280)	37.0(1.457)	35.4(1.394)
15	35.0(1.378)	39.5(1.555)	37.9(1.492)

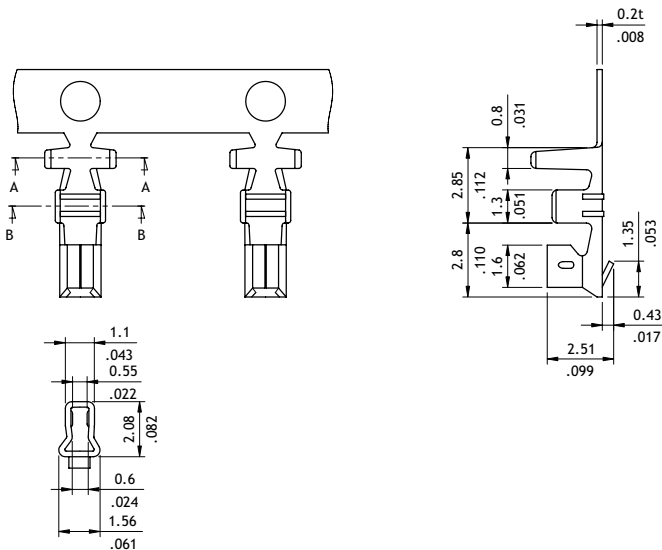

Wire Range	Insulation Diameter	Reel Qty
AWG #24-#28	1.9 (.075) MAX.	10,000 PCS.



Ordering Code

1 CI21 **2** 15 **3** S **4** 0000


- ① Series No.
- ② No. of Circuits: 02 to 15
- ③ S = Housing
- ④ Other Options:
0000 = Standard
*Special options consult manufacturer

1 CI21 **2** T02 **3** 1 **4** P **5** E0


- ① Series No.
- ② Type: T02 = AWG #24 ~ #28
- ③ Plating Code: 1 = Tin over Nickel
- ④ Material: P = Phosphor Bronze
- ⑤ Other Options: E0 = Standard

CI21 Series 2.50mm(.098") Wire to Board Connectors DIP Headers

- With locking slots and Pin kinked
- Mate with CI21 Housing
- Insulator: Polyamide UL 94V-0, Color Nature
- With Tin plated 0.64mm square pin


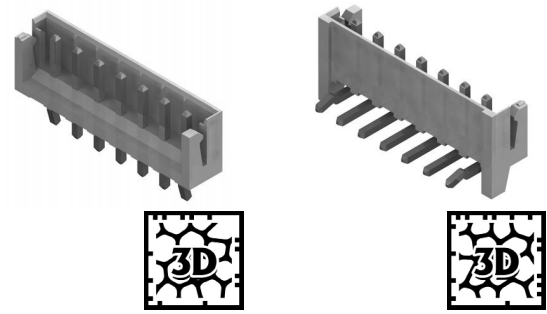


Straight

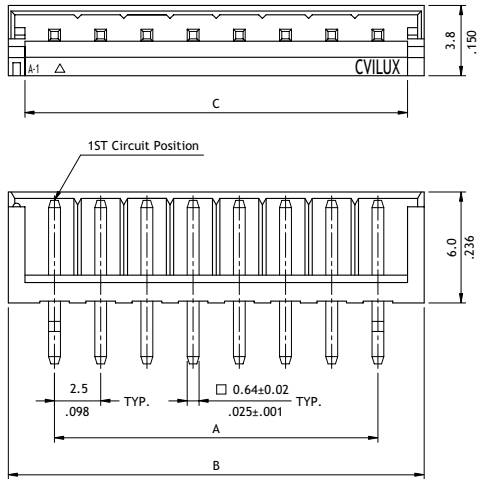

Circuits	Dimension		
	A	B	C
2	2.5(.098)	7.5(.295)	5.7(.224)
3	5.0(.197)	10.0(.394)	8.2(.323)
4	7.5(.295)	12.5(.492)	10.7(.421)
5	10.0(.394)	15.0(.591)	13.2(.520)
6	12.5(.492)	17.5(.689)	15.7(.618)
7	15.0(.591)	20.0(.787)	18.2(.717)
8	17.5(.689)	22.5(.886)	20.7(.815)
9	20.0(.787)	25.0(.984)	23.2(.913)
10	22.5(.886)	27.5(1.083)	25.7(1.012)
11	25.0(.984)	30.0(1.181)	28.2(1.110)
12	27.5(1.083)	32.5(1.280)	30.7(1.209)
13	30.0(1.181)	35.0(1.378)	33.2(1.307)
14	32.5(1.280)	37.5(1.476)	35.7(1.406)
15	35.0(1.378)	40.0(1.575)	38.2(1.504)

Right Angle

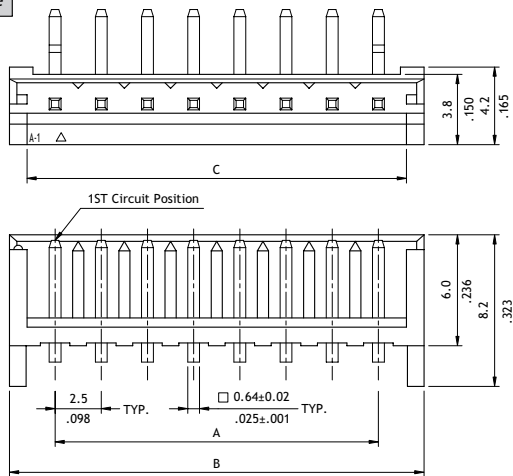

Recommended P.C. Board Layout





Ordering Code

① CI 21 ② 1 5 ③ P ④ 1 ⑤ V ⑥ K 0 - ⑦ NH


- ① Series No.
- ② No. of Circuits: 02 to 15
- ③ P = DIP Type
- ④ Plating Code: 1 = Matte Tin over Nickel
- ⑤ Type: V = Straight
H = Right Angle
- ⑥ Other Options: 00 = Without Pin Kinked
K0 = With Pin Kinked (Standard)
- ⑦ -LF = For Lead Free soldering process
-NH = For Lead Free soldering process and Halogen-Free
*Special options consult manufacturer

CI22 Series 2.50mm(.098") Wire to Board Connectors Housing & Terminal





- Low profile with locking ribs
- Mate with CI22 Header
- Can be used CI22 crimp clip terminal
- Insulator: Nylon 66 UL 94V-0, Color Nature
- Terminal: Tin plated Brass or Phosphor Bronze

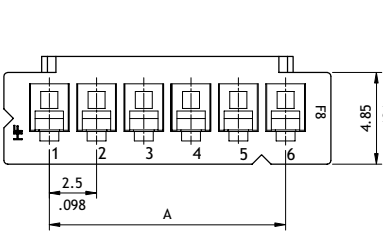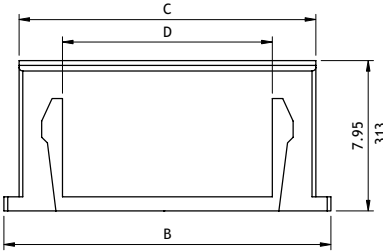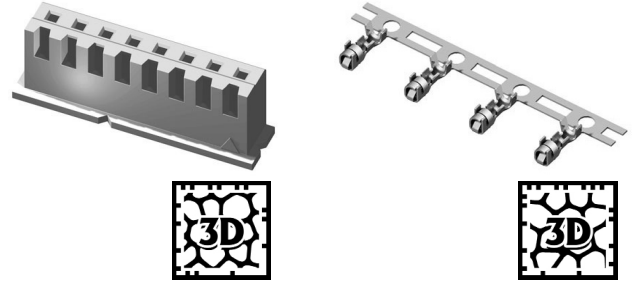

Circuits	Dimension			
	A	B	C	D
2	2.5(.098)	7.3(.287)	5.7(.224)	1.0(.039)
3	5.0(.197)	9.8(.386)	8.2(.323)	3.5(.138)
4	7.5(.295)	12.3(.484)	10.7(.421)	6.0(.236)
5	10.0(.394)	14.8(.583)	13.2(.520)	8.5(.335)
6	12.5(.492)	17.3(.681)	15.7(.618)	11.0(.433)
7	15.0(.591)	19.8(.780)	18.2(.717)	13.5(.531)
8	17.5(.689)	22.3(.878)	20.7(.815)	16.0(.630)
9	20.0(.787)	24.8(.976)	23.2(.913)	18.5(.728)
10	22.5(.886)	27.3(1.075)	25.7(1.012)	21.0(.827)
11	25.0(.984)	29.8(1.173)	28.2(1.110)	23.5(.925)
12	27.5(1.083)	32.3(1.272)	30.7(1.209)	26.0(1.024)
13	30.0(1.181)	34.8(1.370)	33.2(1.307)	28.5(1.122)
14	32.5(1.280)	37.3(1.469)	35.7(1.406)	31.0(1.220)
15	35.0(1.378)	39.8(1.567)	38.2(1.504)	33.5(1.319)

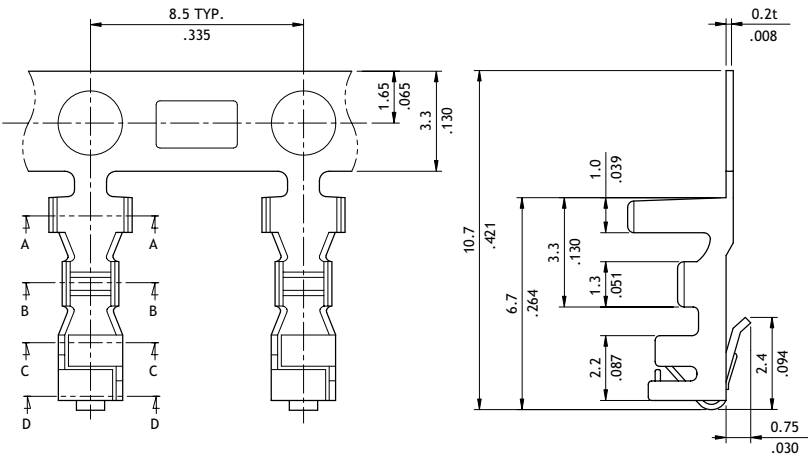

Wire Range	Insulation Diameter	Reel Q'ty
AWG #22-#28	1.60 MAX. (.063)	6,000 PCS.



Ordering Code

1 **2** **3** **4**
CI22 15 S 0000




- ① Series No.
- ② No. of Circuits: 02 to 15
- ③ S = Housing
- ④ Other Options:
0000 = Standard
*Special options consult manufacturer

1 **2** **3** **4** **5** **6**
CI22 T02 1 P E 0




- ① Series No.
- ② Type: T02 = AWG #22 ~ #28
- ③ Plating Code: 1 = Tin over Nickel
- ④ Material: P = Phosphor Bronze
B = Brass
- ⑤ Plating Method: E = Pre-tinned
- ⑥ Other Options: 0 = Standard

CI22 Series 2.50mm(.098") Wire to Board Connectors DIP Headers

- With locking slot and Pin Kinked
- Mate with CI22 Housing
- Insulator: Polyamide UL 94V-0, Color Nature
- With Tin plated 0.64mm square pin

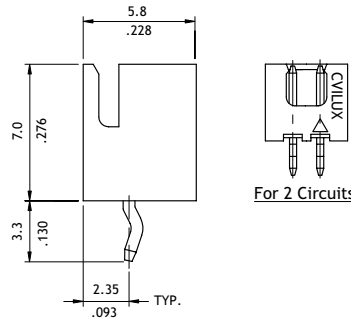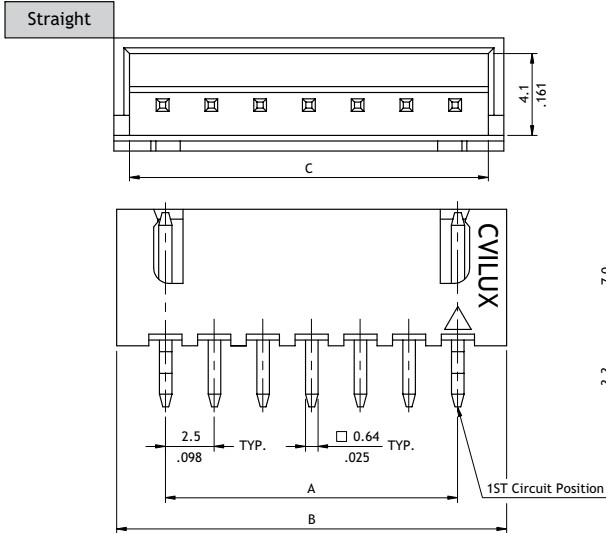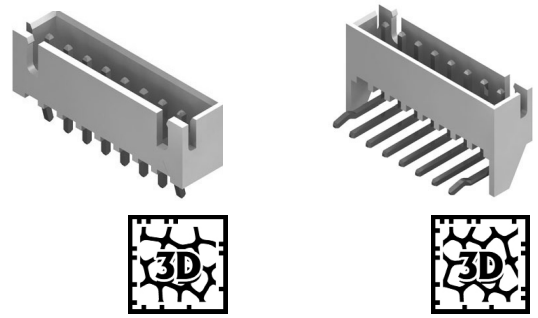

Circuits	Dimension		
	A	B	C
2	2.5(.098)	7.5(.295)	6.0(.236)
3	5.0(.197)	10.0(.394)	8.5(.335)
4	7.5(.295)	12.5(.492)	11.0(.433)
5	10.0(.394)	15.0(.591)	13.5(.531)
6	12.5(.492)	17.5(.689)	16.0(.630)
7	15.0(.591)	20.0(.787)	18.5(.728)
8	17.5(.689)	22.5(.886)	21.0(.827)
9	20.0(.787)	25.0(.984)	23.5(.925)
10	22.5(.886)	27.5(1.083)	26.0(1.024)
11	25.0(.984)	30.0(1.181)	28.5(1.122)
12	27.5(1.083)	32.5(1.280)	31.0(1.220)
13	30.0(1.181)	35.0(1.378)	33.5(1.319)
14	32.5(1.280)	37.5(1.476)	36.0(1.417)
15	35.0(1.378)	40.0(1.575)	38.5(1.516)
16	37.5(1.476)	42.5(1.673)	41.0(1.614)
17	40.0(1.575)	45.0(1.772)	43.5(1.713)
18	42.5(1.673)	47.5(1.870)	46.0(1.811)
19	45.0(1.772)	50.0(1.969)	48.5(1.909)
20	47.5(1.870)	52.5(2.067)	51.0(2.008)

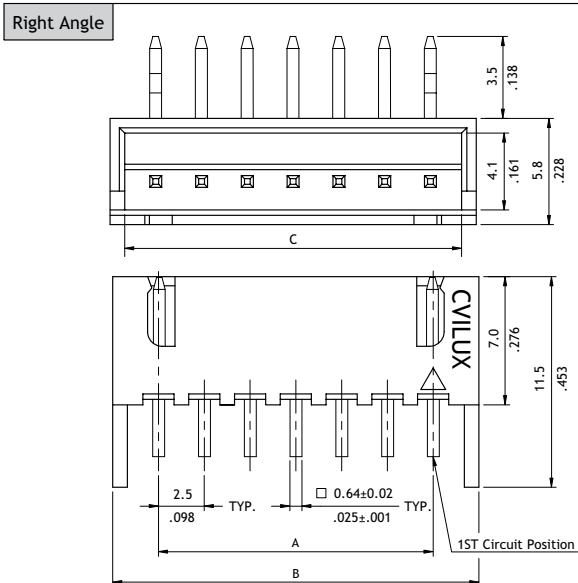

Recommended P.C. Board Layout


Ordering Code

① CI 22 ② 2 0 ③ P ④ 1 ⑤ V K 0 - ⑦ NH


- ① Series No.
 - ② No. of Circuits: 02 to 20
 - ③ P = DIP Type
 - ④ Plating Code: 1 = Matte Tin over Nickel
 - ⑤ Type: V = Straight
H = Right Angle
 - ⑥ Other Options:
00 = Without Pin Kinked
K0 = With Pin Kinked (Standard)
 - ⑦ -LF = For Lead Free soldering process
-NH = For Lead Free soldering process and Halogen-Free
- *Special options consult manufacturer

CI23 Series 2.50mm(.098") Wire to Board Connectors Housing & Terminal


- Low profile with locking ribs
- Mate with CI23 Header
- Can be used CI23 crimp clip terminal
- Terminal accommodated AWG #22 ~ #28
- Insulator: Nylon 66 UL 94V-2, Color Ivory
- Terminal: Tin plated Phosphor Bronze

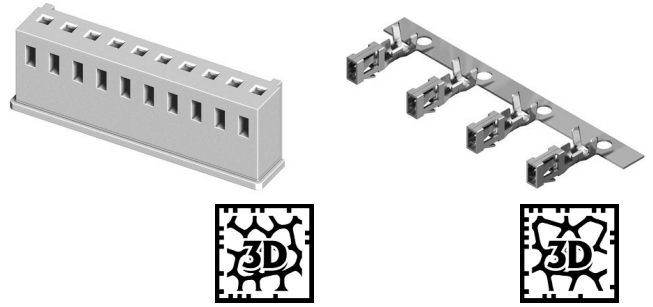


RoHS Compliant  

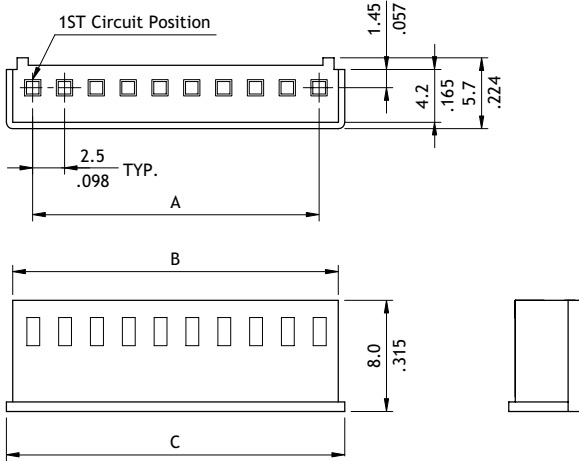

Circuits	Dimension		
	A	B	C
2	2.5(.098)	6.0(.236)	7.2(.283)
3	5.0(.197)	8.5(.335)	9.7(.382)
4	7.5(.295)	11.0(.433)	12.2(.480)
5	10.0(.394)	13.5(.531)	14.7(.579)
6	12.5(.492)	16.0(.630)	17.2(.677)
7	15.0(.591)	18.5(.728)	19.7(.776)
8	17.5(.689)	21.0(.827)	22.2(.874)
9	20.0(.787)	23.5(.925)	24.7(.972)
10	22.5(.886)	26.0(1.024)	27.2(1.071)
11	25.0(.984)	28.5(1.122)	29.7(1.169)
12	27.5(1.083)	31.0(1.220)	32.2(1.268)

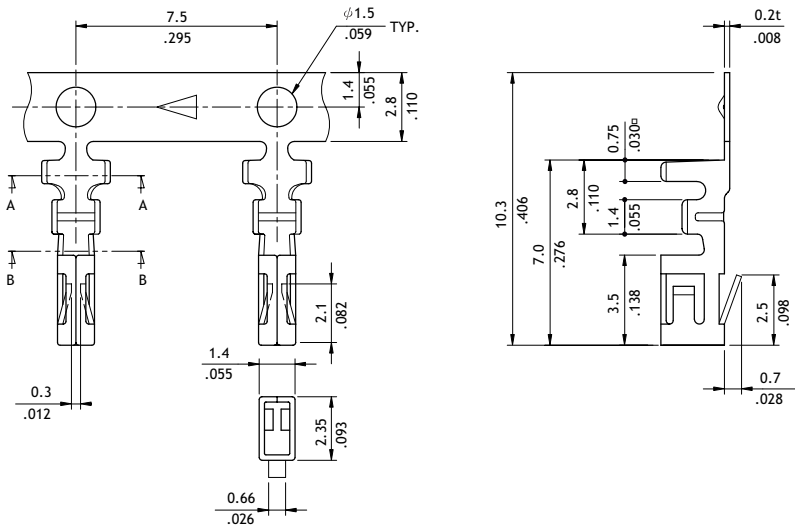

Wire Range	Insulation Diameter	Reel Q'ty
AWG #22-#28	1.9 (.075) MAX.	8,000 PCS



Ordering Code

1 CI23 **2** 12 **3** S **4** 0000


- ① Series No.
- ② No. of Circuits: 02 to 12
- ③ S = Housing
- ④ Other Options:
0000 = Standard
*Special options consult manufacturer

1 CI23 **2** T02 **3** 1 **4** P **5** E **6** 0


- ① Series No.
- ② Type: T02 = AWG #22 ~ #28
- ③ Plating Code: 1 = Tin over Nickel
- ④ Material: P = Phosphor Bronze
- ⑤ Plating Method: E = Pre-tinned
- ⑥ Other Options: 0 = Standard

CI23 Series 2.50mm(.098") Wire to Board Connectors DIP Headers

- With locking wall
- Mate with CI23 Housing
- Insulator: Nylon 66 UL 94V-2, Color Ivory
- With Tin plated 0.64mm square pin

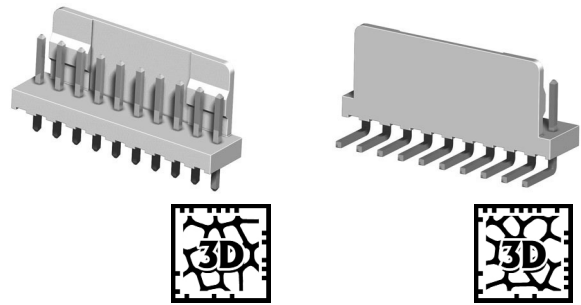

Straight


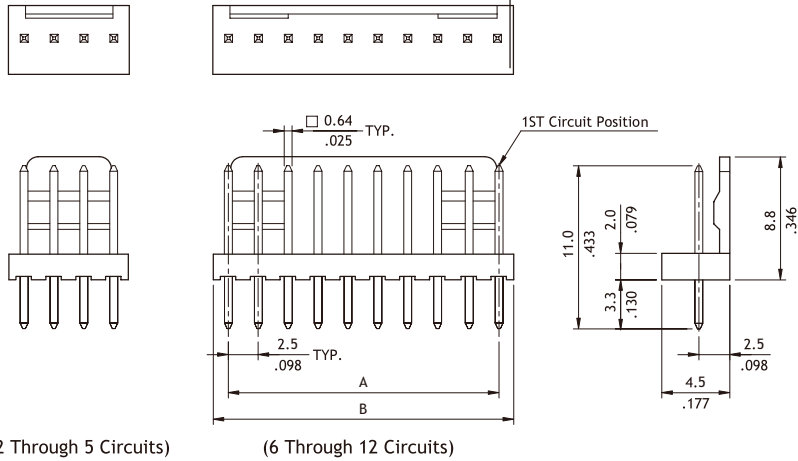


Circuits	Dimension	
	A	B
2	2.5(.098)	5.0(.197)
3	5.0(.197)	7.5(.295)
4	7.5(.295)	10.0(.394)
5	10.0(.394)	12.5(.492)
6	12.5(.492)	15.0(.591)
7	15.0(.591)	17.5(.689)
8	17.5(.689)	20.0(.787)
9	20.0(.787)	22.5(.886)
10	22.5(.886)	25.0(.984)
11	25.0(.984)	27.5(1.083)
12	27.5(1.083)	30.0(1.181)

(2 Through 5 Circuits)

(6 Through 12 Circuits)

Right Angle

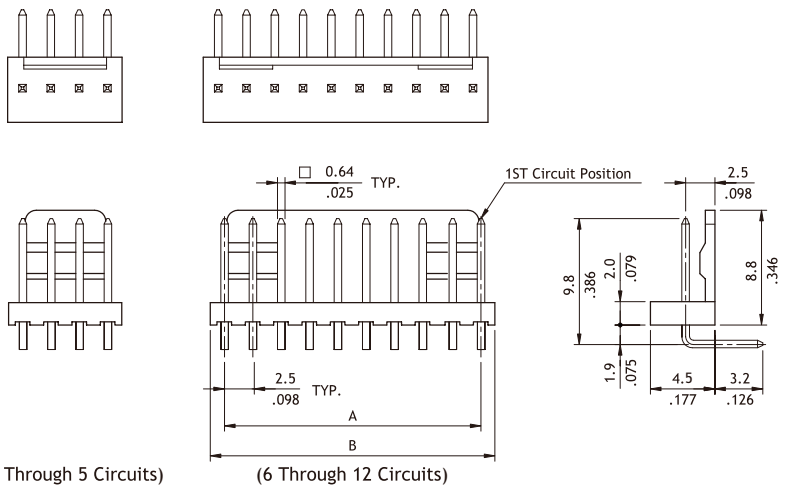

Recommended P.C. Board Layout

(2 Through 5 Circuits)

(6 Through 12 Circuits)


Ordering Code

① CI 23 ② 1 2 ③ P ④ 1 ⑤ V ⑥ 0 0



- ① Series No.
- ② No. of Circuits: 02 to 12
- ③ P = DIP Type
- ④ Plating Code:
1 = Tin over Nickel
- ⑤ Type: V = Straight
H = Right Angle
- ⑥ Other Options:
00 = Standard
*Special options consult manufacturer

CI25 Series 2.50mm(.098") Wire to Board Connectors Housing & Terminal



- Low profile with locking ribs
- Mate with CI25 Housing
- Can be used CI25 Crimp Clip Terminal
- Terminal accommodated AWG #22~ #28
- Insulator: Nylon 66 UL 94V-2, Color Ivory
- Terminal: Tin plated Phosphor Bronze

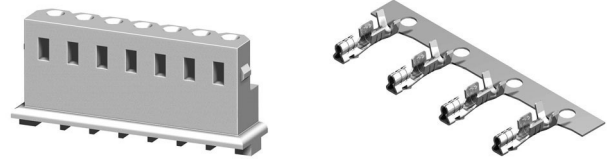



RoHS Compliant

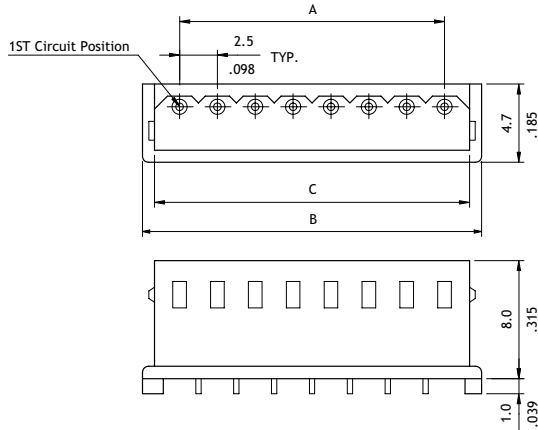

Circuits	Dimension		
	A	B	C
2	2.5(.098)	7.4(.291)	5.8(.228)
3	5.0(.197)	9.9(.390)	8.3(.327)
4	7.5(.295)	12.4(.488)	10.8(.425)
5	10.0(.394)	14.9(.587)	13.3(.524)
6	12.5(.492)	17.4(.685)	15.8(.622)
7	15.0(.591)	19.9(.783)	18.3(.720)
8	17.5(.689)	22.4(.882)	20.8(.819)
9	20.0(.787)	24.9(.980)	23.3(.917)
10	22.5(.886)	27.4(1.079)	25.8(1.016)
11	25.0(.984)	29.9(1.177)	28.3(1.114)
12	27.5(1.083)	32.4(1.276)	30.8(1.213)
13	30.0(1.181)	34.9(1.374)	33.3(1.311)
14	32.5(1.280)	37.4(1.472)	35.8(1.409)
15	35.0(1.378)	39.9(1.571)	38.3(1.508)

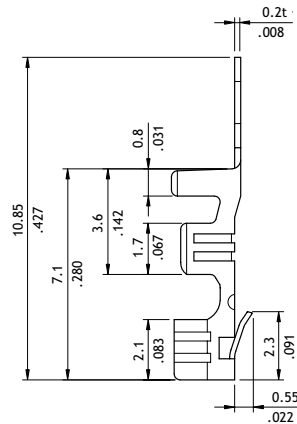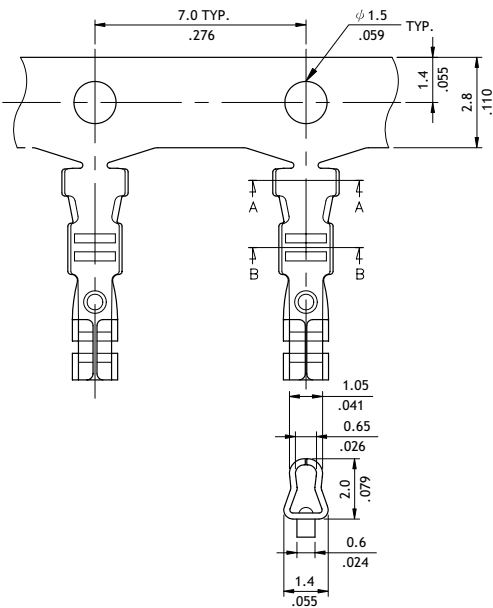

Wire Range	Insulation Diameter	Reel Q'ty
AWG #22-#28	1.6 (.063) MAX.	10,000 PCS.



Ordering Code

1 CI25 **2** 15 **3** S **4** 0000


- 1** Series No.
- 2** No. of Circuits: 02 to 15
- 3** S = Housing
- 4** Other Options:
0000 = Standard
*Special options consult manufacturer

1 CI25 **2** T02 **3** 1 **4** P **5** E **6** 0


- 1** Series No.
- 2** Type: T02 = AWG #22 ~ #28
- 3** Plating Code: 1 = Tin over Nickel
- 4** Material: P = Phosphor Bronze
- 5** Plating Method: E = Pre-tinned
- 6** Other Options: 0 = Standard

CI25 Series 2.50mm(.098") Wire to Board Connectors DIP Headers


- With locking slot
- Mate with CI25 Housing
- Insulator: Polyamide UL 94V-0, Color Nature
- With Tin plated 0.7mm round pin

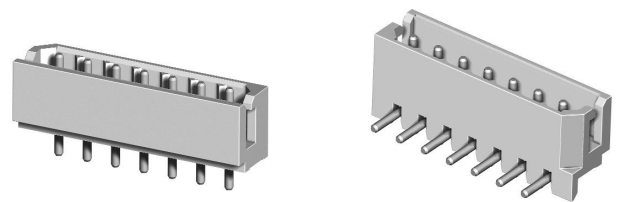

Straight

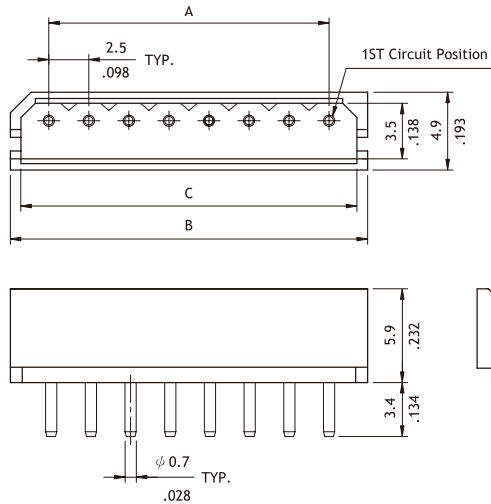


A = 2.5 x No. of Spaces
 B = A + 5.0
 C = A + 3.6




Recommended P.C. Board Layout

Right Angle

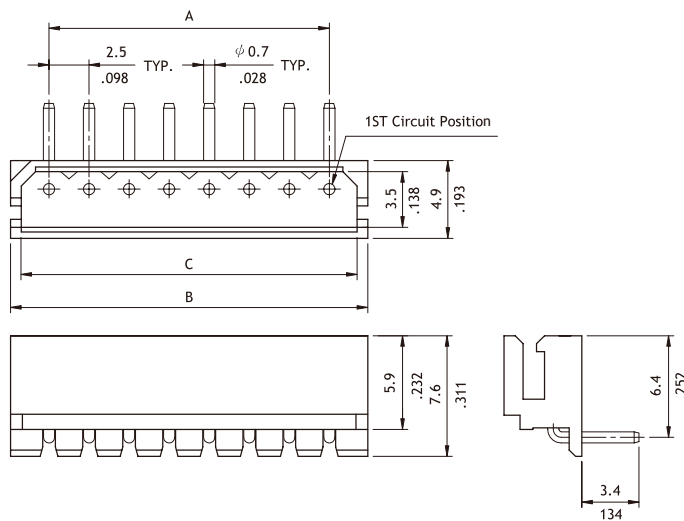

A = 2.5 x No. of Spaces
 B = A + 5.0
 C = A + 3.6



Recommended P.C. Board Layout

Ordering Code





1 CI **2** 5 **2** **1** 5 **3** P **4** 1 **5** V **6** 0 0 - **7** NH

- 1** Series No.
- 2** No. of Circuits: 02 to 15
- 3** P = DIP Type
- 4** Plating Code: 1 = Matte Tin over Nickel
- 5** Type: V = Straight
H = Right Angle



- 6** Other Options:
00 = Standard
*Special options consult manufacturer
- 7** -LF = For Lead Free soldering process
-NH = For Lead Free soldering process and Halogen-Free

CI26 Series 2.50mm(.098") Board In Connectors



- Mate with CI25 Housing
- Can be used CI25 Crimp Clip Terminal
- Terminal accommodated AWG #22~ #28
- Insulator: Nylon 66 UL 94V-0, Color Ivory
- Terminal: Tin plated Phosphor Bronze

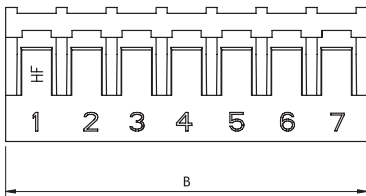

Circuits	Dimension	
	A	B
2	2.5(.098)	5.6(.220)
3	5.0(.197)	8.1(.389)
4	7.5(.295)	10.6(.417)
5	10.0(.394)	13.1(.516)
6	12.5(.492)	15.6(.614)
7	15.0(.591)	18.1(.713)
8	17.5(.689)	20.6(.811)
9	20.0(.787)	23.1(.909)
10	22.5(.886)	25.6(1.008)
11	25.0(.984)	28.1(1.106)
12	27.5(1.083)	30.6(1.205)
13	30.0(1.181)	33.1(1.303)
14	32.5(1.280)	35.6(1.402)
15	35.0(1.378)	38.1(1.598)
16	37.5(1.476)	40.6(1.598)

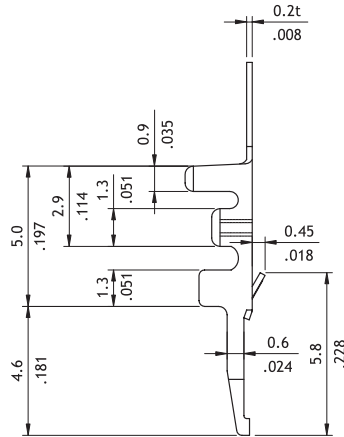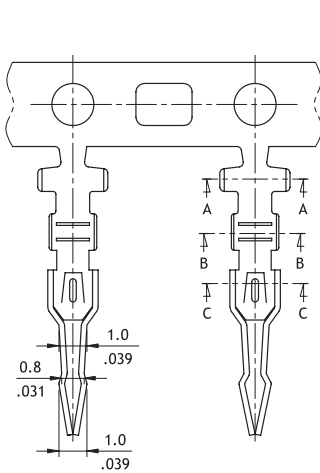

Wire Range	Insulation Diameter	Reel Q'ty
AWG #22-#26	1.6 (.063) MAX.	10,000 PCS

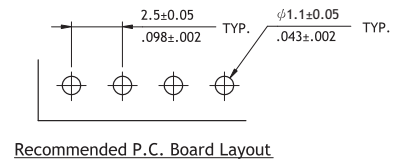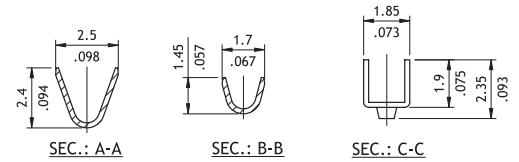

Ordering Code

1 **2** **3** **4**
CI26 16 S 0000





- 1 Series No.
- 2 No. of Circuits: 02 to 16
- 3 S = Housing
- 4 Other Options:
0000 = Standard
*Special options consult manufacturer

1 **2** **3** **4** **5**
CI26 T02 1 P E0


- 1 Series No.
- 2 Type: T02 = AWG #22 ~ #26
- 3 Plating Code: 1 = Tin over Nickel
- 4 Material: P = Phosphor Bronze
- 5 Other Options: E0 = Standard

CI27 Series 2.50mm(.098") Board In Connectors


- Low profile with locking ribs
- Can be used CI27 Crimp Board in Terminal
- Terminal accommodated AWG #22 ~ #26
- Insulator: Nylon 66 UL 94V-0, Color Nature
- Terminal: Tin plated Phosphor Bronze

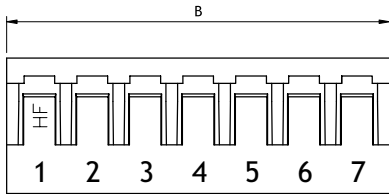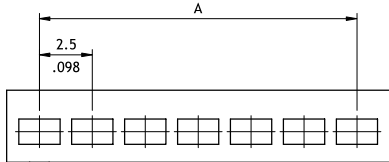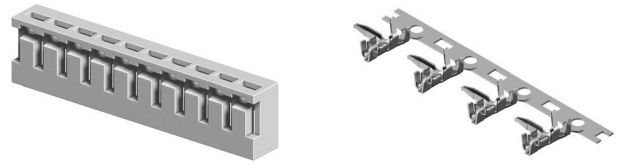


Circuits	Dimension	
	A	B
2	2.5(.098)	5.7(.224)
3	5.0(.197)	8.2(.323)
4	7.5(.295)	10.7(.421)
5	10.0(.394)	13.2(.520)
6	12.5(.492)	15.7(.618)
7	15.0(.591)	18.2(.717)
8	17.5(.689)	20.7(.815)
9	20.0(.787)	23.2(.913)
10	22.5(.886)	25.7(1.012)
11	25.0(.984)	28.2(1.110)
12	27.5(1.083)	30.7(1.209)
13	30.0(1.181)	33.2(1.307)
14	32.5(1.280)	35.7(1.406)
15	35.0(1.378)	38.2(1.504)
16	37.5(1.476)	40.6(1.598)

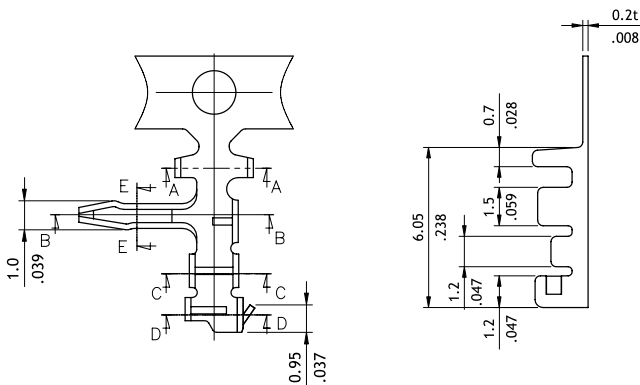


Wire Range	Insulation Diameter	Reel Qty
AWG #22-#26	1.6 (.063) MAX.	7,000 PCS




Recommended P.C. Board Layout




SEC.: A-A




SEC.: B-B



SEC.: C-C



SEC.: D-D



SEC.: E-E

Ordering Code

1 CI27 **2** 16 **3** S **4** 0000

- ① Series No.
- ② No. of Circuits: 02 to 16
- ③ S = Housing
- ④ Other Options:
0000 = Standard




*Special options consult manufacturer

1 CI27 **2** T02 **3** 1 **4** P **5** EH



- ① Series No.
- ② Type: T02 = AWG #22 ~ #26
- ③ Plating Code: 1 = Tin over Nickel
- ④ Material: P = Phosphor Bronze
- ⑤ Other Options: EH = Right Angle Terminal

CI91 Series 2.50mm(.098") Straight Wire Holder Connectors

- Low cost
- With retaining PCB pegs
- Insulator: Nylon 66 UL 94V-0, Color Nature
- Accommodated AWG #24 ~ #26 cables

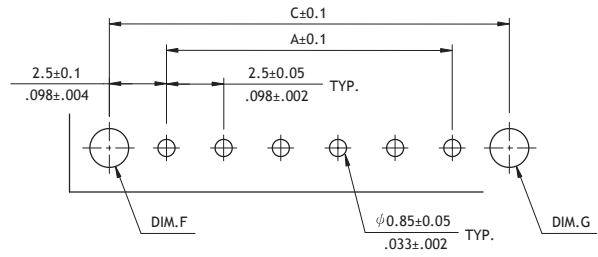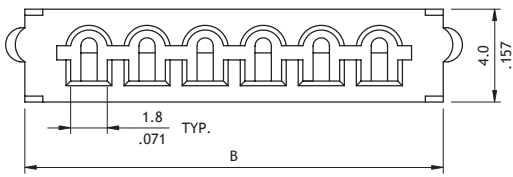

Recommended P.C. Board Layout

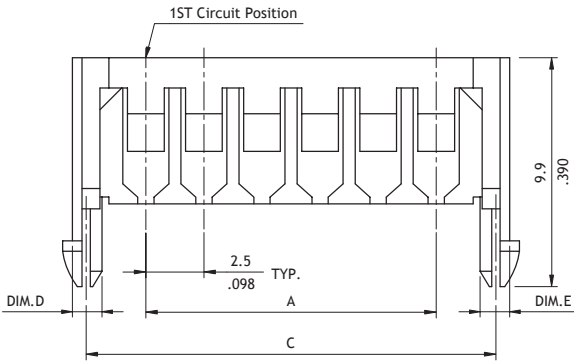

A = 2.5 * No. of Spaces
 B = A + 5.3
 C = A + 5.0

ACCOMMODATED WIRE SIZE: AWG#24-#26
Stripped Flat Cable
P/N: CI91**SA00*

Ordering Code

① CI 91 ② 06 ③ SA ④ 000





- ① Series No.
- ② No. of Circuits: 03, 06
- ③ Connector Style:
SA = For Stripped Flat Cable

- ④ Other Options:
000 = D = 1.60, E = 1.60,
F = 1.75, G = 1.75



CI39 Series 2.54mm(.100") Wire to Board Connectors SMT Headers

- ⊙ Locking wall provide secure mating
- ⊙ With PAD for SMT Line pick and place machine
- ⊙ Insulator: High temperature plastic UL 94V-0, Color Nature
- ⊙ With Tin plated SMT type contact

RoHS Compliant   

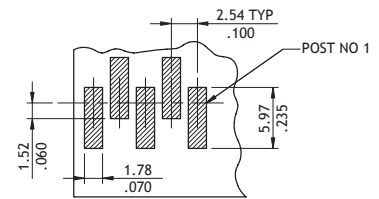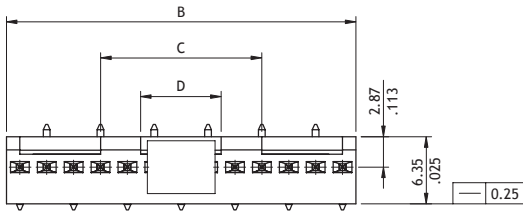

Recommended P.C. Board Layout

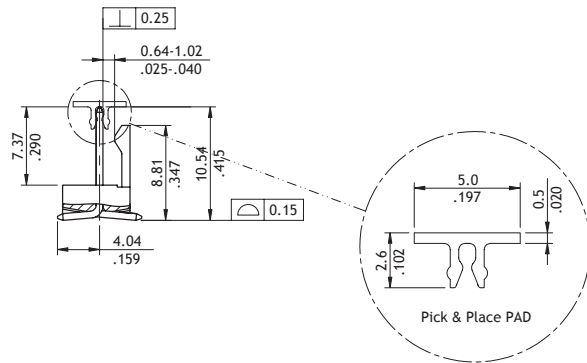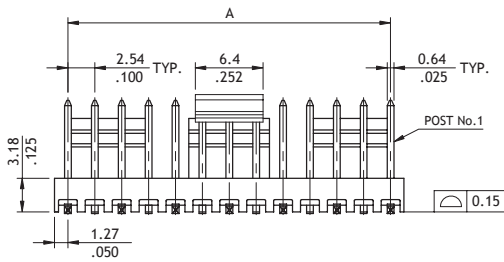

A = 2.54 x No. of Spaces
 B = A + 2.54
 C = A - 15.24 (Only for 8-18P)

Circuit	DIM. D
2-11P	-
12-13P	7.62(.300)
14-18P	12.70(.500)


Ordering Code

① CI 39 ② 04 ③ M ④ 1 ⑤ V ⑥ R ⑦ 0 - ⑧ NH

- ① Series No.
- ② No. of Circuits: 02 to 18 (Available: 03, 04)
- ③ M = SMT Type
- ④ Plating Code:
1 = Matte Tin over Nickel
- ⑤ Type: V = Straight
- ⑥ Packing Options:
Tape & Reel
- ⑦ Other Options:
0 = Standard
- ⑧ -NH = For Lead Free IR process and Halogen-Free

CID2 Series 2.54mm(.100") IDC Type Connectors

- Terminal: Tin-plated Phosphor Bronze
- Housing: UL 94V-2 Nylon 66
- With or without locking ramp and polarizing tabs
- Feed-Thru and Closed End type
- Wire range AWG #22 ~ #28 (Flat ribbon wire)
- Mate with CI31 Headers




NEW




RoHS Compliant



Closed End type
Without Polarizing Tabs

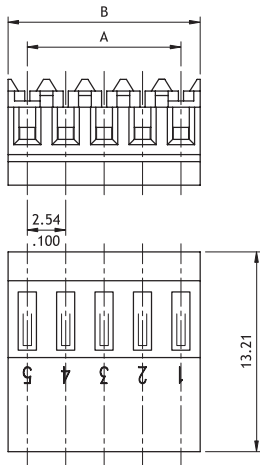



$A = 2.54 \times \text{No. of Spaces}$
 $B = A + 2.54$





Closed End type
With Polarizing Tabs

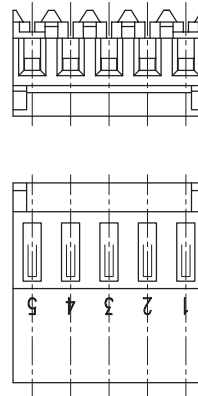

Feed-Thru type
With Polarizing Tabs

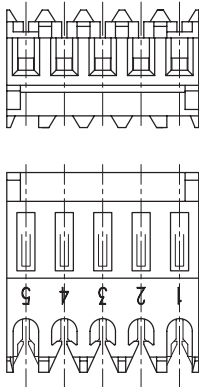

Feed-Thru type
Without Polarizing Tabs

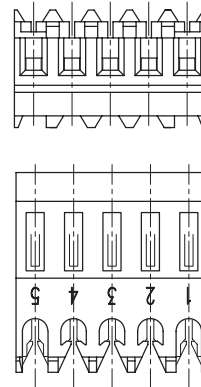


Ordering Code

① **C** ② **I** ③ **D** ④ **2** ⑤ **S** ⑥ **1** ⑦ **A** ⑧ **0** ⑨ **0**


- ① Series No.
- ② No. of Circuits: 02 to 24
- ③ S = Housing
- ④ Plating Code: 1 = Tin plated over Nickel
- ⑤ Type: A = Closed End Type
B = Feed-Thru Type
- ⑥ Color Options:
0 = Color white, for AWG #22
3 = Color red, for AWG #24
6 = Color green, for AWG #26
7 = Color blue, for AWG #28
- ⑦ Other Options: 0 = W/O Polarizing Tabs
P = With Polarizing Tabs

CI88 Series 2.54mm(.100") Pin Headers


- With locking wall
- Insulation: Nylon 66 UL 94V-0, Color Nature

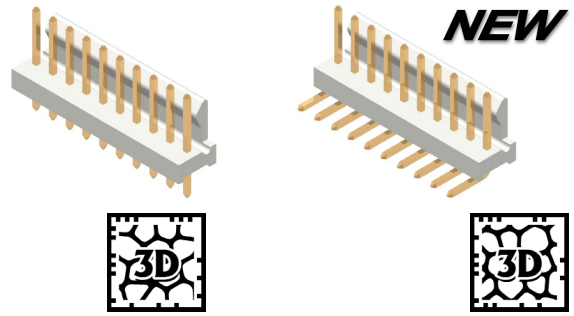

Straight

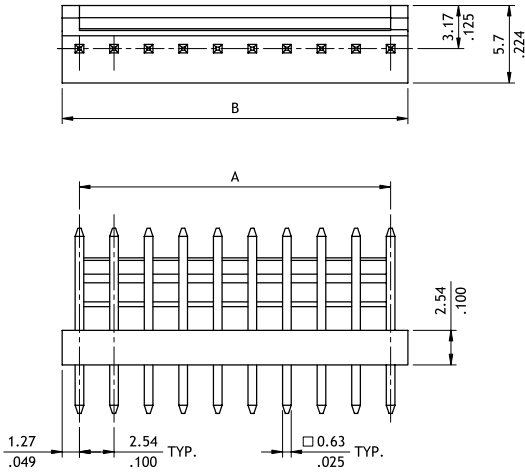


A = 2.54 x No. of Spaces
B = A + 2.54




Recommended P.C. Board Layout

Right Angle

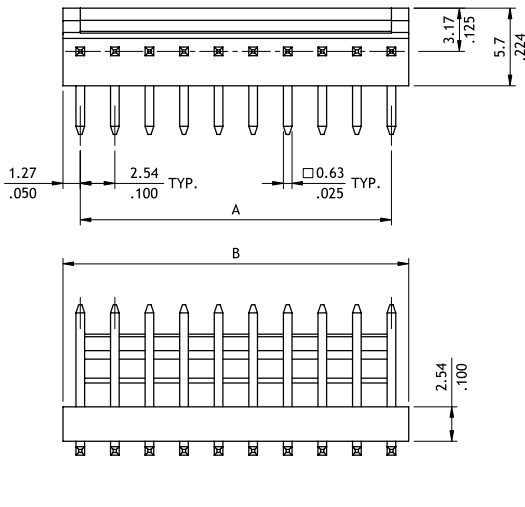

A = 2.54 x No. of Spaces
B = A + 2.54



Recommended P.C. Board Layout


Ordering Code

1 CI **2** 88 **3** P **4** 1 **5** V **6** 00 - **7** NH



- 1** Series No.
- 2** No. of Circuits: 02 to 28
- 3** P = DIP Header
- 4** Plating Code:
1 = Matte Tin over Nickel
2 = Gold flash plated over Nickel
- 5** Type: V = Straight
H = Right Angle
- 6** Other Options: 00 = Standard
- 7** -NH = For Lead Free soldering process and Halogen-Free

CI31 Series 2.54mm(.100") Wire to Board Connectors Housing & Terminal


- With locking ramps and ribs
- Mate with CI31, CH31, CI83 header
- Can be used CI31 crimp clip terminal
- Insulator: Nylon 66 UL 94V-2, Color Ivory
- Terminal: Tin plated Brass or Phosphor Bronze





RoHS Compliant

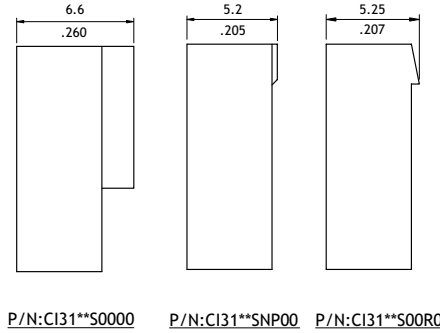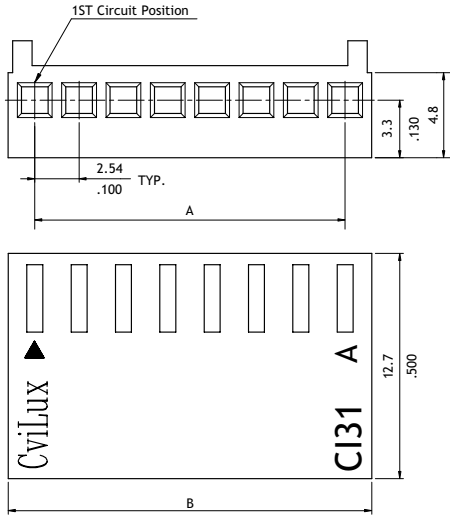

Circuits	Dimension	
	A	B
2	2.54(.100)	5.6(.220)
3	5.08(.200)	8.1(.319)
4	7.62(.300)	10.7(.421)
5	10.16(.400)	13.2(.520)
6	12.70(.500)	15.8(.622)
7	15.24(.600)	18.3(.720)
8	17.78(.700)	20.8(.819)
9	20.32(.800)	23.4(.921)
10	22.86(.900)	25.9(1.020)
11	25.40(1.000)	28.5(1.122)
12	27.94(1.100)	31.0(1.220)
13	30.48(1.200)	33.5(1.319)
14	33.02(1.300)	36.1(1.421)
15	35.56(1.400)	38.6(1.520)
16	38.10(1.500)	41.2(1.622)
17	40.64(1.600)	43.7(1.720)
18	43.18(1.700)	46.2(1.819)
19	45.72(1.800)	48.8(1.921)
20	48.26(1.900)	51.3(2.020)

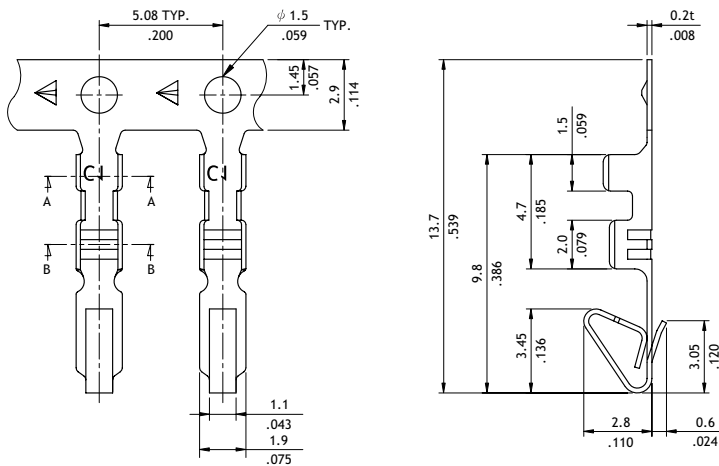

Wire Range	Insulation Diameter	Reel Qty
AWG #22-#28	1.5 (.059) MAX.	10,000 PCS.



Ordering Code

① CI31 ② 20 ③ S ④ 0000


- ① Series No.
- ② No. of Circuits: 02 to 20
- ③ S = Housing
- ④ Other Options:
0000 = With Polarizing Ribs (Long)
00R0 = With Polarizing Ribs (Short)
NP00 = Without Polarizing Rib
*Special options consult manufacturer

① CI31 ② T02 ③ 1 ④ B ⑤ E ⑥ 0


- ① Series No.
- ② Type: T02 = AWG #22 ~ #28
- ③ Plating Code: 1 = Tin over Nickel
- ④ Material: B = Brass
P = Phosphor Bronze
- ⑤ Plating Method: E = Pre-tinned
- ⑥ Other Options: 0 = Standard

CI31 Series 2.54mm(.100") Wire to Board Connectors DIP Headers

- With locking ramps and ribs
- Mate with CI31 Housing
- Insulator: High temperature plastic UL 94V-0, Color Nature
- Terminal: Matte Tin plated Brass

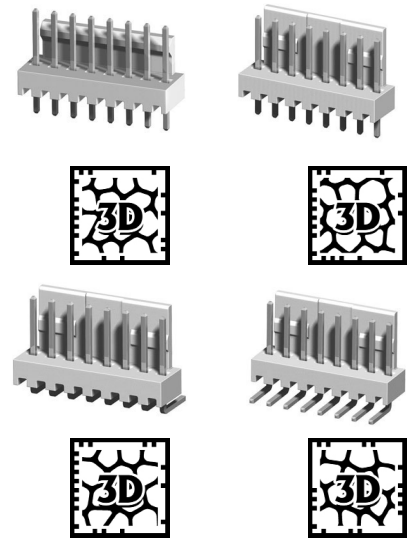


P/N CI31**P1V0L-NH

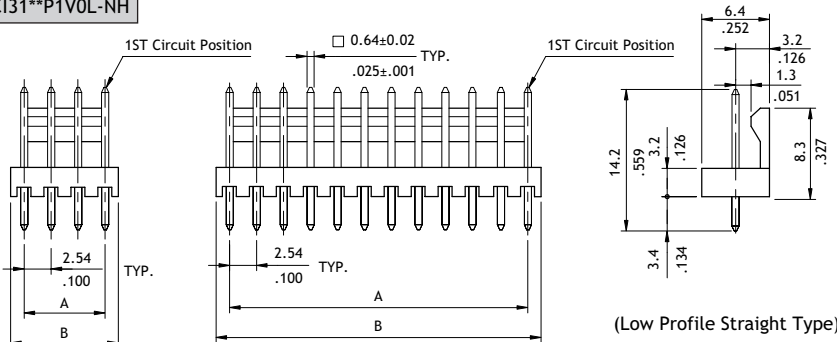


(2 through 5 circuits) (6 through 20 circuits)

P/N CI31**P1V00-NH

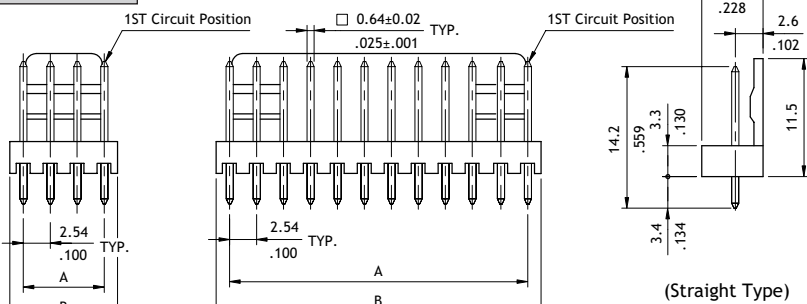


(2 through 5 circuits) (6 through 20 circuits)

P/N CI31**P1H00-NH

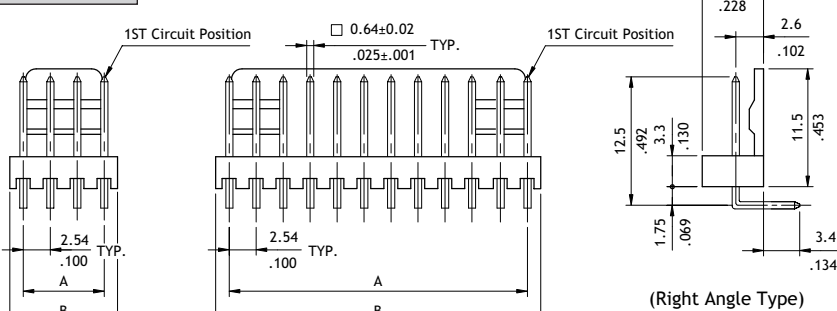


(2 through 5 circuits) (6 through 20 circuits)

P/N CI31**P1Y00-NH

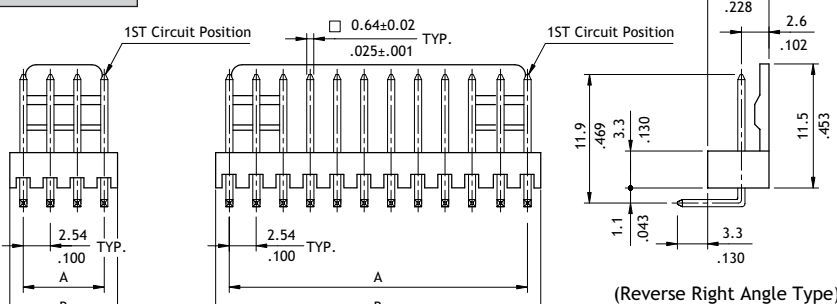

(2 through 5 circuits) (6 through 20 circuits)


Circuits	Dimension	
	A	B
2	2.54(.100)	5.1(.201)
3	5.08(.200)	7.6(.299)
4	7.62(.300)	10.2(.402)
5	10.16(.400)	12.7(.500)
6	12.70(.500)	15.2(.598)
7	15.24(.600)	17.8(.701)
8	17.78(.700)	20.3(.799)
9	20.32(.800)	22.9(.902)
10	22.86(.900)	25.4(1.000)
11	25.40(1.000)	27.9(1.098)
12	27.94(1.100)	30.5(1.201)
13	30.48(1.200)	33.0(1.299)
14	33.02(1.300)	35.6(1.402)
15	35.56(1.400)	38.1(1.500)
16	38.10(1.500)	40.6(1.598)
17	40.64(1.600)	43.2(1.701)
18	43.18(1.700)	45.7(1.799)
19	45.72(1.800)	48.3(1.902)
20	48.26(1.900)	50.8(2.000)





Recommended P.C. Board Layout

CI32 Series 2.54mm(.100") Wire to Board Connectors Housing & Terminal


- Mate with CH31, CH34 Header
- Can be used CI32 crimp clip terminal
- Insulator: Nylon 66 UL 94V-1, Color Black
- Terminal: Tin or Gold flash plated Brass or Phosphor Bronze




RoHS Compliant

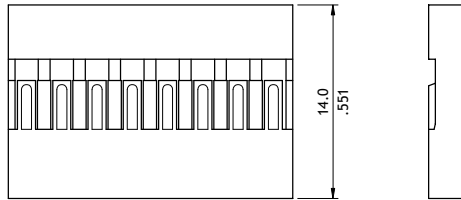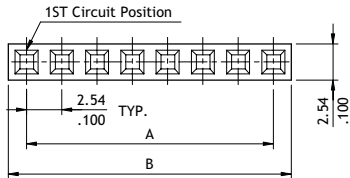


Circuits	Dimension		Circuits	Dimension	
	A	B		A	B
1	----	2.8(.110)	21	50.80(2.000)	53.6(2.110)
2	2.54(.100)	5.3(.209)	22	53.34(2.100)	56.2(2.213)
3	5.08(.200)	7.8(.307)	23	55.88(2.200)	58.7(2.311)
4	7.62(.300)	10.4(.410)	24	58.42(2.300)	61.3(2.413)
5	10.16(.400)	12.9(.508)	25	60.96(2.400)	63.8(2.512)
6	12.70(.500)	15.4(.606)	26	63.50(2.500)	66.3(2.610)
7	15.24(.600)	18.0(.709)	27	66.04(2.600)	68.9(2.713)
8	17.78(.700)	20.5(.807)	28	68.58(2.700)	71.4(2.811)
9	20.32(.800)	23.1(.909)	29	71.12(2.800)	74.0(2.913)
10	22.86(.900)	25.6(1.008)	30	73.66(2.900)	76.5(3.012)
11	25.40(1.000)	28.1(1.106)	31	76.20(3.000)	79.0(3.110)
12	27.94(1.100)	30.7(1.209)	32	78.74(3.100)	81.6(3.213)
13	30.48(1.200)	33.2(1.307)	33	81.28(3.200)	84.1(3.311)
14	33.02(1.300)	35.8(1.409)	34	83.82(3.300)	86.7(3.413)
15	35.56(1.400)	38.3(1.508)	35	86.36(3.400)	89.2(3.512)
16	38.10(1.500)	40.8(1.606)	36	88.90(3.500)	91.7(3.610)
17	40.64(1.600)	43.4(1.709)	37	91.44(3.600)	94.3(3.713)
18	43.18(1.700)	45.9(1.807)	38	93.98(3.700)	96.8(3.811)
19	45.72(1.800)	48.5(1.909)	39	96.52(3.800)	99.4(3.913)
20	48.26(1.900)	51.1(2.012)	40	99.06(3.900)	101.9(4.012)

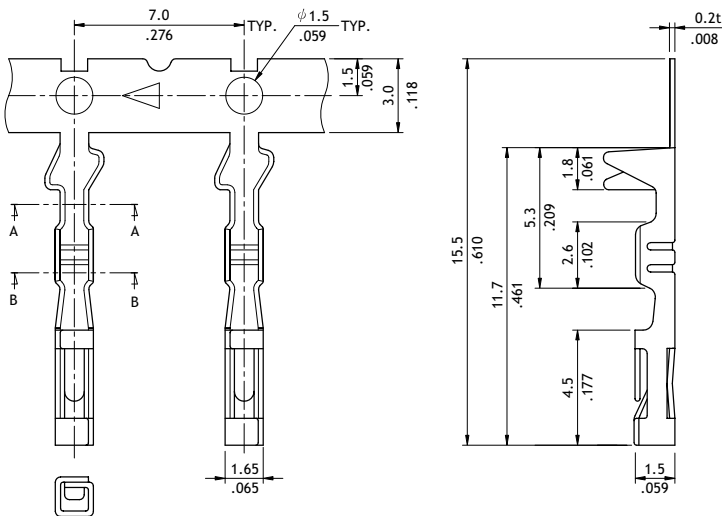

Wire Range	Insulation Diameter	Reel Qty
AWG #22-#28	1.7 (.067) MAX.	10,000 PCS



SEC.: A-A



SEC.: B-B

Ordering Code

1 **2** **3** **4**
CI32 40 S 0010



- ① Series No.
- ② No. of Circuits: 02 to 40
- ③ S = Housing
- ④ Other Options:
0010 = Color Black
*Special options consult manufacturer

1 **2** **3** **4** **5** **6**
CI32 T02 A B E 0

- ① Series No.
- ② Type: T02 = AWG #22 ~ #28
- ③ Plating Code: 1 = Tin over Nickel
A = Selective Gold flash over Nickel
- ④ Material: B = Brass ; P = Phosphor Bronze
- ⑤ Plating method: E = Pre-tinned ; P = Post Plating
- ⑥ Single contact retention force:
0 = More than 20 circuits
M = Less than 21 circuits

CI34 Series 2.54mm(.100") Dual Row Wire to Board Connectors Housing

- ⊙ With polarizing rib
- ⊙ Mate with CH81, CH84, and CH87 Header
- ⊙ Can be used with CI32 crimp clip terminal
- ⊙ Insulator: Nylon 66 UL 94V-1, Color Black

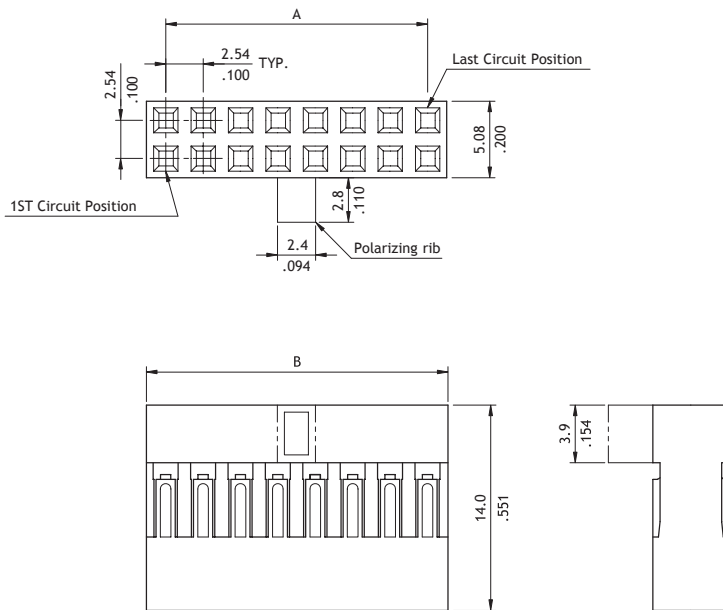

Circuits	Dimension	
	A	B
4	2.54(.100)	5.1(.201)
6	5.08(.200)	7.6(.299)
8	7.62(.300)	10.2(.402)
10	10.16(.400)	12.7(.500)
12	12.70(.500)	15.2(.598)
14	15.24(.600)	17.8(.701)
16	17.78(.700)	20.3(.799)
18	20.32(.800)	22.9(.902)
20	22.86(.900)	25.4(1.000)
22	25.40(1.000)	27.9(1.098)
24	27.94(1.100)	30.5(1.201)
26	30.48(1.200)	33.0(1.299)
28	33.02(1.300)	35.6(1.402)
30	35.56(1.400)	38.1(1.500)
32	38.10(1.500)	40.6(1.598)
34	40.64(1.600)	43.2(1.701)
36	43.18(1.700)	45.7(1.799)
38	45.72(1.800)	48.3(1.902)
40	48.26(1.900)	50.8(2.000)



Ordering Code

①
CI34
②
40
③
S
④
0010



- ① Series No.
- ② No. of Circuits: 04 to 40
- ③ S = Housing
- ④ Other Options:
 - 0010 = Color Black, Without Polarizing Rib
 - 001A = Color Black, With Polarizing Rib
 - *Special options consult manufacturer

CI33 Series 2.54mm(.100") Single Row Wire to Board Connectors Housing


- With positive locking ribs and latch
- Mate with CI33 Headers
- Can be used with CI33 crimp clip terminal
- Insulator: Glass filled polyester UL 94V-0, Color Black

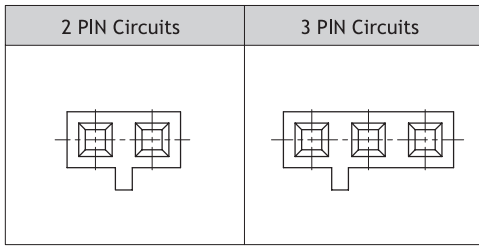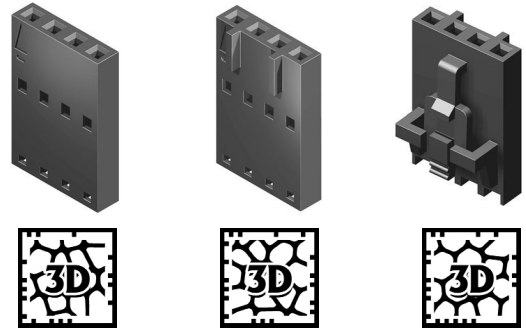


Circuits	Dimension	
	A	B
2	2.54(.100)	5.2(.205)
3	5.08(.200)	7.7(.303)
4	7.62(.300)	10.3(.406)
5	10.16(.400)	12.8(.504)
6	12.70(.500)	15.2(.598)
7	15.24(.600)	17.9(.705)
8	17.78(.700)	20.4(.803)
9	20.32(.800)	23.0(.906)
10	22.86(.900)	25.5(1.004)
11	25.40(1.000)	28.0(1.102)
12	27.94(1.100)	30.6(1.205)
13	30.48(1.200)	33.1(1.303)
14	33.02(1.300)	35.7(1.406)
15	35.56(1.400)	38.2(1.504)
16	38.10(1.500)	40.7(1.602)
17	40.64(1.600)	43.3(1.705)
18	43.18(1.700)	45.8(1.803)

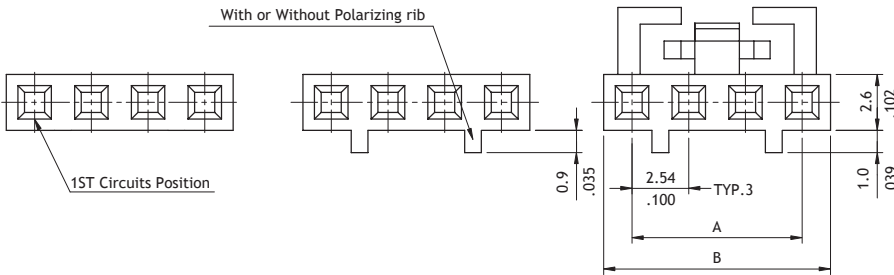


P/N:CI33**SNR10



P/N:CI33**S0R10



P/N:CI33**S0010

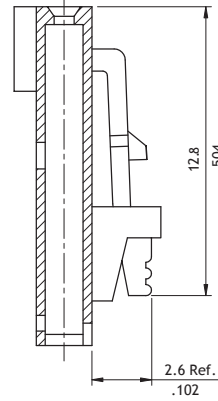


Ordering Code

① CI33 **②** 18 **③** S00 **④** 10




- ①** Series No.
- ②** No. of Circuits: 02 to 18
- ③** Type:
 - S00 = With latch and locking ribs
 - S0R = With polarizing ribs housing
 - SNR = Without latch and locking rib
- ④** Other Options
 - 10 = Color Black (Standard)

CI33 Series 2.54mm(.100") Single Row Wire to Board DIP Headers





- Box type with locking slot
- Mate with CI33 Single Row Housing
- Insulator: Glass filled polyester UL 94V-0, Color Black
- With Tin plated 0.64mm square pin



RoHS Compliant

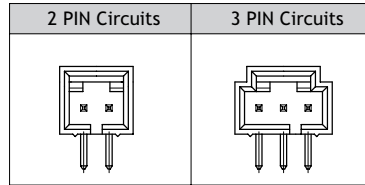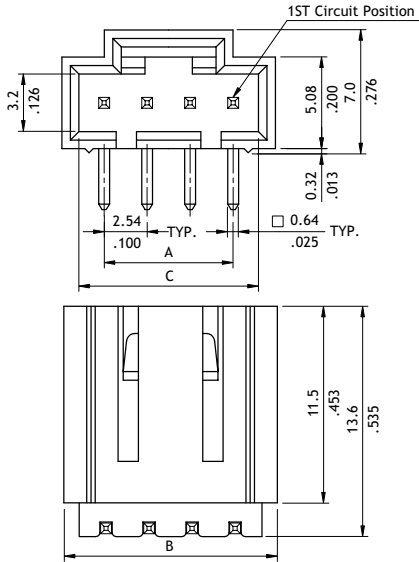

Circuits	Dimension		
	A	B	C
2	2.54(.100)	7.6(.299)	5.52(.217)
3	5.08(.200)	10.2(.402)	8.06(.317)
4	7.62(.300)	12.7(.500)	10.6(.417)
5	10.16(.400)	15.3(.602)	13.14(.517)
6	12.7(.500)	17.8(.701)	15.68(.617)
7	15.24(.600)	20.3(.799)	18.22(.717)
8	17.78(.700)	22.9(.902)	20.76(.817)
9	20.32(.800)	25.4(1.000)	23.3(.917)
10	22.86(.900)	28.0(1.102)	25.84(1.017)
11	25.4(1.000)	30.5(1.201)	28.38(1.117)
12	27.94(1.100)	33.0(1.299)	30.92(1.217)
13	30.48(1.200)	35.6(1.402)	33.46(1.317)
14	33.02(1.300)	38.1(1.500)	36.0(1.417)
15	35.56(1.400)	40.7(1.602)	38.54(1.517)
16	38.1(1.500)	43.2(1.701)	41.08(1.617)
17	40.64(1.600)	45.7(1.799)	43.62(1.717)
18	43.18(1.700)	48.3(1.902)	46.16(1.817)

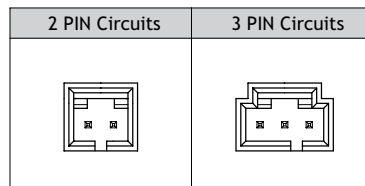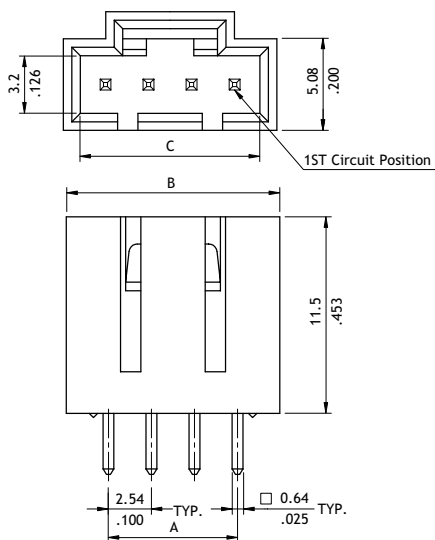

Recommended P.C. Board Layout


Ordering Code

① CI 33 ② 1 8 ③ P ④ 1 ⑤ V ⑥ 1 0


- ① Series No.
- ② No. of Circuits: 02 to 18
- ③ P = DIP Header
- ④ Plating Code:
1 = Tin over Nickel
2 = Gold flash over Nickel
- ⑤ Type: V = Straight
H = Right Angle
- ⑥ Other Options:
10 = Color Black (Standard)
*Special options consult manufacturer

CI33 Series 2.54mm(.100") Dual Row Wire to Board Connectors


- With positive locking latch
- Mate with CH81, CH84, and CH87 Header
- Can be used CI33 crimp clip terminal
- Insulator: Glass filled polyester UL 94V-0, Color Black
- With Tin plated Phosphor Bronze

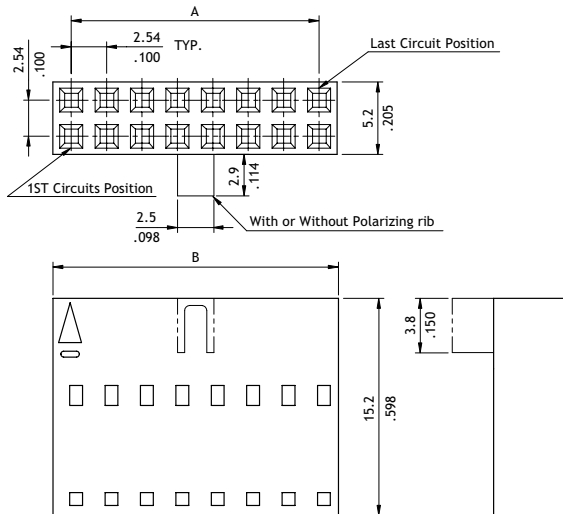


Circuits	Dimension		Circuits	Dimension	
	A	B		A	B
4	2.54(.100)	5.2(.205)	34	40.64(1.600)	43.3(1.705)
6	5.08(.200)	7.7(.303)	36	43.18(1.700)	45.9(1.807)
8	7.62(.300)	10.3(.406)	38	45.72(1.800)	48.4(1.906)
10	10.16(.400)	12.8(.504)	40	48.26(1.900)	50.9(2.004)
12	12.7(.500)	15.4(.606)	42	50.8(2.000)	53.5(2.106)
14	15.24(.600)	17.9(.705)	44	53.34(2.100)	56.0(2.205)
16	17.78(.700)	20.5(.807)	46	55.88(2.200)	58.6(2.307)
18	20.32(.800)	23.0(.906)	48	58.42(2.300)	61.1(2.406)
20	22.86(.900)	25.5(1.004)	50	60.96(2.400)	63.6(2.504)
22	25.4(1.000)	28.1(1.106)	52	63.5(2.500)	66.2(2.606)
24	27.94(1.100)	30.6(1.205)	54	66.04(2.600)	68.7(2.705)
26	30.48(1.200)	33.2(1.307)	56	68.58(2.700)	71.3(2.807)
28	33.02(1.300)	35.7(1.406)	58	71.12(2.800)	73.8(2.906)
30	35.56(1.400)	38.2(1.504)	60	73.66(2.900)	76.3(3.006)
32	38.1(1.500)	40.8(1.606)			

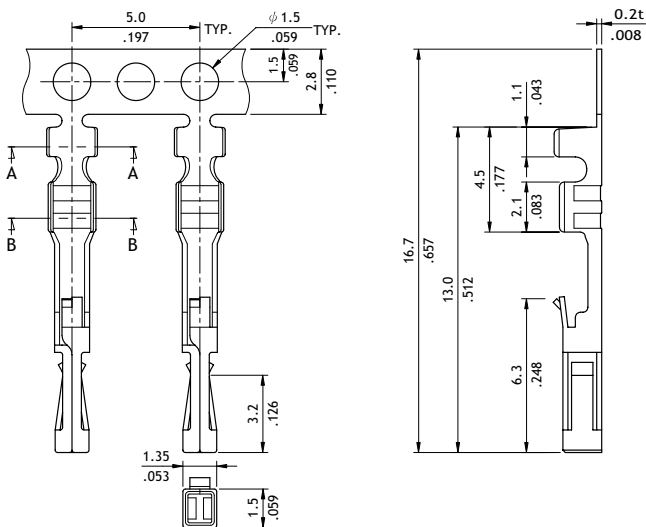

Wire Range	Insulation Diameter	Reel Qty
AWG #22-#28	1.7 (.067) MAX.	15,000 PCS.



SEC.: A-A



SEC.: B-B

Ordering Code

1 CI33 **2** 60 **3** S **4** 0D10

- 1** Series No.
- 2** No. of Circuits: 04 to 60
- 3** S = Housing
- 4** Other Options:
 0D10 = Without Polarizing Rib
 0D1A = With Polarizing Rib
 *Special options consult manufacturer

1 CI33 **2** T02 **3** 1 **4** P **5** E **6** 0




- 1** Series No.
- 2** Type: T02 = AWG #22 ~ #28
- 3** Plating Code: 1 = Tin over Nickel
- 4** Material: P = Phosphor Bronze
- 5** Plating Method: E = Pre-tinned
- 6** Other Options: 0 = Standard

CI35 Series 2.54mm(.100") Wire to Board Connectors

- Housing with locking Ribs
- Header with locking wall
- Can be used CI35 crimp clip terminal
- Insulator: Nylon 66 UL 94V-0, Color Nature
- With Tin plated 0.64mm square pin
- Terminal: Tin plated Brass, Phosphor Bronze


RoHS Compliant

P/N CI3504S0000

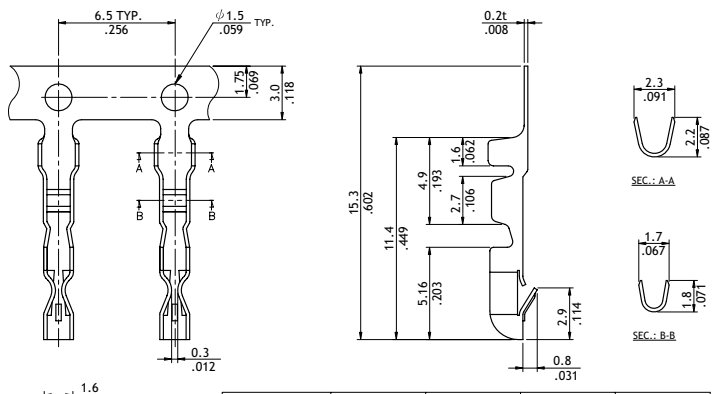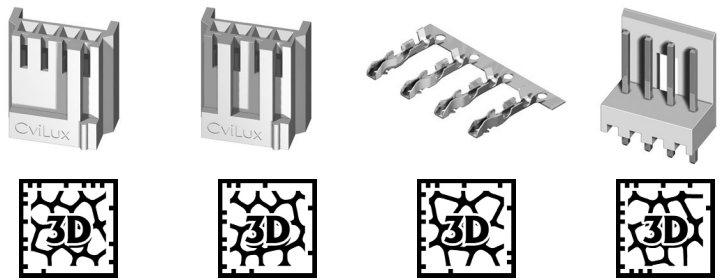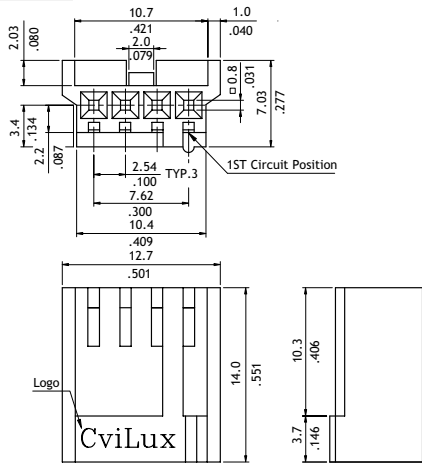


Part No.	Wire Range	Insulation Diameter	Reel Qty	Material
CI35T021BE0	AWG #22-#28	1.7 (.067) MAX.	10,000 PCS	Brass
CI35T021PE0	AWG #22-#28	1.7 (.067) MAX.	10,000 PCS	Phosphor Bronze

P/N CI3504SN000

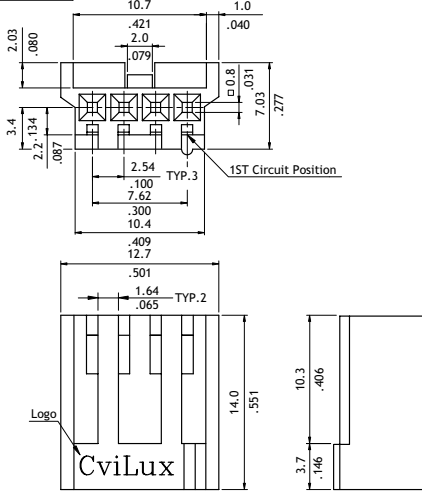

P/N CI3504P1*00

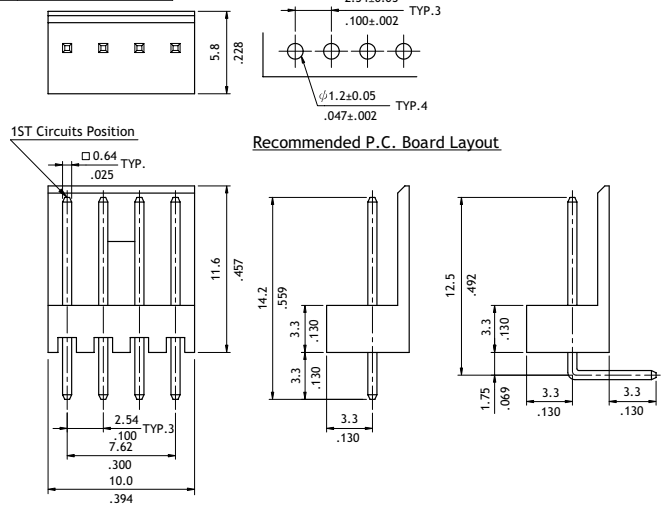

Recommended P.C. Board Layout

Ordering Code

1 CI **2** 35 **3** 04 **4** S **5** 0000


- ① Series No.
- ② No. of Circuits: 04
- ③ S = Housing
- ④ Other Options:
0000 = Single Rib (Standard)
N000 = Dual Ribs
*Special options consult manufacturer

1 CI **2** 35 **3** 04 **4** P **5** 1 **6** V **7** 00


- ① Series No.
- ② No. of Circuits: 04
- ③ P = Pin Header
- ④ Plating Code: 1 = Tin over Nickel
- ⑤ Type: V = Straight ; H = Right Angle
- ⑥ Other Options: 0 = Standard
*Special options consult manufacturer

CI83 Series 2.54mm(.100") Friction Lock Breakaway Headers



- ⊙ Options with straight and right angle tails
- ⊙ Available with flat back wall for polarization
- ⊙ Mate most of 2.54mm pitch connector in the market
- ⊙ Insulator: Glass filled polyester UL 94V-0, Color White
- ⊙ With Tin plated 0.64mm square pin

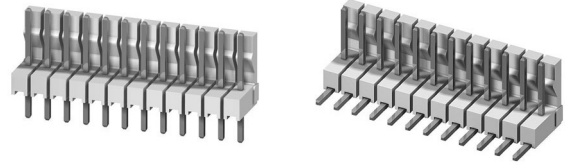


RoHS Compliant

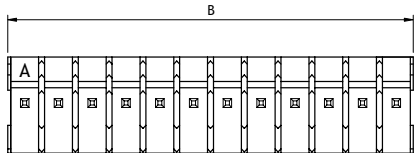


A = 2.54 x No. of Spaces
B = A + 2.54

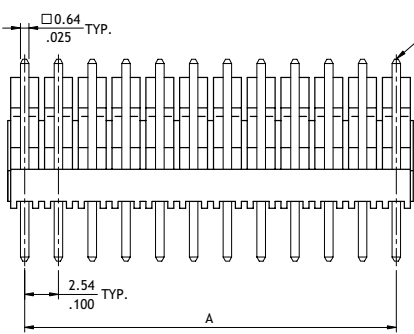


P/N: CI83**P*V00





P/N: CI83**P*V0L




Recommended P.C. Board Layout

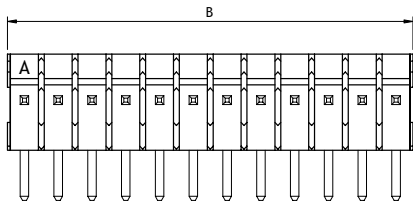


A = 2.54 x No. of Spaces
B = A + 2.54

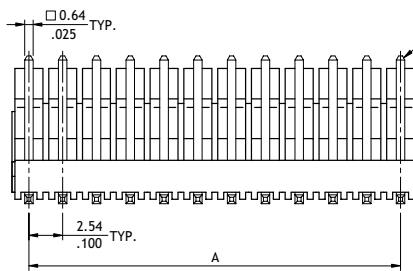

P/N: CI83**P*H00



P/N: CI83**P*H0L



Recommended P.C. Board Layout

Ordering Code

① CI83 **②** 36 **③** P **④** 1 **⑤** V **⑥** 00







- ①** Series No.
- ②** No. of Circuits: 02 to 36
- ③** P = DIP Header
- ④** Plating Code:
1 = Tin over Nickel
- ⑤** Type: V = Straight
H = Right Angle
- ⑥** Other Options:
00 = With Locking Ramp (Standard)
0L = Without Locking Ramp
*Special options consult manufacturer

CI




WIRE TO BOARD

CIL1 Series 3.50mm(.138") Board to Board Connectors

Mating Option 1

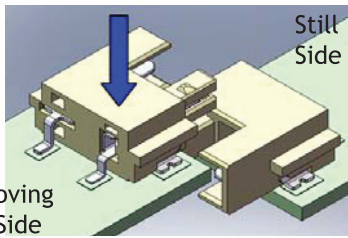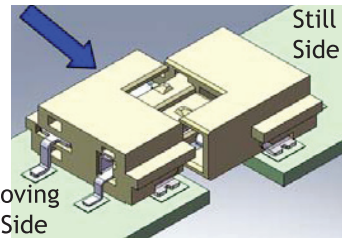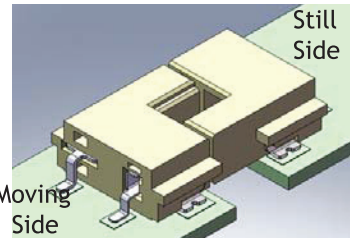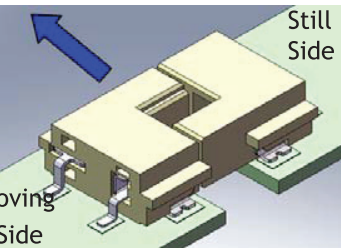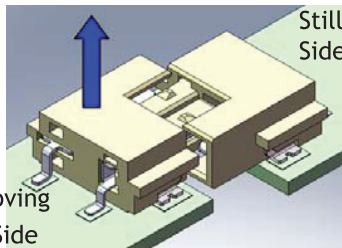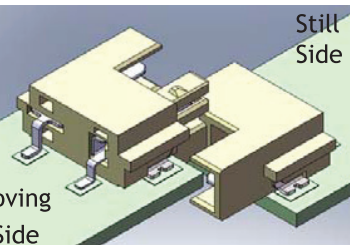Mating	 <p>Step 1: Put the moving side vertically above the still side. Then, move it downward.</p>	 <p>Step 2: Push the moving side horizontally into the still side.</p>	 <p>Step 3: Done</p>	
	Unmating	 <p>Step 1: Push out the moving side horizontally from the still side.</p>	 <p>Step 2: Rise the moving side vertically after it separated from the still side.</p>	 <p>Step 3: Done</p>




Mating Option 2

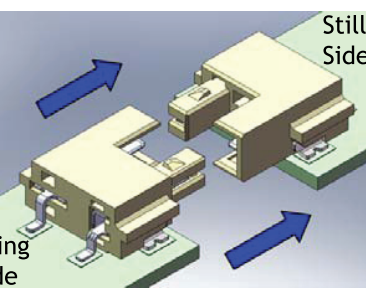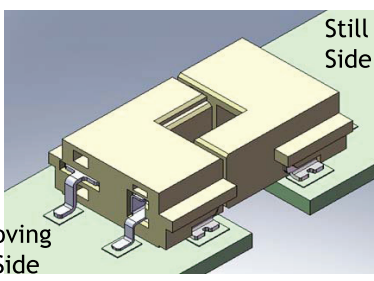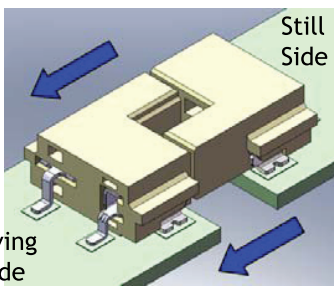Mating	 <p>Step 1: Push in the moving side into the still side horizontally the still side.</p>	 <p>Step 2: Done</p>
	Unmating	 <p>Step 1: Push out the moving side horizontally from the still side.</p>



CIL1 Series 3.50mm(.138") Board to Board Connectors

- ⊙ Simplify manufacturing procedure
- ⊙ Reduce the Cost
- ⊙ Insulator: High temperature plastic UL 94V-0

NEW

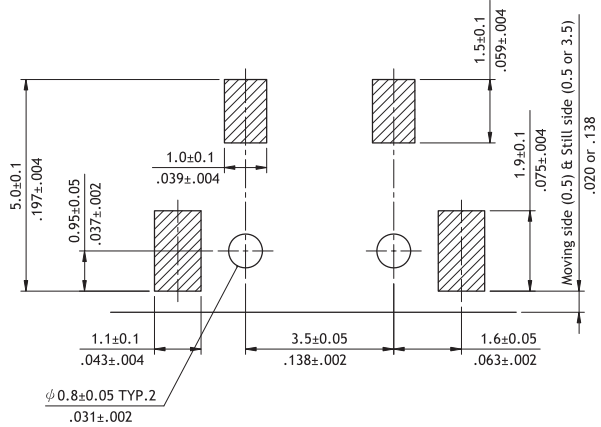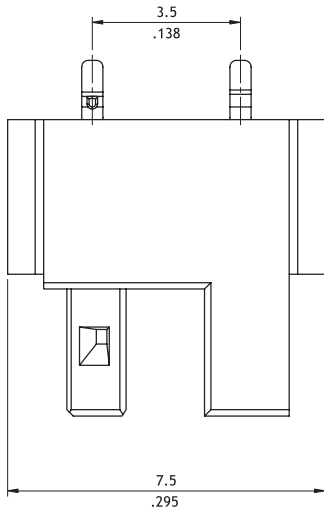

Recommended P.C.B Layout

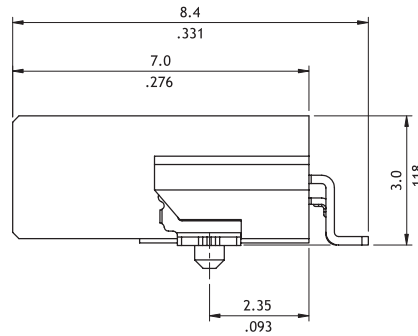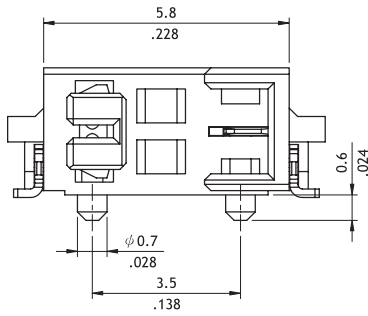

Ordering Code


① CIL1 ② 02 ③ M ④ 1 ⑤ H ⑥ R ⑦ 0 - ⑧ NH

- ① Series No.
- ② No. of Circuits: 02
- ③ M = SMT Type
- ④ Plating Code:
1 = Matte Tin over Nickel
- ⑤ Type: H = Side Entry
- ⑥ Packing Options:
R = Tape & Reel
- ⑦ Other Options:
0 = Standard
- ⑧ -NH = For Lead Free IR process and Halogen-Free and Halogen-Free


CID3 Series 3.96mm(.100") IDC Type Connectors

- Terminal: Tin-plated phosphor bronze
- Housing: UL94V-2 Nylon 66
- With or without locking ramp and polarizing tabs
- Feed-Thru and Closed End type
- Wire range AWG #18 ~ #26 (Flat ribbon wire)
- Mate with CI52 Headers

NEW



RoHS Compliant

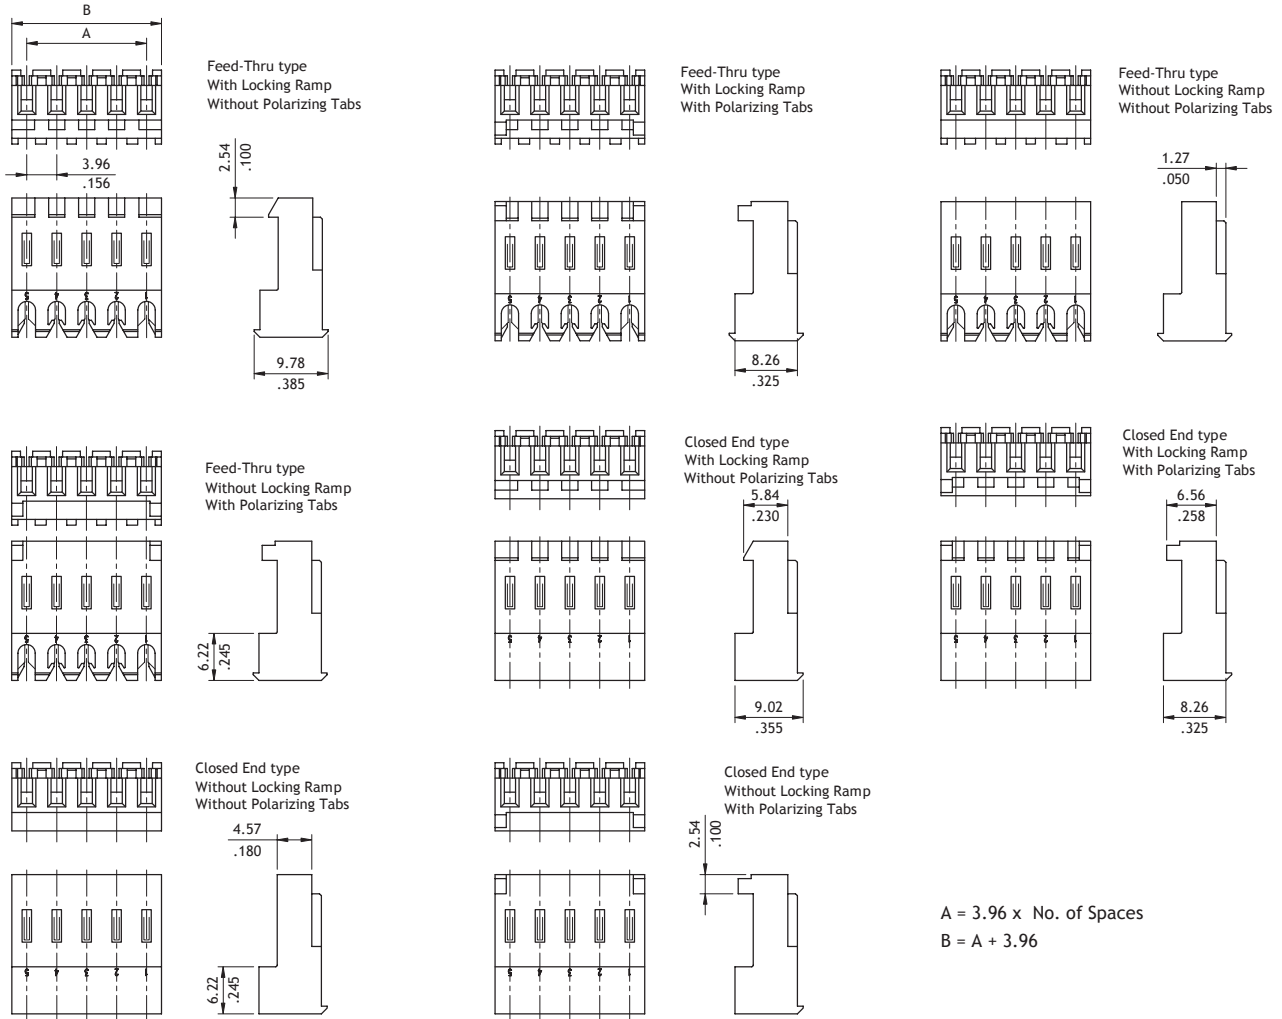






Ordering Code

① CID3 ② 18 ③ S ④ 1 ⑤ A ⑥ 0 ⑦ 0



- ①** Series No.
- ②** No. of Circuits: 02 to 18
- ③** S = Housing
- ④** Plating Code:
1 = Tin plated over Nickel
- ⑤** Type: A = Closed End Type
B = Feed-Through Type
- ⑥** Color Options:
0 = Color white, for AWG #24
3 = Color red, for AWG #22
4 = Color orange, for AWG #18
5 = Color yellow, for AWG #20
7 = Color blue, for AWG #26
- ⑦** Other Options:
0 = W/O Polarizing Tabs & Locking Ramp
L = W/O Polarizing Tabs, With Locking Ramp
P = With Polarizing Tabs, Without Locking Ramp
R = With Polarizing Tabs, With Locking Ramp

CI51 Series 3.96mm(.156") Wire to Board Connectors Housing & Terminal


- With locking ramp
- Mate with CI51, CI77 Header
- Can be used CI51 crimp clip terminal
- Insulator: Nylon 66 UL 94V-2, Color Nature
- Terminal: Tin plated Brass or Phosphor Bronze

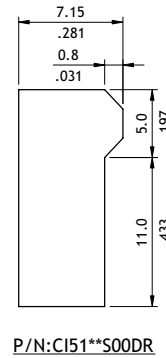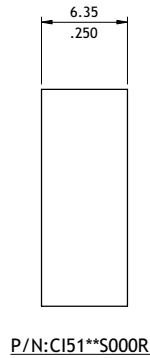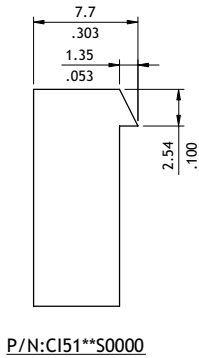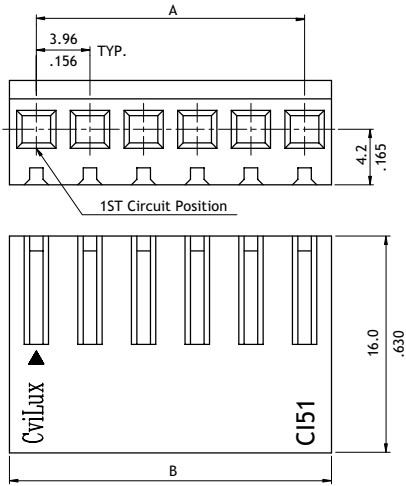

Circuits	Dimension	
	A	B
2	3.96(.156)	8.0(.315)
3	7.92(.312)	12.0(.472)
4	11.88(.468)	15.9(.626)
5	15.84(.624)	19.9(.783)
6	19.80(.780)	23.9(.941)
7	23.76(.935)	28.0(1.102)
8	27.72(1.091)	32.0(1.260)
9	31.68(1.247)	35.9(1.413)
10	35.64(1.403)	39.9(1.571)
11	39.60(1.559)	43.9(1.728)
12	43.56(1.715)	47.8(1.882)
13	47.52(1.871)	51.8(2.039)
14	51.48(2.027)	55.7(2.193)
15	55.44(2.183)	59.7(2.350)
16	59.40(2.339)	63.7(2.508)
17	63.36(2.494)	67.6(2.661)
18	67.32(2.650)	71.6(2.819)
19	71.28(2.806)	75.5(2.972)
20	75.24(2.962)	79.5(3.130)

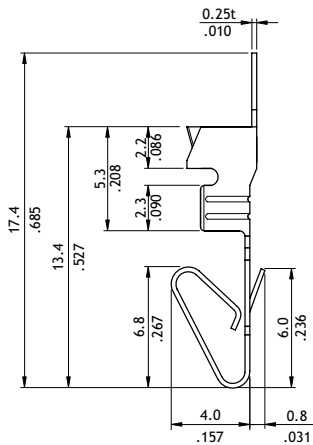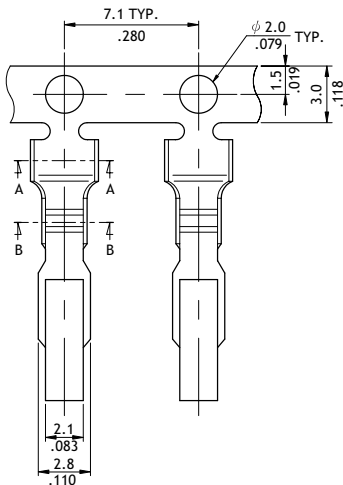

Wire Range	Insulation	Reel Q'ty
AWG #18-#24	2.10 (.083) MAX.	5,000 PCS



Ordering Code

1 CI51 **2** 20 **3** S **4** 0000



- 1** Series No.
- 2** No. of Circuits: 02 to 20
- 3** S = Housing
- 4** Other Options:
 0000 = With Locking Ramp (Standard)
 000R = Without Locking Ramp
 00DR = Low force locking Ramp
 *Special options consult manufacturer

1 CI51 **2** T03 **3** 1 **4** B **5** E **6** 0



- 1** Series No.
- 2** Type: T03 = AWG #18 ~ #24
- 3** Plating Code: 1 = Tin over Nickel
- 4** Material: B = Brass ; P = Phosphor Bronze
- 5** Plating Method: E = Pre-tinned
- 6** Other Options: 0 = Standard

CI51 Series 3.96mm(.156") Wire to Board Connectors DIP Headers

- With locking wall
- Mate with CI51 Housing
- Insulator: Nylon 66 UL 94V-2, Color Nature
- With Tin plated 1.14mm square pin

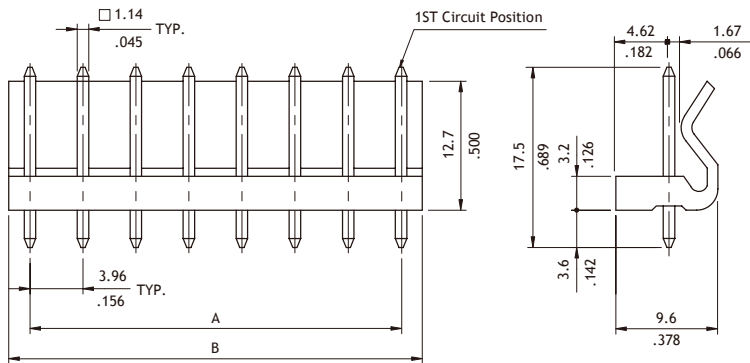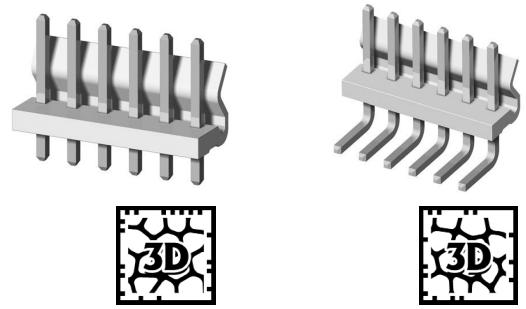

Circuits	Dimension	
	A	B
2	3.96(.156)	7.92(.312)
3	7.92(.312)	11.88(.468)
4	11.88(.468)	15.84(.624)
5	15.84(.624)	19.8(.780)
6	19.80(.780)	23.76(.935)
7	23.76(.935)	27.72(1.091)
8	27.72(1.091)	31.68(1.247)
9	31.68(1.247)	35.64(1.403)
10	35.64(1.403)	39.6(1.559)
11	39.60(1.559)	43.56(1.715)
12	43.56(1.715)	47.52(1.871)
13	47.52(1.871)	51.48(2.027)
14	51.48(2.027)	55.44(2.183)
15	55.44(2.183)	59.4(2.339)
16	59.40(2.339)	63.36(2.494)
17	63.36(2.494)	67.32(2.650)
18	67.32(2.650)	71.28(2.806)
19	71.28(2.806)	75.24(2.962)
20	75.24(2.962)	79.2(3.118)

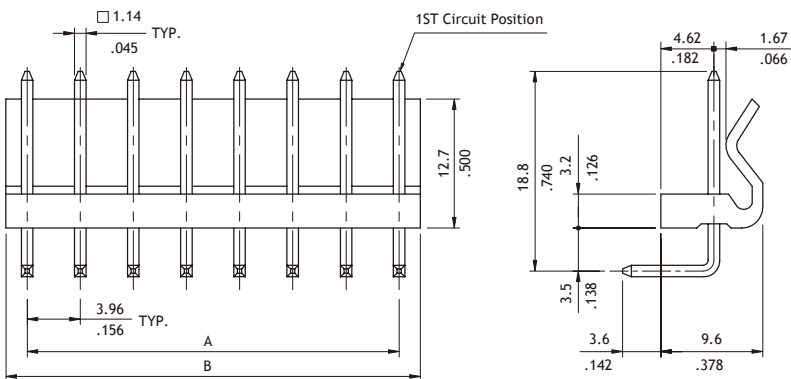

Recommended P.C. Board Layout



Ordering Code

① CI 51 ② 20 ③ P ④ 1 ⑤ V ⑥ 00

- ① Series No.
- ② No. of Circuits: 02 to 20
- ③ P = DIP Header
- ④ Plating Code:
1 = Tin over Nickel
- ⑤ Type: V = Straight
H = Right Angle
- ⑥ Other Options:
00 = Standard
*Special options consult manufacturer


CI52 Series 3.96mm(.156") Wire to Board Connectors Housing & Terminal

- With locking latch
- Mate with CI52 Header
- Can be used CI52 crimp clip terminal
- Insulator: Nylon 66 UL 94V-0, Color Nature
- Terminal: Tin plated Brass or Phosphor Bronze

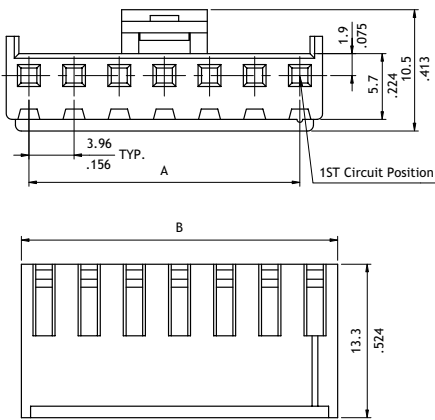



Circuits	Dimension	
	A	B
2	3.96(.156)	7.9(.311)
3	7.92(.312)	11.9(.469)
4	11.88(.468)	15.8(.622)
5	15.84(.624)	19.8(.780)
6	19.80(.780)	23.8(.937)
7	23.76(.935)	27.7(1.091)
8	27.72(1.091)	31.7(1.248)
9	31.68(1.247)	35.6(1.402)
10	35.64(1.403)	39.6(1.559)
11	39.60(1.559)	43.6(1.717)
12	43.56(1.715)	47.5(1.870)



P/N CI52**SM000

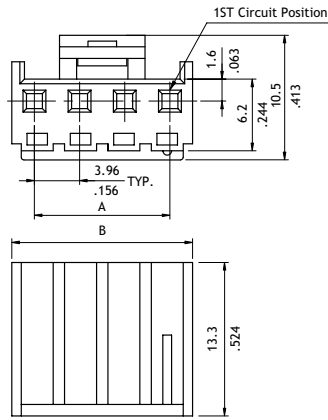



Circuits	Dimension	
	A	B
2	3.96(.156)	7.92(.312)
3	7.92(.312)	11.88(.468)
4	11.88(.468)	15.84(.634)

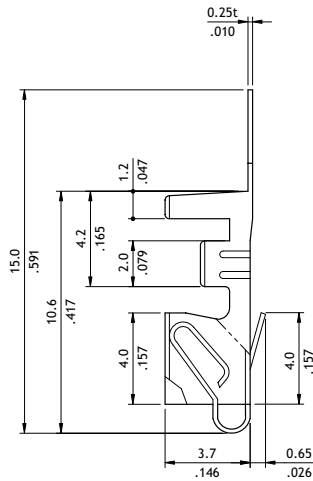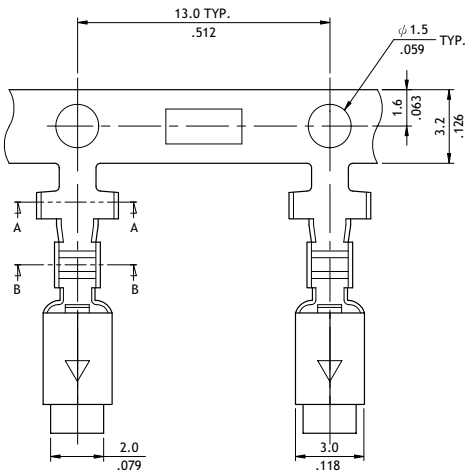

Part No.	Wire Range	Insulation Diameter	Reel Qty
CI52T021*E0	AWG #22-#28	1.90 (.075) MAX.	3,500 PCS
CI52T031*E0	AWG #18-#22	2.70 (.106) MAX.	3,500 PCS



P/N:CI52T021*E0



P/N:CI52T031*E0

Ordering Code

1 CI52 **2** 12 **3** S **4** 0000




- ① Series No.
- ② No. of Circuits: 02 to 12
- ③ S = Housing
- ④ Other Options:
0000 = Standard
M000 = Special Type
*Special options consult manufacturer

1 CI52 **2** T03 **3** 1 **4** B **5** E **6** 0




- ① Series No.
- ② Type: T02 = AWG #22 ~ #28
T03 = AWG #18 ~ #22
- ③ Plating Code: 1 = Tin over Nickel
- ④ Material: B = Brass ; P = Phosphor Bronze
- ⑤ Plating Method: E = Pre-tinned
- ⑥ Other Options: 0 = Standard

CI52 Series 3.96mm(.156") Wire to Board Connectors DIP Headers

- With locking wall
- Mate with CI52 Housing
- Insulator: Polyamide UL 94V-0, Color Nature
- With Tin plated 1.14mm square pin

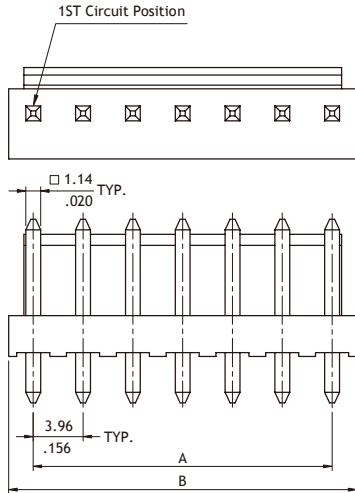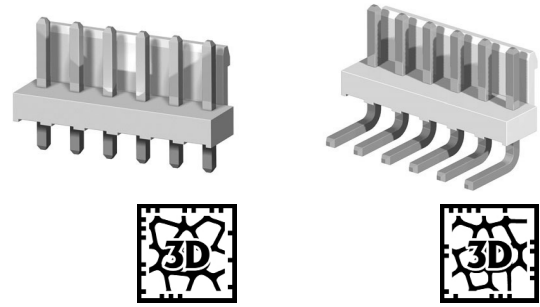

Circuits	Dimension	
	A	B
2	3.96(.156)	7.8(.307)
3	7.92(.312)	11.8(.465)
4	11.88(.468)	15.8(.622)
5	15.84(.624)	19.7(.776)
6	19.80(.780)	23.7(.933)
7	23.76(.936)	27.6(1.087)
8	27.72(1.091)	31.6(1.244)
9	31.68(1.247)	35.5(1.398)
10	35.64(1.403)	39.5(1.555)
11	39.60(1.559)	43.5(1.713)
12	43.56(1.715)	47.4(1.866)

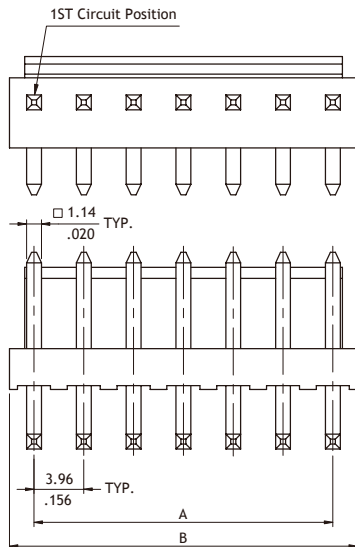

Recommended P.C. Board Layout


Ordering Code

1 CI **2** 5 **2** **3** P **4** 1 **5** V **6** 00 - **7** LF


- 1** Series No.
- 2** No. of Circuits: 02 to 12
- 3** P = DIP Header
- 4** Plating Code: 1 = Tin over Nickel
- 5** Type: V = Straight
H = Right Angle
- 6** Other Options:
00 = Standard
*Special options consult manufacturer
- 7** -LF = For Lead Free soldering process

CI82 Series 3.96mm(.156") Friction Lock Breakway Headers


- ⊙ Options with straight and right angle tails
- ⊙ Available with flat back wall for polarization
- ⊙ Mate most of 3.96mm pitch connector in the market
- ⊙ Insulator: Glass filled polyester UL 94V-0, Color White
- ⊙ With Tin plated 1.14mm square pin

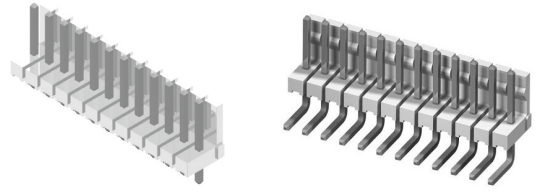



RoHS Compliant

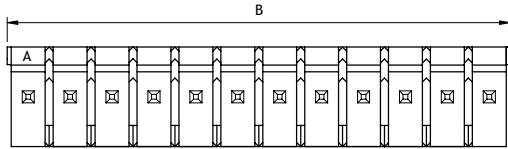

A = 3.96 x No. of Spaces
B = A + 3.96




Recommended P.C. Board Layout

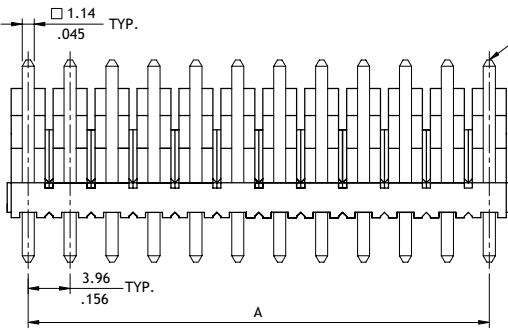


P/N: CI82**P*V00



P/N: CI82**P*V0L

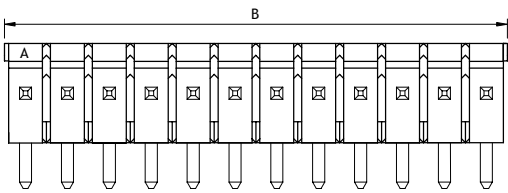

A = 3.96 x No. of Spaces
B = A + 3.96



Recommended P.C. Board Layout

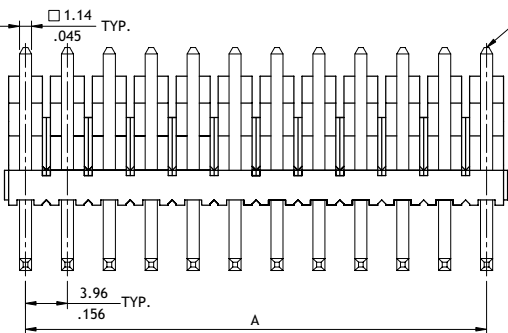

P/N: CI82**P*H00

P/N: CI82**P*H0L



Ordering Code

① CI82 ② 24 ③ P ④ 1 ⑤ V ⑥ 00


- ①** Series No.
- ②** No. of Circuits: 02 to 24
- ③** P = DIP Header
- ④** Plating Code:
1 = Tin over Nickel
- ⑤** Type: V = Straight
H = Right Angle
- ⑥** Other Options:
00 = With Locking Ramp (Standard)
0L = Without Locking Ramp
*Special options consult manufacturer

CI55 Series 5.08mm(.200") Wire to Board Connectors

- Housing with locking ramp
- Header with locking wall
- Can be used CI51 crimp clip terminal
- Insulator: Nylon 66 UL 94V-2, Color Nature
- With Tin plated 1.14mm square pin
- Terminal: Tin plated Brass

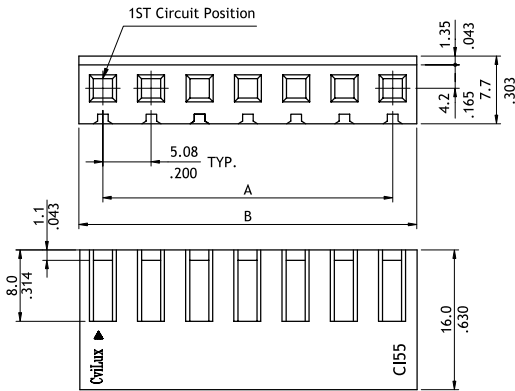
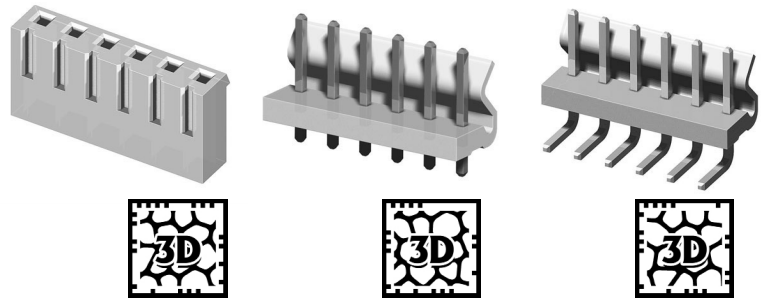


P/N:CI55**S0000






P/N:CI55**S000R

Circuits	Dimension	
	A	B
2	5.08(.200)	10.1(.398)
3	10.16(.400)	15.2(.598)
4	15.24(.600)	20.5(.807)
5	20.32(.800)	25.3(.996)
6	25.40(1.00)	30.6(1.205)
7	30.48(1.20)	35.5(1.398)
8	35.56(1.40)	40.8(1.606)
9	40.64(1.60)	45.6(1.795)
10	45.72(1.80)	50.7(1.996)

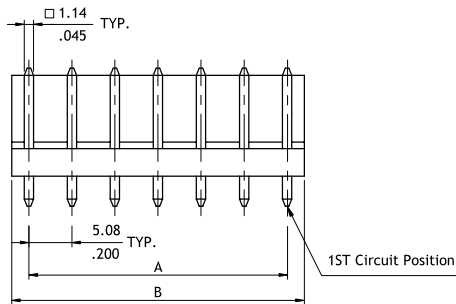

Circuits	Dimension	
	A	B
2	5.08(.200)	10.2(.402)
3	10.16(.400)	15.2(.598)
4	15.24(.600)	20.3(.799)
5	20.32(.800)	25.4(1.000)
6	25.40(1.000)	30.5(1.201)
7	30.48(1.200)	35.6(1.402)
8	35.56(1.400)	40.6(1.598)
9	40.64(1.600)	45.7(1.799)
10	45.72(1.800)	50.8(2.000)

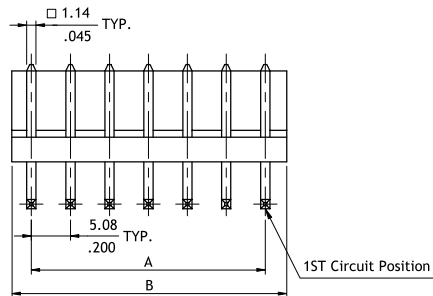

Recommended P.C. Board Layout

Ordering Code

1 **2** **3** **4**
CI55 10 S 0000


- ① Series No.
- ② No. of Circuits: 02 to 10
- ③ S = Housing
- ④ Other Options:
 0000 = Standard
 000R = Without Locking Ramp
 *Special options consult manufacturer

1 **2** **3** **4** **5** **6**
CI55 10 P 1 V 00




- ① Series No.
- ② No. of Circuits: 02 to 10
- ③ P = DIP Header
- ④ Plating Code: 1 = Tin over Nickel
- ⑤ Type: V = Straight ; H = Right Angle
- ⑥ Other Options: 00 = Standard
 *Special options consult manufacturer

CI77/CI78 Series 3.96mm(.156") / 5.00mm(.196") Breakaway Pin Headers


- Mate with CI51 and CID3 Connector
- Available straight and right angle type
- Options plating available
- Insulator: Glass filled polyester UL 94V-0, Color White
- With Tin plated 1.14mm square pin

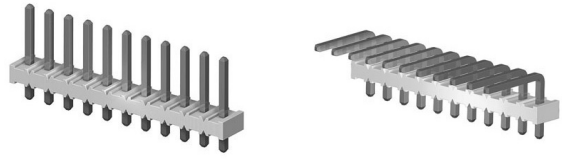

P/N CI77**P1*00



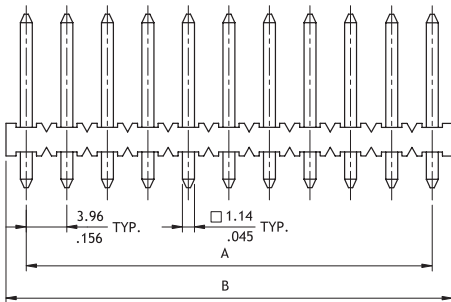


A = 3.96 x No. of Spaces
B = A + 3.96




Recommended P.C. Board Layout

P/N CI78**P1*00

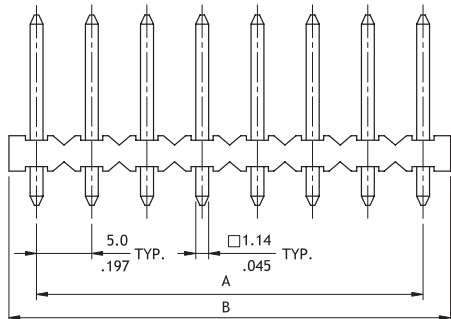

A = 5.0 x No. of Spaces
B = A + 5.0



Recommended P.C. Board Layout


Ordering Code

① CI 77 ② 20 ③ P ④ 1 ⑤ V ⑥ 00






- ①** Series No.
CI77 = 3.96mm center spacing
CI78 = 5.00mm center spacing
- ②** No. of Circuits: 02 to 20
- ③** P = DIP Header
- ④** Plating Code: 1 = Tin over Nickel
- ⑤** Type: V = Straight
H = Right Angle
- ⑥** Other Options:
00 = Standard
*Special options consult manufacturer

CI94 Series Serial ATA Power Crimp Terminal & Receptacle Connectors

- Meet Serial ATA Specification
- Connector interface for both 2.5" and 3.5" devices
- Supporting power delivery with 12.0V, 5.0V, and 3.3V
- Insulator: Glass Filled Polyester

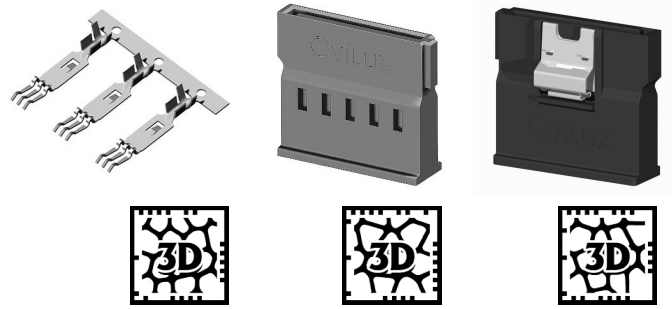

RoHS Compliant

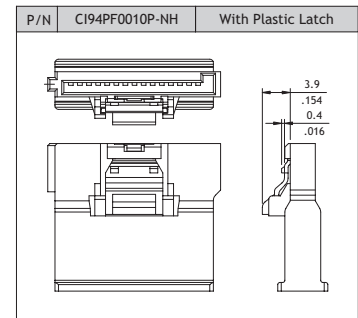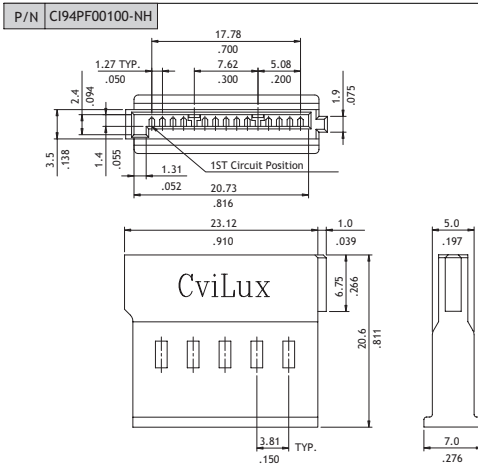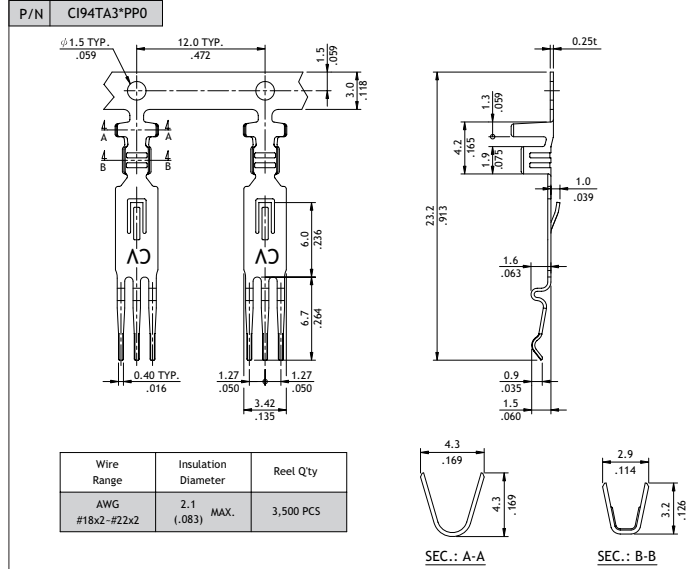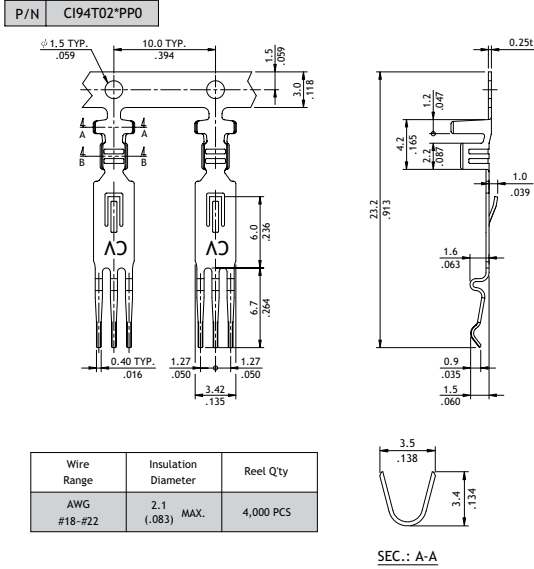

Ordering Code

1 **2** **3** **4** **5** **6**
CI94TA3APP0


- 1** Series No.
- 2** Type: T03 = AWG #18 ~ #22
TA3 = AWG #18x2 ~ #20x2
- 3** Plating Code: A = Selective Gold flash over Nickel
- 4** Material: P = Phosphor Bronze
- 5** Plating Method: P = Post plating
- 6** Other Options: 0 = Standard

1 **2** **3** **4** **5** **6**
CI94PF00100-NH

- 1** Series No.
- 2** P = Power
- 3** Type: F = Female
- 4** Color: 001 = Black
- 5** Other Options:
00 = Without Latch (Standard)
0L = With Metal Latch
0P = With Plastic Latch
- 6** -NH = Halogen-Free


CI94 Series Serial ATA Power IDC Type Receptacle Connectors

- ⊙ Meet Serial ATA Specification
- ⊙ Connector interface for both 2.5" and 3.5" devices
- ⊙ Supporting power delivery with 12.0V, 5.0V, and 3.3V
- ⊙ Insulator: Glass Filled Polyester
- ⊙ Contact: Gold plated Phosphor Bronze

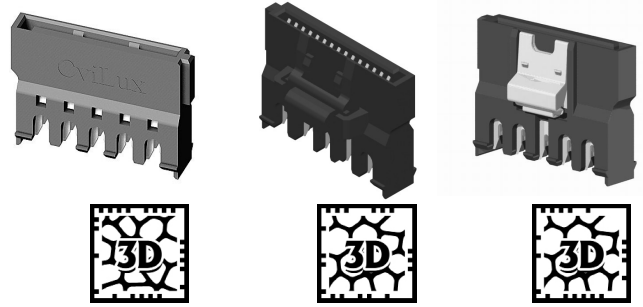


RoHS Compliant HF **RU**


P/N CI94PFI*1*0

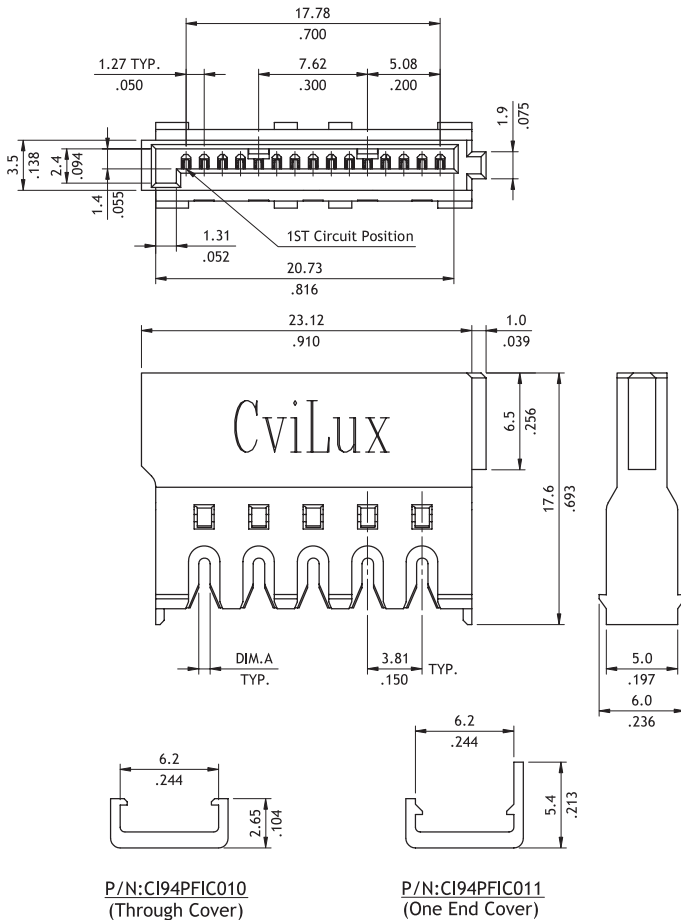

P/N CI94PFI*1*L-NH With Metal Latch

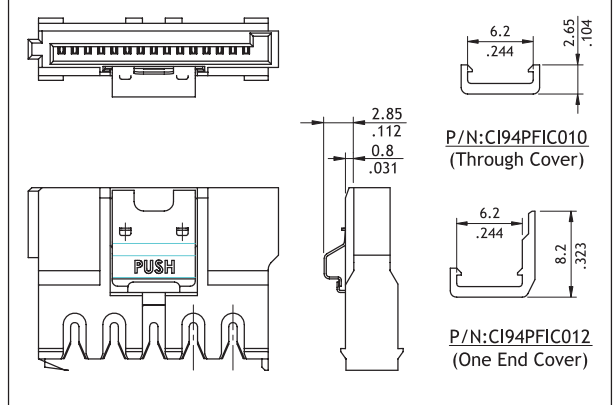

P/N CI94PFI*1*P-NH With Plastic Latch

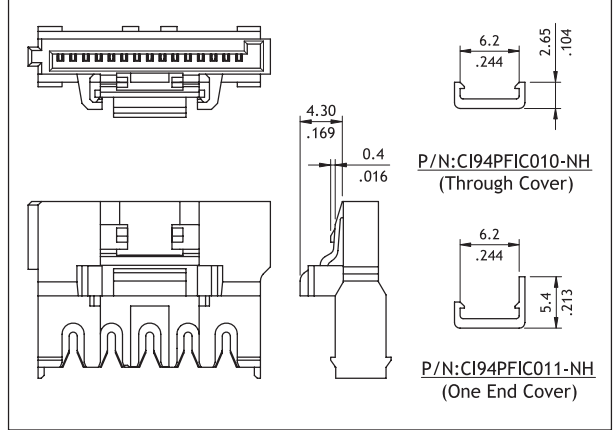




Ordering Code

① CI94 ② P ③ F I ④ A ⑤ 1 ⑥ A ⑦ 0 - ⑧ NH

- ① Series No.
- ② P = Power
- ③ Type: FI = Female & IDC Type
- ④ Plating Code:
A = Selective Gold flash over Nickel
- ⑤ Color: 1 = Black
- ⑥ Type: A = Accept AWG #18 (DIM.A = 0.75mm)
B = Accept AWG #20 ~ #22 (DIM.A = 0.60mm)
- ⑦ Other Options:
0 = Without Latch (Standard)
L = With Metal Latch
P = With Plastic Latch
- ⑧ -NH = Halogen-Free

CI94 Series Serial ATA Power Solder Type Receptacle Connectors

- ⊙ Meet Serial ATA Specification
- ⊙ Connector interface for both 2.5" and 3.5" devices
- ⊙ Supporting power delivery with 12.0V, 5.0V, and 3.3V
- ⊙ Insulator: Glass Filled Polyester
- ⊙ Contact: Gold plated Phosphor Bronze

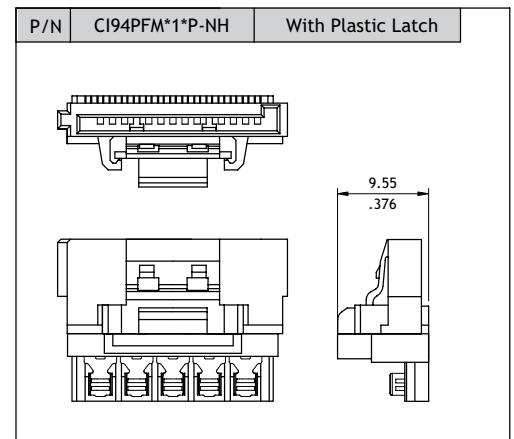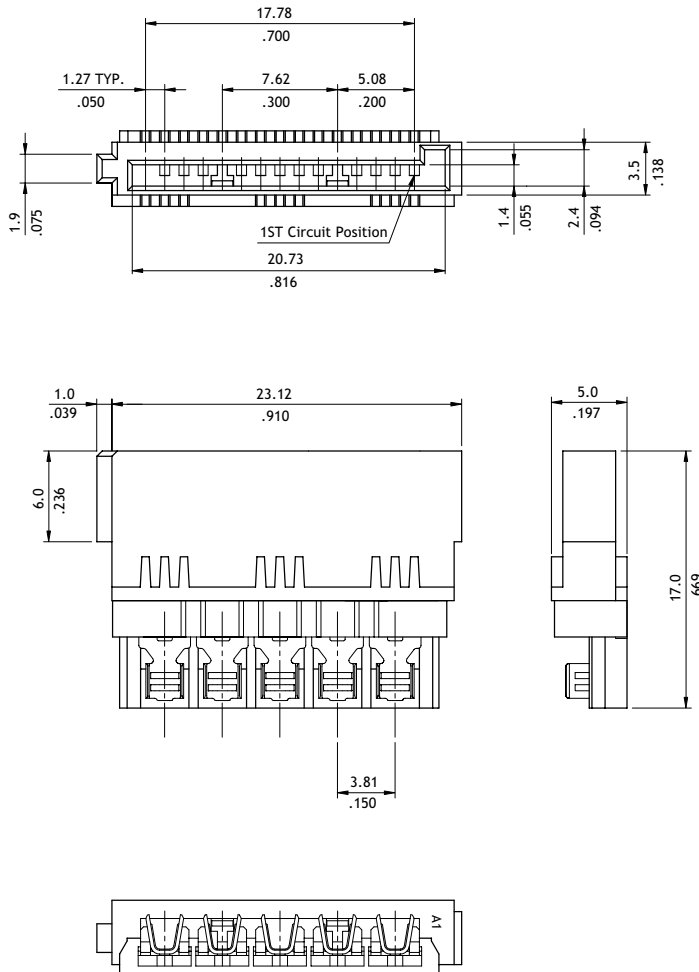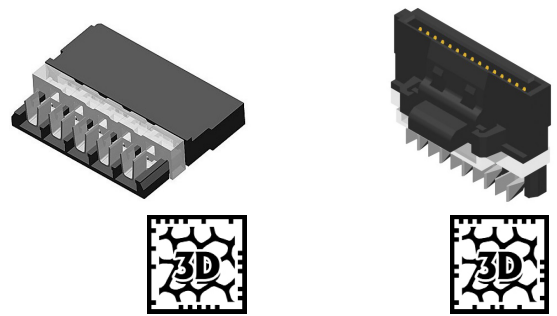


Ordering Code

1 2 3 4 5 6 7 8
CI94 P FM A 1 A 0 - NH

- 1** Series No.
- 2** P = Power
- 3** Type: FM = Female & Solder Type for Molding process
- 4** Plating Code:
A = Selective Gold flash over Nickel
- 5** Color: 1 = Black
- 6** Type: 0 = AWG #18 ~ #22
A = AWG #18*2 ~ #22*2
- 7** Other Options:
0 = Without Latch
P = With Plastic Latch
- 8** -NH = Halogen-Free

CI94 Series Serial ATA Power Molding Type Receptacle Connectors

- ⊙ Crimp Type for Molding process
- ⊙ Meet Serial ATA Specification
- ⊙ Connector interface for both 2.5" and 3.5" devices
- ⊙ Supporting power delivery with 12.0V, 5.0V, and 3.3V
- ⊙ Unmating Force more than 2.0Kgf
- ⊙ Insulator: Glass Filled Polyester
- ⊙ Contact: Gold plated Phosphor Bronze



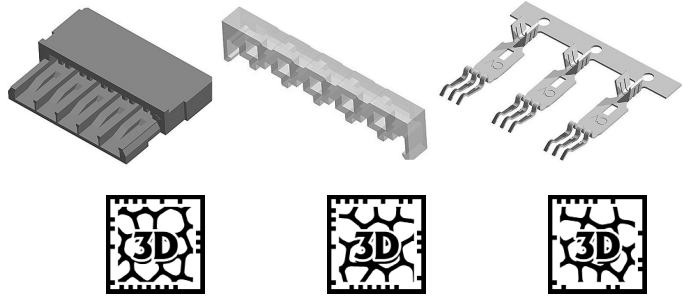


RoHS Compliant  


Housing	
P/N	CI94PFM001B

Housing (With Plastic Latch)	
P/N	CI94PFC*1*P-NH

Cover	
P/N	CI94PFM000C

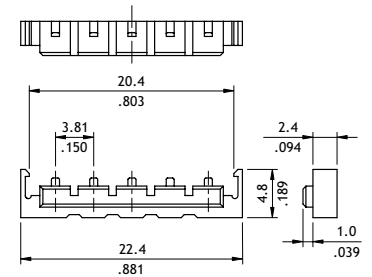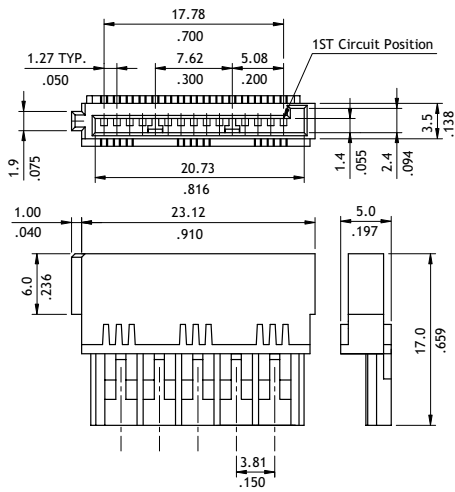


Terminal

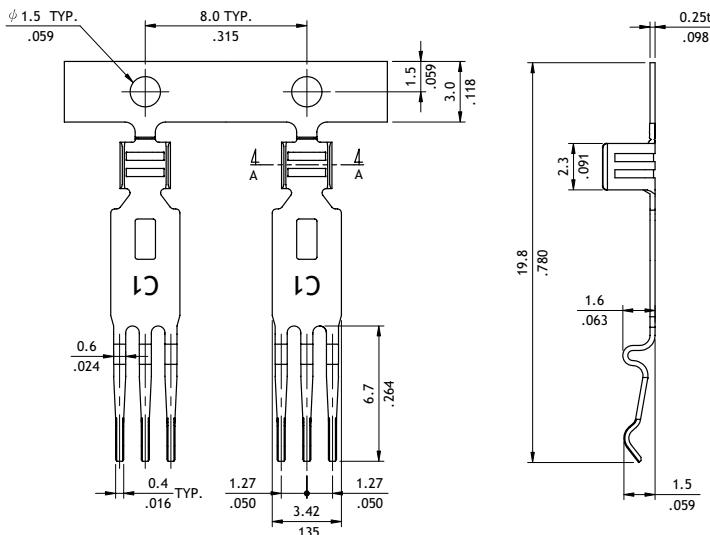


Part No.	Wire Range	Insulation Diameter	Reel Qty
CI94TM3*PP0	AWG #18-#22	2.1 (.083) MAX.	5,000 PCS
CI94TMA*PP0	AWG #18x2-#22x2	2.1 (.083) MAX.	5,000 PCS

P/N: CI94TMA*PP0




SEC.: A-A

P/N: CI94TM3*PP0








SEC.: A-A

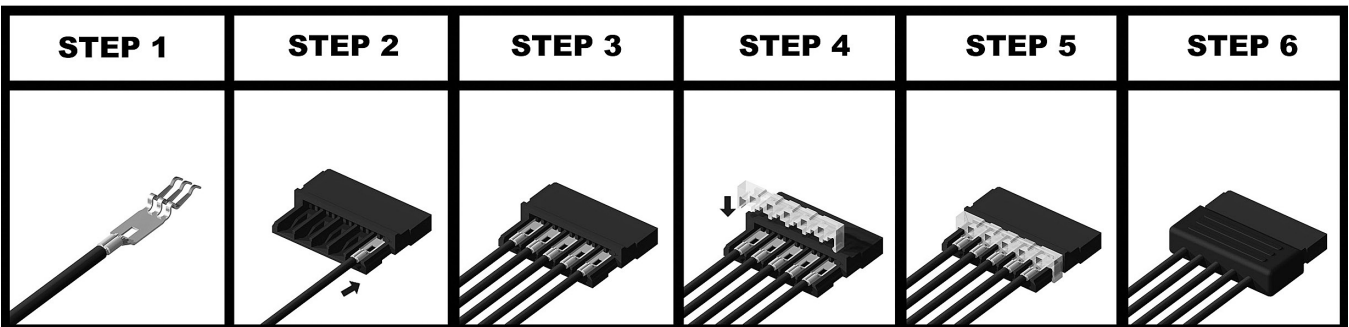

CI95 Series Serial ATA SMT Connectors

- ⊙ Insulation: High temperature plastic UL 94V-0, Color Black
- ⊙ Connector: Copper alloy
- ⊙ Shell: Copper alloy

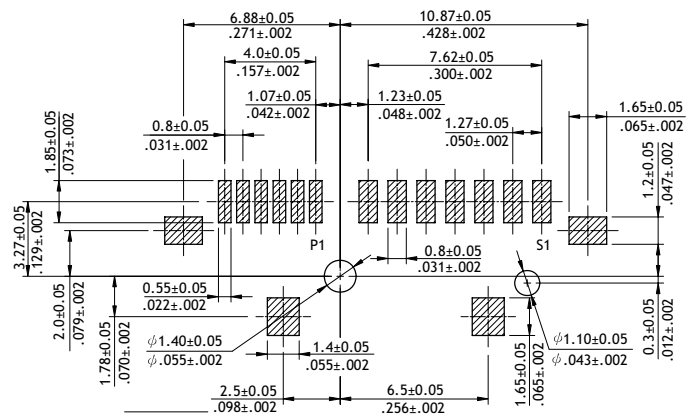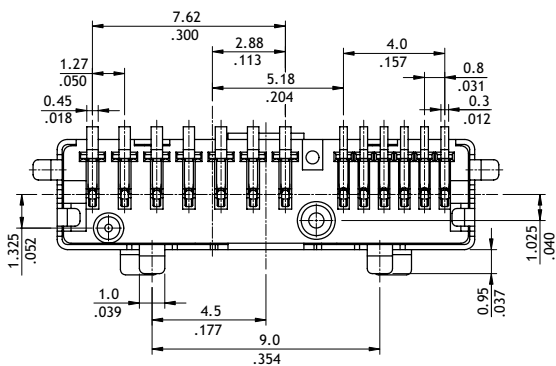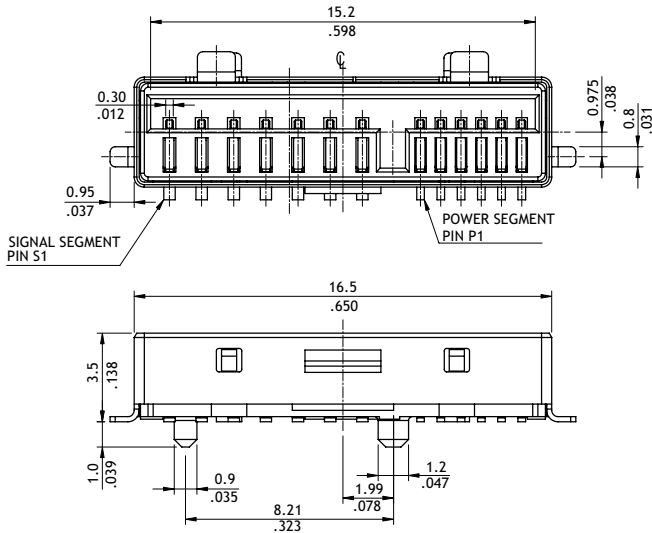

Recommended P.C. Board Layout

P1 DP P2 +5V P3 +5V
P4 MD P5 GND P6 GND

Ordering Code

1 CI95 **2** P **3** E **4** M **5** 1 **6** 000 - **7** NH

- 1** Series No.
- 2** Connector Type: P = Power
- 3** Plating Code:
E = Gold flash over Nickel
- 4** Contact Tail Style:
M = SMT Type

- 5** Color: 1 = Black
- 6** Other Options:
000 = Standard
- 7** -NH = For Lead Free soldering process and Halogen-Free