


△ SPECIFICATION

Rating:100V AC At 1A
 Insulation Resistance:Over 100 Megaohms
 At 500V DC
 Dielectric Strength: 250V AC For 1 Minute
 RoHS Compliant

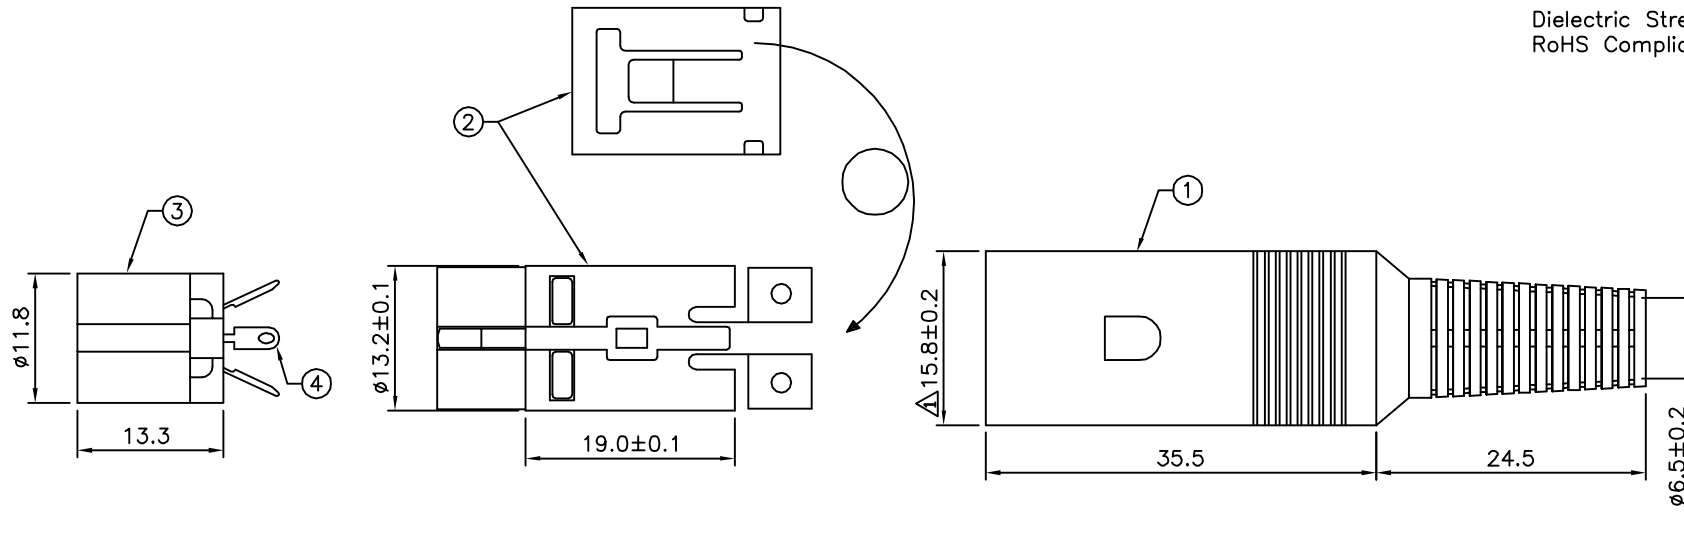

△ DA XX S - XXX - H
 (1) (2) (3) (4) (5)

- (1) DA: Din Connector Solder Wire Assembly Type
- (2) XX: No. Of Position
- (3) S: Female
- (4) XXX: Special Pin Locking Blank: Standard Type 240:5 Pin 240°
- (5) H: RoHS Compliant

Angle	180°	210°	180°	240°	240°	270°	270°
△ P/N	DA03S-H	DA04S-H	DA05S-H	DA05S-240-H	DA06S-H	DA07S-H	DA08S-H

No.	Description	Material	Remark
①	Boat	EVA	Black
②	Metal Part	Steel	Nickel Plated
③	Insulator	PC	
④	Pin Contact	Brass	Silver Plated

AUK A MEMBER OF AUK GROUP
太聯事業股份有限公司
AUK CONTRACTORS CO., LTD.

CATEGORY		APPROVED BY EMILY	
PART No. DAXXS-XXX-H		CHECKED BY HZF	
DRAWING No. DAXXS-XXX-H		DRAWING BY HAO	
SCALE	NONE	REV.	A2

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
 .X ±0.1
 .XX ±0.05
 ANG.

NO.	REV.	REVISIONS	CHK	DATE
△ A2		Modify Data	HZF	11/29/2014
△ A1		Modify P/N: DAXXS --> DAXXS-XXX-H	HZF	12/29/2010
△ A0		NEW RELEASE		