
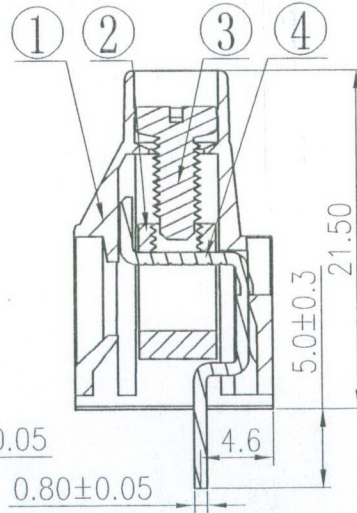
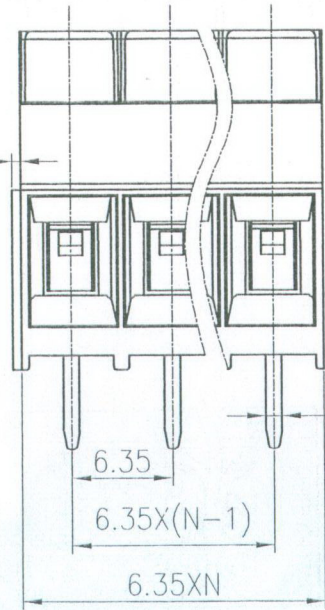
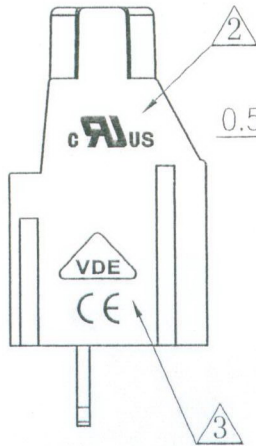
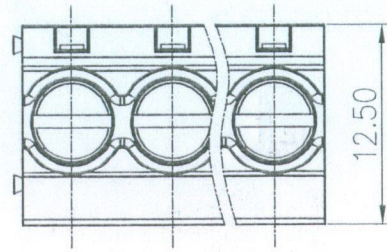


REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	DATE
△		Drawing revise	Haoyh	04/27/06
△		增加UL刻字	Yej	09/12/06
△		增加VDE、CE标志	WLM	08/05/08

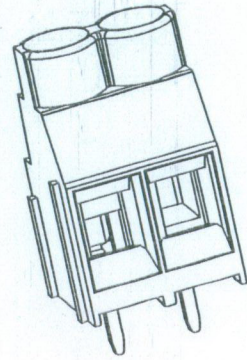

Notes:

- Pitch: 6.35mm, Poles: 2-XXP
- Rated voltage/current: UL 300V/30A  
VDE 450V/24A
- Operation temperatures: -40°C ~ +105°C
- Withstanding Voltage: AC2000V/1min
- Insulation Resistance: 5000MΩ/DC1000V
- Wire Range: 26~10AWG, 4.0mm<sup>2</sup>
- Max. Torque Value: M3, 5.1kgf.cm
- Undimensioned Tolerances:

Pitch range in mm			Nominal dimension range in mm				
to	over	to	to	over	over	over	
6	6	10	30	30	60	100	150
6	10	24	30	60	100	150	
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0



4	DG636-Pin header	4044B00010 (H)	XX	Brass	SnCe plated
3	DG636 "—" Screws	S000001590 (H)	XX	Steel	Cr <sup>3+</sup> Zn
2	950 Brass cage	X000000310 (H)	XX	Brass	Ni plated

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
1	DG636-6.35 HOUSING	4044A0YXXA (H)	1	PA66	UL94V-0B

MM (INCH) TOLERANCES EXCEPT AS NOTED .0 ± .00 ± .000 ±	DFTO Haoyh CHD MFO APPVL DATE DATE DATE	DATE 10/19/06 DATE 08/16/08 DATE 08/16/08	宁波高正电子有限公司 DEGSON® DEGSON ELECTRONICS CO., LTD NAME DG636-6.35-XXP-1Y-00A (H)
ANGLES ± 1° THIRD ANGLE PROJECTION	G. E : FINISH : SCALE : 1:1	DRAWING NO. DG636-6.35-E01 /PART NO. DO NOT SCALE DRAWING	SIZE A3 REV T3 08/05/08 SHEET 1 OF 1