
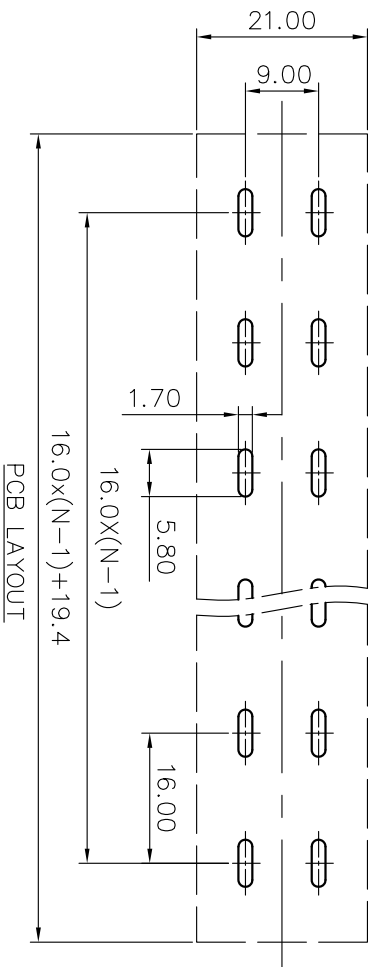
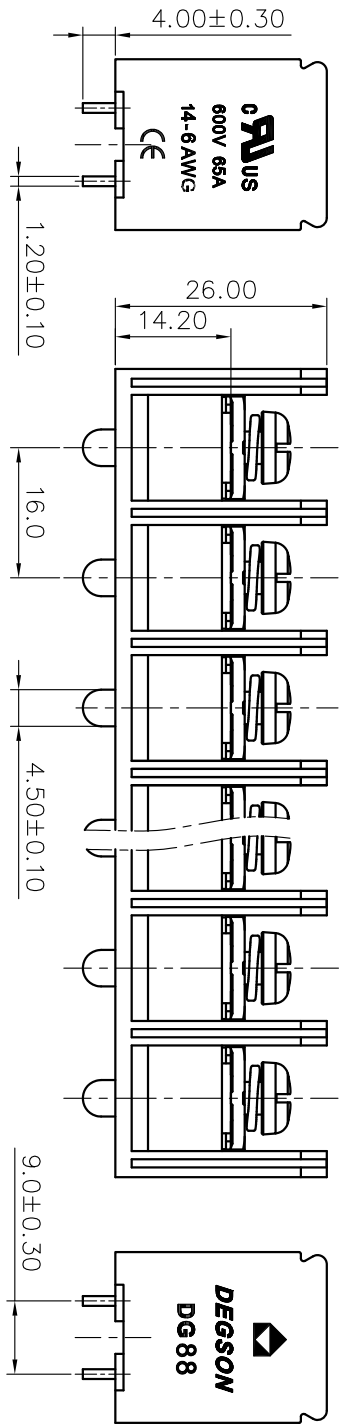



REVISION RECORD			
REV	ECN	DESCRIPTION	DRFT DATE

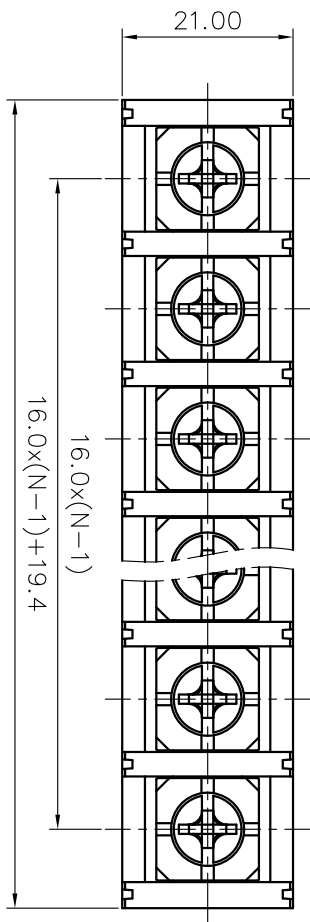

- NOTES1:
 UL Standard
 1. Rated voltage/current : 600V / 100A
 2. Torque value : M5 , 22Lb.in
 3. Wire range : 14~3AWG
- NOTES2:
 1. Dimension shall be interpreted per ASME Y14.5-2009
 2. Pitch : 16.0mm, Poles : N=02~20P
 3. Withstanding voltage : AC2200V/1Min
 4. Operating temperature: -40°C~+105°C
 5. Undimensioned tolerances:

Pitch range in mm	Nominal dimension range		mm	mm
	Over	Under		
6 TO 10	±0.15	±0.20	±0.30	±0.50
10 TO 24	±0.30	±0.50	±0.70	±1.00
30 TO 60	±0.50	±0.70	±1.00	±1.30
60 TO 100	±0.70	±1.00	±1.30	±2.0
100 TO 150	±1.00	±1.50	±2.0	±2.5
150 TO 300	±1.50	±2.0	±2.5	±3.0

6. RoHS Compliance

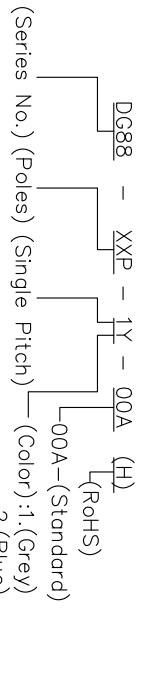

DETACHED LISTS			
PART NO.:	/	NAME:	DEGSON ® NINGBO DEGSON ELECTRICAL CO., LTD 宁波高松电子有限公司
APPD:	/	CHKD:	/
DRFT:	/	TITLE:	CUSTOMER DRAWING
THIRD ANGLE PROJECTION		DRAWING NO.:	/
		DO NOT SCALE DRAWING	SCALE
			1:1

A B C D E F G H

8 7 6 5 4 3 2 1