

## Specifications

備注 (Remark)

1. 材料 (Material)

膠芯: PA9T /LCP+30%G. F UL94V-0, 顏色: 黑色

Housing: PA9T/LCP+30%G. F UL94V-0, Color: Black

端子: 磷銅

Contact: Phosphor Bronze

2. 特性 (characteristics):

額定電流: 3.00AMP

Rating Current: 3.00AMP

接觸阻抗: 20mΩ Max

Contact Resistance: 20mΩ Max

絕緣阻抗: 1000MΩ Min


Insulating Resistance: 1000 MΩ Min

耐電壓: AC 1000V/分鐘


Withstanding Voltage: AC 1000V/Minute

溫度範圍: -40° C to +105° C


Temperature Range: -40° C to +105° C




F185-12XXXXSYX1



F185-12XXXXRYX1




F185-12XXXXMYX1



















F185-12XXXXZYX1

Mating With/配對公座:  
P110/P115/P117/P120/P125  
P128/P130/P143/P174

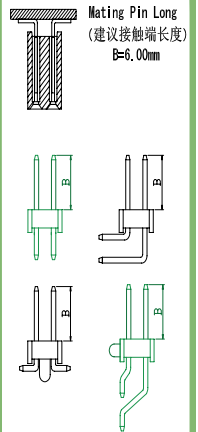

FEMALE HEADER



**F 185-12**

**XX**  
No. Of Pins Per Row  
02~40P

**XX**

**Contact Plating**  
Full Of Gold A0=0.8u"  
Semi-Gold B0=0.8U"  
~  
A9=30u" B9=30U"  
S1=Ordinary Tin Plated  
S2=Matte Tin Plated  
S3=Tin-plated High-temperature

**X**

**Insulator Material:**  
A: PBT  
B: PA6T  
C: PA9T  
D: LCP

**X**

**Contact Shape:**  
S: Straight  
R: Right Angle  
M: SMT  
Z: 90° SMT

**Y**

**Packing**  
A: PE Bag  
B: Tape & Reel  
C: Tube  
D: Tube+CAP  
E: Tray

**X**

**1**