

PRODUCT SPECIFICATIONS

DC Power Jack Connector

Mechanical

Mating Force: 1.5Kg max. (3.33Lb)
Unmating Force: 0.35Kg min. (0.78Lb)
Durability: 20000 Cycles


JPD Series
Right Angle, T/H
3 Pos.

Electrical


Voltage Rating: 42V
Current Rating: 10A max.
Contact Resistance: 30mW max. (initial)
 40mW max. (after Life Test)
Dielectric Withstanding Voltage: 150V AC/1min min.
Insulation Resistance: 100MW min.

Physical

Housing: Hi-Temp. Thermoplastic, UL 94V-0 rated
Contact: Copper alloy
Plating: See "ORDERING INFORMATION"
Operating Temperature: -40 to +85



DRAWING

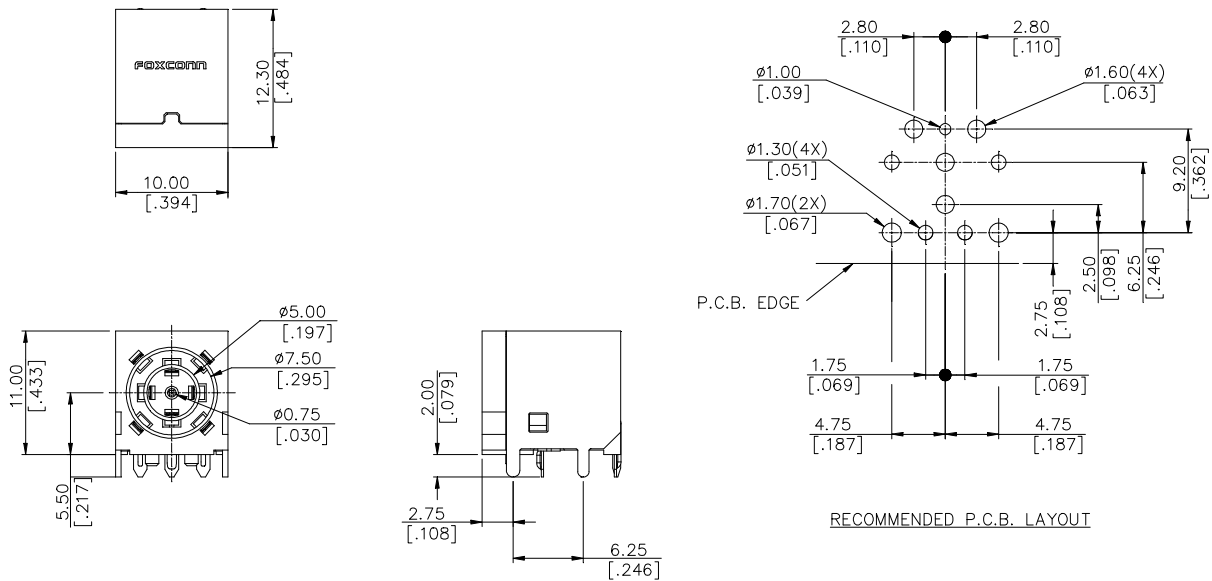

ORDERING INFORMATION

PRODUCT NO.: JP D 1 1 3 D - 509 - T R

