

SPECIFICATIONS

Modular Jack

Mechanical

Mating Force: 4 LBS MAX. Unmating Force: 4 LBS MAX. Durability: 1000 Cycles

Electrical

Current Rating: 1.5A MAX.

Contact Resistance: 30 mOHMS MAX. INITIAL. Dielectric Withstanding Voltage: 1000VDC Insulation Resistance: $500M\Omega$ MIN.

0


Physical

Housing: High Temp. Thermoplastic, UL 94V-0 Molded Black


Contact: Phosphor Bronze **Shell:** STAINLESS STEEL

Operating Temperature: -40% to +100%


JFM Series MAGJACK 2X1 RJ45 10/1000 CONNECTOR, INLINE WITH



DRAWING

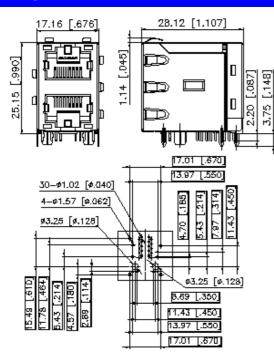

RECOMMENDED PRINTED CIRCUIT BOARD LAYOUT TOP VIEW (COMPONENT SIDE)

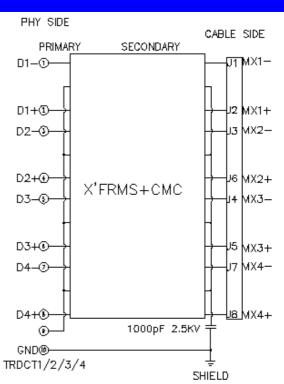

ORDERING INFORMATION

