

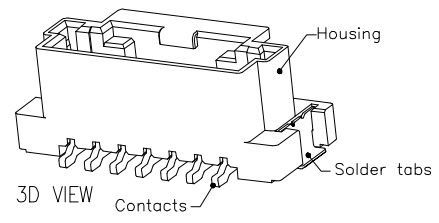
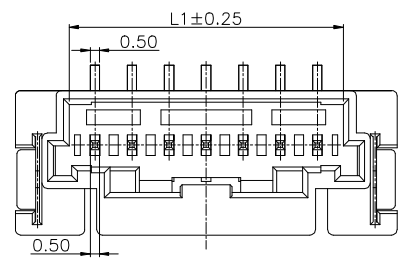
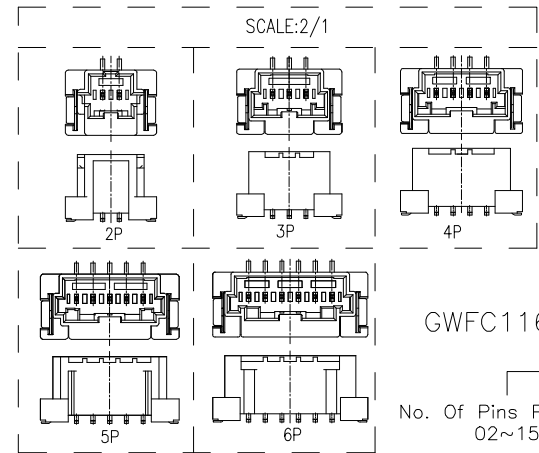
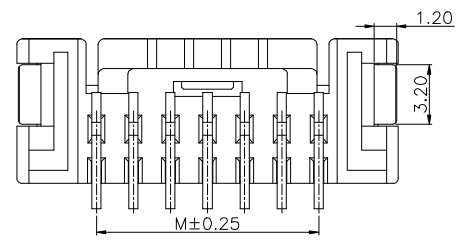


1 2 3 4 5 6 7 8 9


F
E
D
C
B
A



Specifications
 Current Rating:3.0A AC DC
 Voltage Rating:125V AC DC
 Insulation Resistance:1000MΩ Min.
 Dielectric Withstanding Voltage:500V AC/minute
 Contact Resistance:10mΩ Max.
 Operating Temperature:-40°C to +105°C
 Materials
 Contact Material: Phosphor Bronze
 Insulator Material:Nylon-9T,UL 94V-0
 Solder Tabs: Brass
 All materials must meet Greenconn hazardous substances control standards.

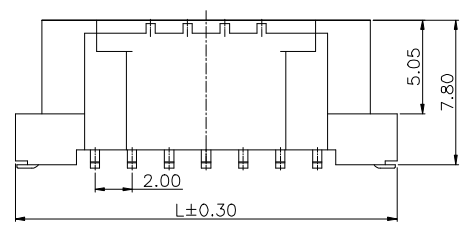

PIN	M	L	L1	PIN	M	L	L1
2	2.00	10.90	4.80	9	16.00	24.60	18.80
3	4.00	12.60	6.80	10	18.00	26.60	20.80
4	6.00	14.60	8.80	11	20.00	28.60	22.80
5	8.00	16.60	10.80	12	22.00	30.60	24.80
6	10.00	18.60	12.80	13	24.00	32.60	26.80
7	12.00	20.60	14.80	14	26.00	34.60	28.80
8	14.00	22.60	16.80	15	28.00	36.60	30.80

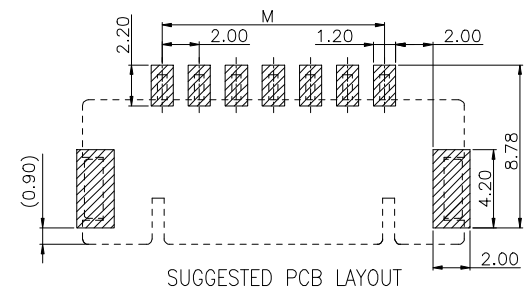

Ordering Information

GWFC116 - XX XX A 001 D X A X
 No. Of Pins Per Row 02~15 Standard Plating 22=Matte Tin Color 2=White Standard Packing D=Tape&Reel

 Website: www.greenconn.com E-mail: sales@greenconn.com	3RD.ANG PROJ.	GENERAL TOLERANCE		DESIGNED:	DATE:	DWG. NO. GWFC116-CA001DA	TITLE. 2.00mm PITCH 180° SMT WAFER
	 REV. A UNIT. mm SCALE. 1:1	 PAGE. 1/1	X.±5'				
		.X'±2'	.X±0.30	APPROVED:	DATE:		
		.XX'±1'	.XX±0.20				
		.XXX'±1'	.XXX±/				

AQ 1 2 3 4 5 6 7 8 9