





方型超微表面贴片式保险丝(速断型) SMD NANO FUSE (FAST-ACTING)

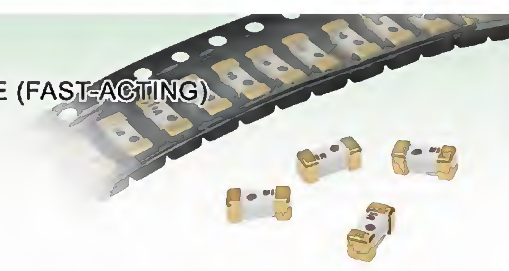


目录编号 CATALOG NO.	额定电流 CURRENT RATING	额定电压 VOLTAGE RATING	分断电流 INTERRUPTING RATING	安全认证 SAFETY APPROVALS			
				CQC	UR(CUR)	CSA	PSE
2N-0100L	100mA	125V	50A		●	○	
2N-0125L	125mA	125V	50A		●	○	
2N-0160L	160mA	125V	50A		●	○	
2N-0200L	200mA	125V	50A		●	○	
2N-0250L	250mA	125V	50A		●	○	
2N-0315L	315mA	125V	50A		●	○	
2N-0375L	375mA	125V	50A		●	○	
2N-0400L	400mA	125V	50A	○	●	○	
2N-0500L	500mA	125V	50A	○	●	○	
2N-0630L	630mA	125V	50A	○	●	○	
2N-0750L	750mA	125V	50A	○	●	○	
2N-0800L	800mA	125V	50A	○	●	○	
2N-010L	1A	125V	50A	○	●	○	○
2N-013L	1.25A	125V	50A	○	●	○	○
2N-015L	1.5A	125V	60A	○	●	○	○
2N-016L	1.6A	125V	50A	○	●	○	○
2N-020L	2A	125V	50A	○	●	○	○
2N-025L	2.5A	125V	50A	○	●	○	○
2N-030L	3A	125V	60A	○	●	○	○
2N-032L	3.15A	125V	50A	○	●	○	○
2N-035L	3.5A	125V	50A	○	●	○	○
2N-040L	4A	125V	50A	○	●	○	○
2N-050L	5A	125V	50A	○	●	○	○
2N-063L	6.3A	125V	50A	○	●	○	○
2N-070L	7A	125V	50A	○	●	○	○
2N-080L	8A	125V	50A	○	●	○	○
2N-100L	10A	125V	60A	○	●	○	○
2N-120L	12A	65V	50A	○	●	○	○
2N-150L	15A	65V	50A	○	●	○	○


尺寸 DIMENSIONS:



LAND PATTERN:



2N RoHS I-T CHARACTERISTICS CURVE
2N RoHS 电流-时间曲线图

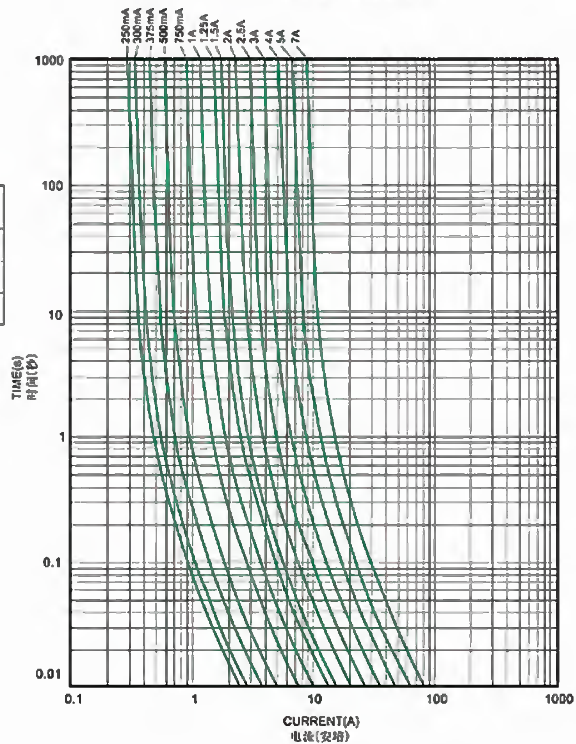

- DENOTES FOR APPROVED (●表示已取得认证)
- DENOTES FOR PENDING (○表示申请中)

电气特性: ELECTRICAL CHARACTERISTICS:

额定电流的% % of CURRENT RATING	熔断时间 BLOWING TIME
100%	最快4小时 4 hours Min. (100mA-15A)
200%	最慢60秒 60 seconds Max. (100mA-10A)
	最慢5秒 5 seconds Max. (12A-15A)

包装 PACKING:

1,000 PIECES TAPED AND REELED IN ONE BOX
每卷1,000只保险丝, 装入一个包装盒

包装盒尺寸
BOX SIZE

