

Φ2.4x7mm, RoHS Compliant & Pb-Free  
**MICROFUSE (SLOW-BLOW)**  
微型保险丝管 (慢断型)

**INTERRUPTING CAPACITY / 分断能力:**

30 amperes at 125V AC (100mA-7A)  
30 amperes at 250V AC (100mA-7A)  
100 amperes at 125V AC (1A-5A) PSE

**TECHNICAL PARAMETERS/ 技术参数:**

CATALOG NO. 目录编号	CURRENT RATING 额定电流	SAFETY APPROVALS 安全认证						REFERENCE (A <sup>2</sup> .Sec.) (RoHS) I <sup>2</sup> T 参考值
		CCC	CQC	UR(cUR)		CSA		
		H	H	H	L	H	L	L
20T-0375H/L	375mA			●	●	●	●	0.1614
20T-0400H/L	400mA			●	●	●	●	0.1713
20T-0500H/L	500mA	●		●	●	●	●	0.3374
20T-0600H/L	600mA			●	●	●	●	0.4662
20T-0630H/L	630mA	●		●	●	●	●	0.4890
20T-0750H/L	750mA			●	●	●	●	0.7074
20T-0800H/L	800mA	●		●	●	●	●	0.8908
20T-010H/L	1A	●		●	●	●	●	1.916
20T-012H/L	1.2A			●	●	●	●	2.061
20T-013H/L	1.25A	●		●	●	●	●	2.139
20T-015H/L	1.5A			●	●	●	●	3.982
20T-016H/L	1.6A	●		●	●	●	●	4.191
20T-020H/L	2A	●		●	●	●	●	7.803
20T-025H/L	2.5A	●		●	●	●	●	11.95
20T-030H/L	3A			●	●	●	●	14.11
20T-032H/L	3.15A	●		●	●	●	●	18.62
20T-035H/L	3.5A			●	●	●	●	20.89
20T-040H/L	4A	●		●	●	●	●	31.89
20T-050H/L	5A		●	●	●	●	●	39.51
20T-060H/L	6A			●	●	●	●	65.06
20T-063H/L	6.3A	●		●	●	●	●	68.31
20T-070H/L	7A			●	●	●	●	72.91


● DENOTES FOR APPROVED      ● 表示已取得安全认证  
H DENOTES FOR 250V (H 代表 250V)      L DENOTES FOR 125V (L 代表 125V)

**ELECTRICAL CHARACTERISTICS/ 电气特性:**

% of CURRENT RATING 额定电流的 %	BLOWING TIME 熔断时间	
100%	4 hours Min.	最快 4 小时
200%	1-60 seconds	1-60 秒
300%	0.2-3 seconds	0.2-3 秒
800%	0.02-0.1 second	0.02-0.1 秒

**PACKING/ 包装:**


1. INNER BOX/ 内盒: AMMO PACK

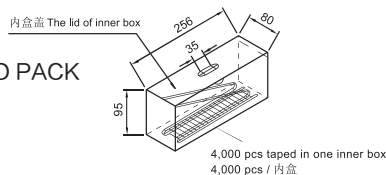

Unit 单位: mm

2. OUTER CARTON/ 外箱: 10 INNER BOXES / CARTON  
CARTON SIZE / 尺寸: L440x W270 x H230(mm)

**Dimensions/ 尺寸:**

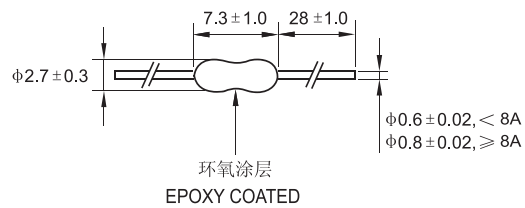

Standards/ 标准: UL 248-1, UL 248-14

Operating Temperature/ 工作温度: -55°C ~125°C

Storing Temperature/ 储存温度: -55°C ~85°C

Resistance to soldering heat/ 耐焊接热性: 260°C, 10s Max.

Solderability/ 可焊性: 245°C ± 5°C, 5s ± 0.5s

**20T AVERAGE I-T CHARACTERISTICS CURVE  
(FOR REFERENCE ONLY)**

**20T 平均 I-T 曲线图 (仅供参考)**

