




Your Power Safeguard™  
您的电路安全卫士

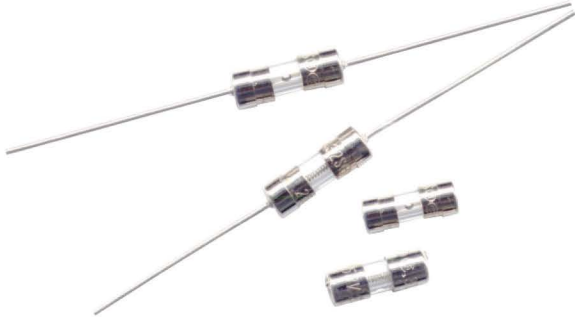

TECHNICAL PARAMETERS/ 技术参数:

CATALOG NO. 目录编号	CURRENT RATING 额定电流	SAFETY APPROVALS 安全认证				REFERENCE (A <sup>2</sup> .Sec.) (RoHS) I <sup>2</sup> T 参考值
		UL/cUL		CSA		
		H	L	H	L	
31S,32S 0100H/L	100mA		●	●	0.02127	
31S,32S 0125H/L	125mA	●	●	●	0.02058	
31S,32S 0150H/L	150mA	●	●	●	0.04566	
31S,32S 0160H/L	160mA	●	●	●	0.04362	
31S,32S 0200H/L	200mA	●	●	●	0.07841	
31S,32S 0250H/L	250mA	●	●	●	0.1531	
31S,32S 0300H/L	300mA	●	●	●	0.2431	
31S,32S 0315H/L	315mA	●	●	●	0.2107	
31S,32S 0350H/L	350mA	●	●	●	0.5416	
31S,32S 0375H/L	375mA	●	●	●	0.5196	
31S,32S 0400H/L	400mA	●	●	●	0.4975	
31S,32S 0500H/L	500mA	●	●	●	0.7752	
31S,32S 0600H/L	600mA	●	●	●	0.9302	
31S,32S 0630H/L	630mA	●	●	●	1.623	
31S,32S 0750H/L	750mA	●	●	●	1.508	
31S,32S 0800H/L	800mA	●	●	●	0.4494	
31S,32S 010H/L	1A	●	●	●	1.104	
31S,32S 012H/L	1.2A	●	●	●	1.548	
31S,32S 013H/L	1.25A	●	●	●	1.612	
31S,32S 015H/L	1.5A	●	●	●	2.534	
31S,32S 016H/L	1.6A	●	●	●	2.940	
31S,32S 020H/L	2A	●	●	●	5.579	
31S,32S 023H/L	2.25A	●	●	●	6.276	
31S,32S 025H/L	2.5A	●	●	●	3.375	
31S,32S 030H/L	3A	●	●	●	5.342	
31S,32S 032H/L	3.15A	●	●	●	5.854	
31S,32S 035H/L	3.5A	●	●	●	7.045	
31S,32S 040H/L	4A	●	●	●	11.05	
31S,32S 050H/L	5A	●	●	●	18.64	
31S,32S 060H/L	6A	●	●	●	29.38	
31S,32S 063H/L	6.3A	●	●	●	32.13	
31S,32S 070H/L	7A	●	●	●	44.28	
31S,32S 080H/L	8A	●	●	●	56.69	
31S,32S 090H/L	9A	●	●	●	82.90	
31S,32S 100H/L	10A	●	●	●	109.1	
31S,32S 120H/L	12A				150.7	
31S,32S 150H/L	15A				337.4	

● DENOTES FOR APPROVED    ● 表示已取得安全认证  
H DENOTES FOR 250V        H 代表 250V  
L DENOTES FOR 125V        L 代表 125V  
cUL APPROVAL IS EQUIVALENT TO CSA APPROVAL cUL  
认证同等 CSA 认证使用

Standards/ 标准: UL 248-1, UL 248-14  
Operating Temperature/ 工作温度: -55°C ~125°C  
Storing Temperature/ 储存温度: -55°C ~85°C  
Resistance to soldering heat/ 耐焊接热性: 260°C, 10s Max.  
Solderability/ 可焊性: 245°C ± 5°C, 5s ± 0.5s

**31S, 32S**      
Φ 3.6x10mm, RoHS Compliant & Pb-Free  
**GLASS TUBE MICROFUSE (SLOW-BLOW)**  
玻璃保险丝管 (慢断型)

**INTERRUPTING CAPACITY / 分断能力:**


50 amperes at 125V AC (100mA-15A)  
50 amperes at 250V AC (100mA-15A)

**ELECTRICAL CHARACTERISTICS/ 电气特性:**

% of CURRENT RATING 额定电流的 %	BLOWING TIME 熔断时间	
100%	4 hours Min.	最快 4 小时
200%	1-60 seconds	1-60 秒

**Dimensions/ 尺寸:**

Unit 单位: mm

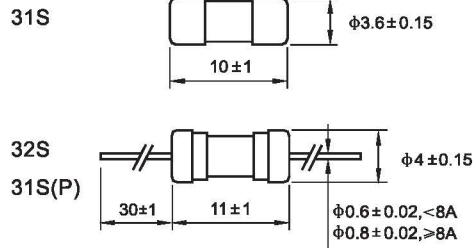

**31S/32S AVERAGE I-T CHARACTERISTICS CURVE (FOR REFERENCE ONLY)**

**31S/32S 平均 I-T 曲线图 (仅供参考)**

