

Kingbright





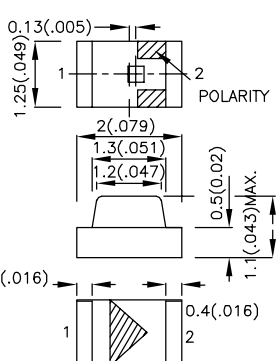



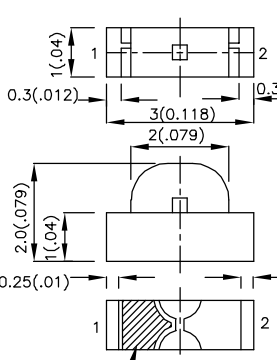


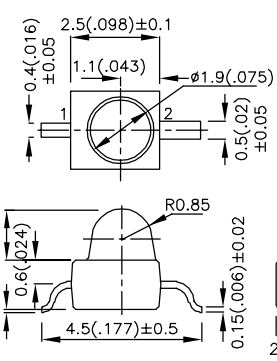



Optoelectronic Components

INFRARED & PHOTOTRANSISTOR


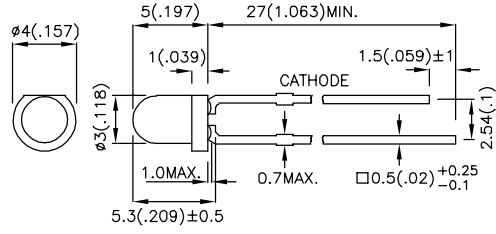

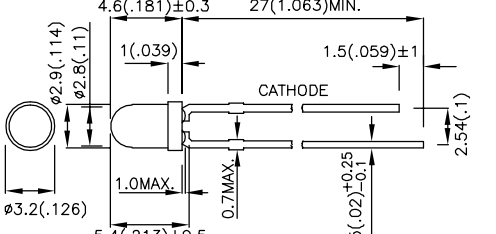

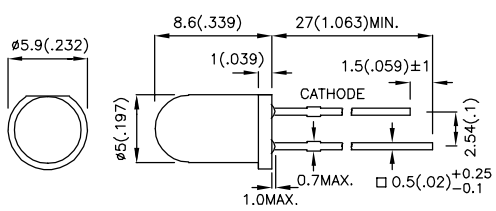
Infrared Emitting Diode	85
Phototransistor	87

LIGHT PIPE	89
CLUSTER	90

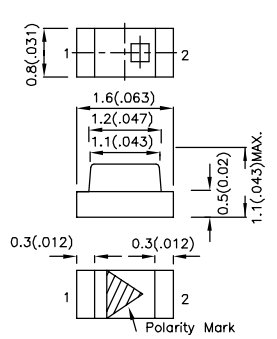INFRARED EMITTING DIODE

Part Number	Material	λ_P (nm)	Lens Type	Iv (mcd) @20mA *50mA		Viewing Angle	Dimension
				Min.	Typ.		
KP-1608F3C	GaAs	940	water clear	0.8	2	120°	1.6mm x 0.8mm x 1.1mm (0603)   KP-1608F3C F3 1  2 SF4 1  2 Units : mm(inch) Tolerance : ±0.1(0.004)
KP-1608SF4C	GaAlAs	880	water clear	0.8	1.5	120°	
KP-2012F3C	GaAs	940	water clear	0.8	2	120°	2.0mm x 1.25mm x 1.1mm (0805)   KP-2012F3C F3 1  2 SF4 1  2 Units : mm(inch) Tolerance : ±0.1(0.004)
KP-2012SF4C	GaAlAs	880	water clear	0.8	1.5	120°	
KPA-3010F3C	GaAs	940	water clear	0.8	2	120°	3.0mm x 1.0mm x 2.0mm (1104 Right Angle)   KPA-3010F3C F3 1  2 Units : mm(inch) Tolerance : ±0.15(0.006)
KM2520F3C03	GaAs	940	water clear	3	8	20°	2mm Subminiature IR Emitter   KM2520F3C03 F3 1  2 SF4 1  2 Units : mm(inch) Tolerance : ±0.25(0.01)
KM2520SF4C03	GaAlAs	880	water clear	2	4	20°	

INFRARED EMITTING DIODE

Part Number	Material	λ_P (nm)	Lens Type	Po (mW/sr) @20mA *50mA		Viewing Angle 2 θ 1/2	Dimension
				Min.	Typ.		
L-34F3C	GaAs	940	water clear	3	8	50°	T-1 (3mm) Round  L-34F3C  Units : mm(inch) Tolerance : ±0.25(0.01)
L-34F3BT	GaAs	940	blue transparent	*8	*15	50°	
L-34SF4C	GaAlAs	880	water clear	3	16	50°	
L-34SF4BT	GaAlAs	880	blue transparent	*5	*20	50°	
L-7104F3C	GaAs	940	water clear	3	8	34°	
L-7104F3BT	GaAs	940	blue transparent	*12	*25	34°	
L-7104SF6C	GaAlAs	860	water clear	7	12	34°	T-1 3/4 (5mm) Round  L-7104F3C  Units : mm(inch) Tolerance : ±0.25(0.01)
L-7104SF6BT	GaAlAs	860	blue transparent	*12	*30	34°	
L-7104SF7C	GaAlAs	850	water clear	10	30	34°	
L-7104SF7BT	GaAlAs	850	blue transparent	*15	*40	34°	
L-7113F3C	GaAs	940	water clear	8	20	20°	
L-7113F3BT	GaAs	940	blue transparent	*25	*50	20°	
L-7113SF4C	GaAlAs	880	water clear	6	15	20°	T-1 3/4 (5mm) Round  L-7113F3C  Units : mm(inch) Tolerance : ±0.25(0.01)
L-7113SF4BT	GaAlAs	880	blue transparent	*12	*25	20°	
L-7113SF6C	GaAlAs	860	water clear	18	40	20°	
L-7113SF6BT	GaAlAs	860	blue transparent	*55	*100	20°	
L-7113SF7C	GaAlAs	850	water clear	12	30	20°	
L-7113SF7BT	GaAlAs	850	blue transparent	*40	*90	20°	

PHOTOTRANSISTOR

Part Number	Lens Type
KP-1608P1C	water clear
KP-2012P3C	water clear
KP-3216P3C	water clear
KPA-3010P3C	water clear

Electrical And Radiant Characteristics $T_A = 25^\circ\text{C}$

Parameter	Symbol	Part Number	Min.	Typ.	Max.	Unit	Test Condition
Collector-to-Emitter Breakdown Voltage	$V_{BR\ CE0}$	-	30	-	-	V	$I_C=100\mu\text{A}$ $E_e=0\text{mW/cm}^2$
Emitter-to-Collector Breakdown Voltage	$V_{BR\ E0C}$	-	5	-	-	V	$I_E=100\mu\text{A}$ $E_e=0\text{mW/cm}^2$
Collector-to-Emitter Saturation Voltage	$V_{CE(SAT)}$	-	-	-	0.8	V	$I_C=2\text{mA}$ $E_e=20\text{mW/cm}^2$
Collector Dark Current	I_{CEO}	-	-	-	100	nA	$V_{CE}=10\text{V}$ $E_e=0\text{mW/cm}^2$
Rise Time (10% to 90%)	T_R	-	-	15	-	μs	$V_{CE}=5\text{V}$ $I_C=1\text{mA}$ $R_L=1\text{K}\Omega$
Fall Time (90% to 10%)	T_F	-	-	15	-	μs	
On State Collector Current	$I_{(ON)}$	KP-1608P1C	0.1	0.3	-	mA	$V_{CE}=5\text{V}$, $E_e=1\text{mW/cm}^2$ $\lambda=940\text{nm}$
		KP-2012P3C	0.2	0.4	-	mA	
		KP-3216P3C	0.2	0.4	-	mA	
		KPA-3010P3C	0.2	0.4	-	mA	

Absolute Maximum Rating $T_A = 25^\circ\text{C}$

Parameter	Maximum Ratings
Collector-to-Emitter Voltage	30V
Emitter-to-Collector Voltage	5V
Power Dissipation at (or below) 25°C Free Air Temperature	100mW
Operating Temperature Range	$-40^\circ\text{C} \sim +85^\circ\text{C}$
Storage Temperature Range	$-40^\circ\text{C} \sim +85^\circ\text{C}$

Dimension

1.6mm x 0.8mm x 1.1mm (0603)

Units : mm(inch)
Tolerance : $\pm 0.1(0.004)$

2.0mm x 1.25mm x 1.1mm (0805)

Units : mm(inch)
Tolerance : $\pm 0.1(0.004)$


3.2mm x 1.6mm x 1.1mm (1206)

Units : mm(inch)
Tolerance : $\pm 0.2(0.008)$

3.0mm x 1.0mm x 2.0mm (1104)


Units : mm(inch)
Tolerance : $\pm 0.15(0.006)$

PHOTOTRANSISTOR

Part Number	Lens Type	Dimension
L-3DP3BT	blue transparent	T-1 (3mm) Phototransistor  L-3DP3BT
L-7113P3C	water clear	


Electrical And Radiant Characteristics TA =25°C

Parameter	Symbol	Part Number	Min.	Typ.	Max.	Unit	Test Condition
Collector-to-Emitter Breakdown Voltage	$V_{BR\ CE0}$	-	30	-	-	V	$I_C=100\mu A$ $E_e=0mW/cm^2$
Emitter-to-Collector Breakdown Voltage	$V_{BR\ ECO}$	-	5	-	-	V	$I_E=100\mu A$ $E_e=0mW/cm^2$
Collector-to-Emitter Saturation Voltage	$V_{CE(SAT)}$	-	-	-	0.8	V	$I_C=2mA$ $E_e=20mW/cm^2$
Collector Dark Current	I_{CEO}	-	-	-	100	nA	$V_{CE}=10V$ $E_e=0mW/cm^2$
Rise Time (10% to 90%)	T_R	-	-	15	-	μs	$V_{CE}=5V$ $I_C=1mA$ $R_L=1K\Omega$
Fall Time (90% to 10%)	T_F	-	-	15	-	μs	
On State Collector Current	$I_{(ON)}$	L-3DP3BT	0.1	0.2	-	mA	$V_{CE}=5V$, $E_e=1mW/cm^2$ $\lambda=940nm$
		L-7113P3C	0.5	2.5	-	mA	

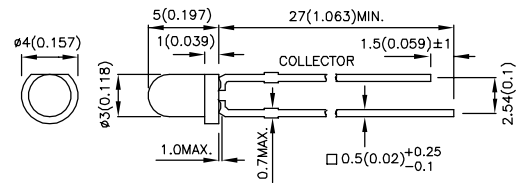

Units : mm(inch)
Tolerance : ±0.25(0.01)

T-1 3/4 (5mm) Phototransistor

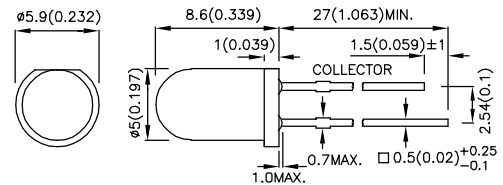

Units : mm(inch)
Tolerance : ±0.25(0.01)


Absolute Maximum Rating TA =25°C

Parameter	Maximum Ratings
Collector-to-Emitter Voltage	30V
Emitter-to-Collector Voltage	5V
Power Dissipation at (or below) 25°C Free Air Temperature	100mW
Operating Temperature Range	-40°C ~ +85°C
Storage Temperature Range	-40°C ~ +85°C
Lead Soldering Temperature (>5mm For 5sec)	260°C

KL-05




KL-05

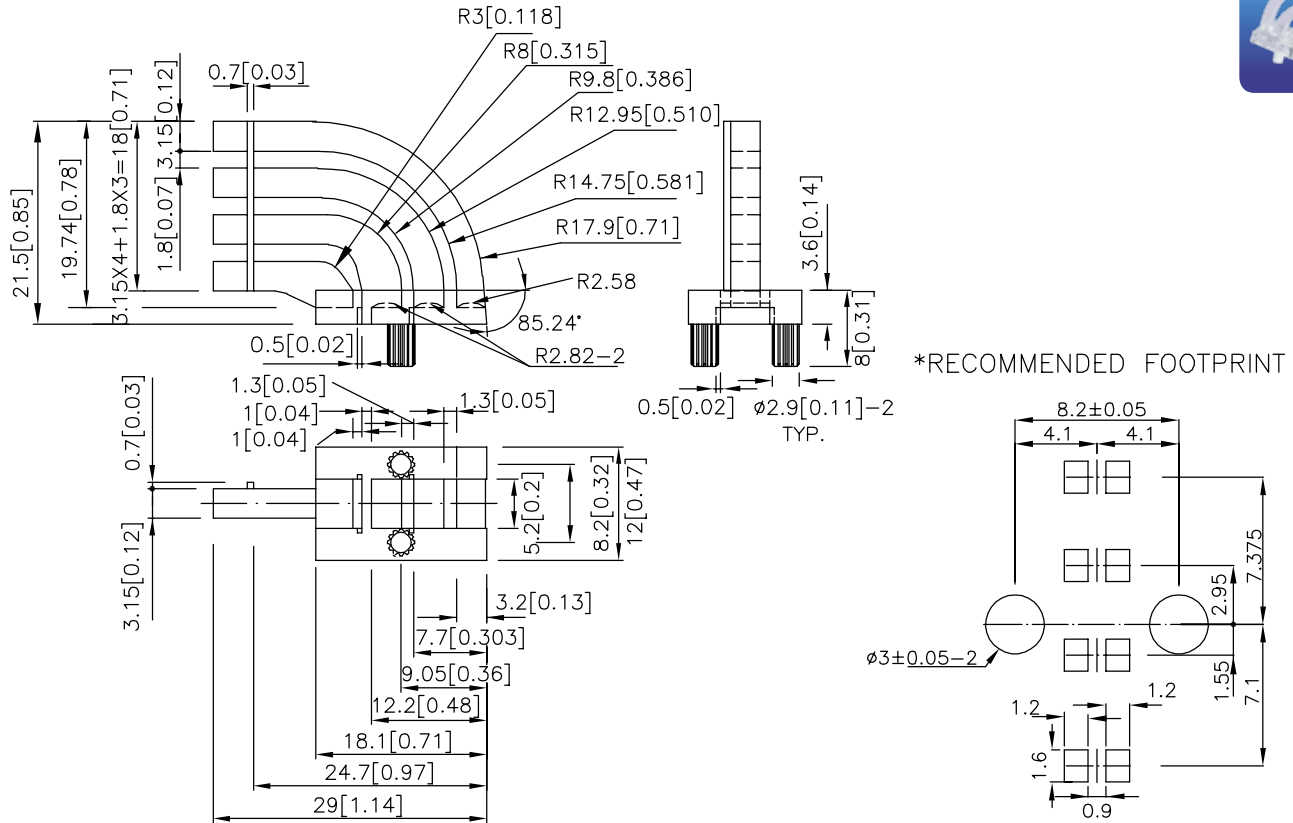

KL-07LS



KL-07LS

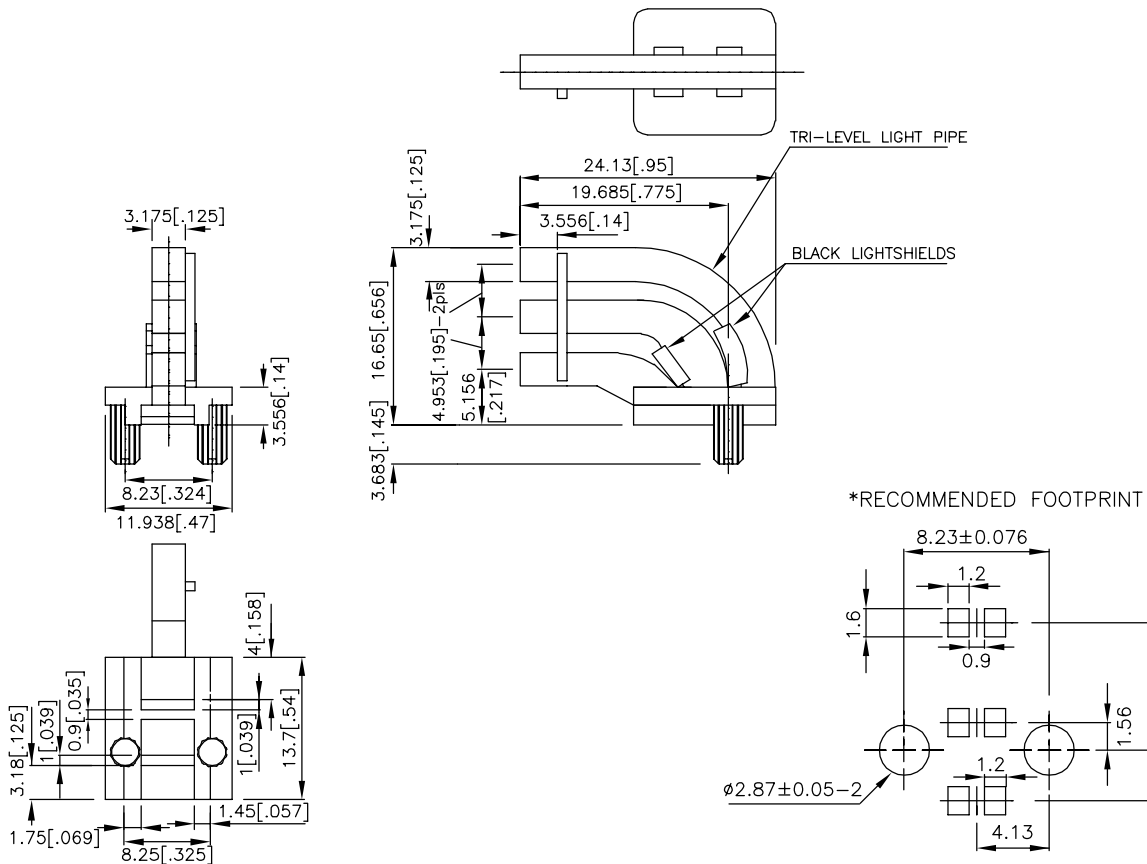


NOTES:

1. All dimensions are in millimeters (inches).
2. Tolerance is ±0.25mm (0.01") unless otherwise noted.

28mmX28mm


Part Number	Material	λD (nm)	Lens Type	Iv (mcd)		Viewing Angle	IF(mA)
				Min.	Typ.		
BL0709-18-462	GaAlAs	640	water clear	400	800	40°	20
	InGaN	465	water clear	1600	3000	40°	20
	GaP	568	water clear	1200	2400	40°	40

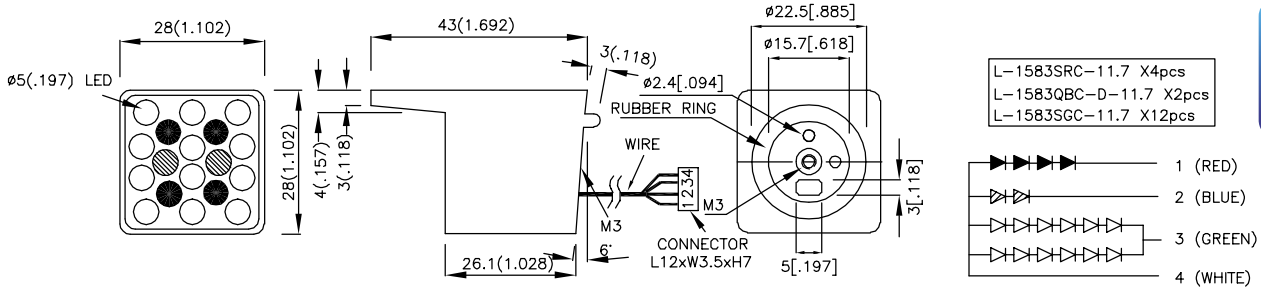

BL0709-18-462

26mm


Part Number	Material	λD (nm)	Lens Type	Iv (mcd)		Viewing Angle	IF(mA)
				Min.	Typ.		
BL0102-14-34	GaAlAs	640	water clear	600	1200	40°	20
	GaP	568	water clear	800	1600	40°	40

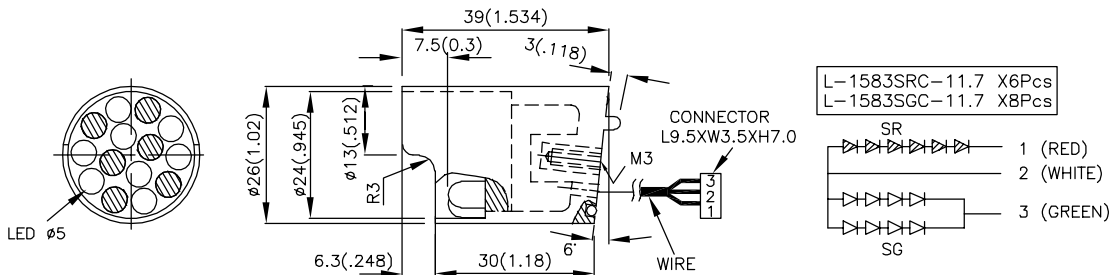

BL0102-14-34

52mm

Part Number	Material	λD (nm)	Lens Type	Iv (mcd)		Viewing Angle	IF(mA)
				Min.	Typ.		
BL0307-50-360	AlGaInP	570	water clear	15000	25000	40°	200
BL0307-50-374	AlGaInP	590	water clear	45000	75000	40°	200
BL0307-50-433	AlGaInP	630	water clear	12300	23000	40°	200

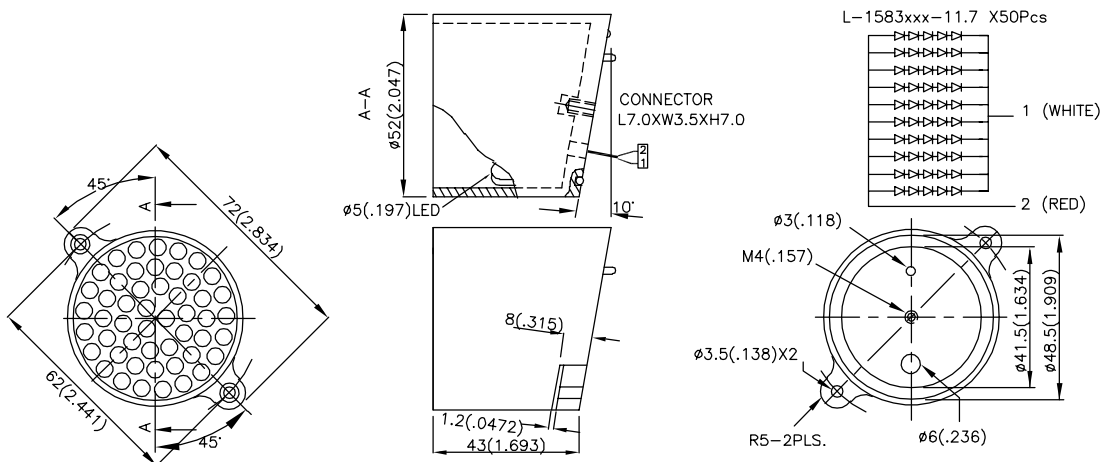

BL0307-50-xxx