


# Common Mode Inductor

Parameter	Min.	Max.	Units
Inductance*	5.0		mH
DCR		250	mΩ
Current		1.2	A <sub>RMS</sub>
Leakage Inductance*		42	μH
Interwinding capacitance		8	pF
SRF	580 kHz Typ.		


\*Inductance tested at 100mV<sub>RMS</sub> and 10 kHz

Rated Voltage 250 VAC  
 Hipot (Isolation) 3000 VAC  
 Insulation Resistance 100MΩ  
 Temperature Rise 40°C Max.  
 Operating Temperature Range -20°C to +115°C

Schematic Diagram

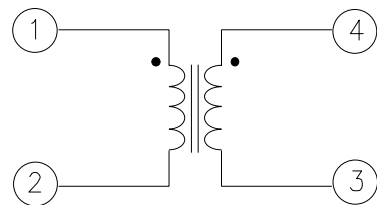

Physical Dimensions  
inches (mm)

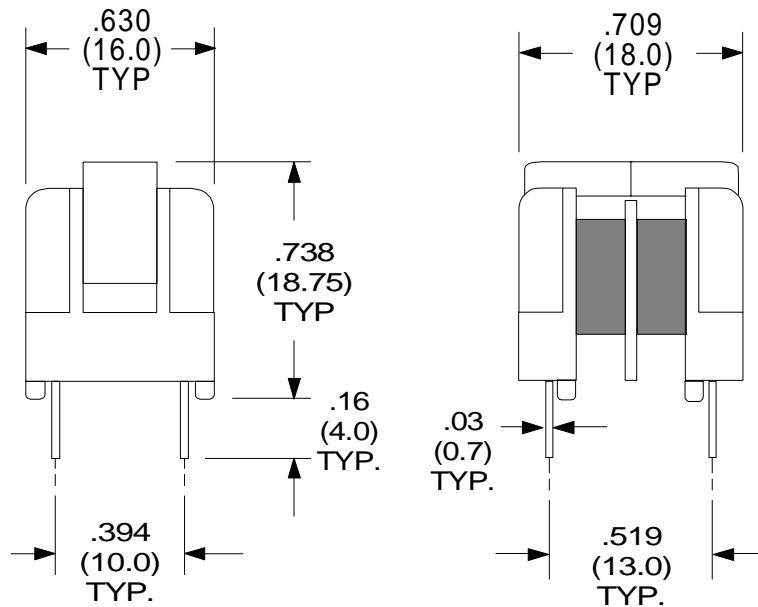

RHOMBUS P/N: <b>L-14264</b>	
CUST P/N:	NAME:
DATE: <b>4/22/02</b>	SHEET: 1 OF 1