

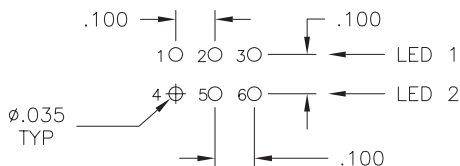
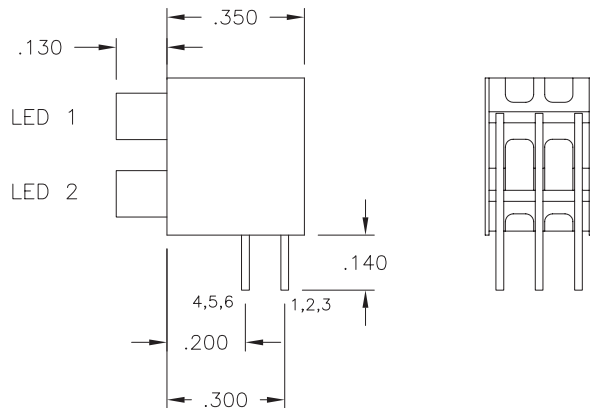
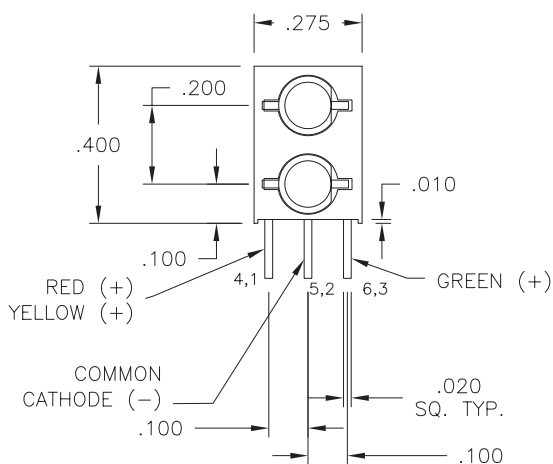


LTR	REVISION	DATE	APPD
F		04-11-06	MM



RECOMMENDED PAD LAYOUT



LEDTRONICS PART NO.	L.E.D. RADIATION COLOR	L.E.D. APPEARANCE	ELECTRO-OPTICAL CHARACTERISTICS (Ta=25°C)				
			If mA	Iv mcd typ	Vf=V typ/max	VIEW ANGLE 2θ1/2	λ.Peak nm
21PCF130TWRG3-3	HI-EFF RED	WHITE	20	4	2.0/2.6	130	635
	HI-EFF GREEN	DIFFUSED	20	4	2.1/2.6	130	568
21PCF130TWYG4-3	YELLOW	WHITE	20	8	2.1/2.6	130	585
	HI-EFF GREEN	DIFFUSED	20	10	2.2/2.6	130	568

LED[®]
LEDTRONICS,™ INC.
23105 KASHIWA COURT
TORRANCE, CA 90505

-PROPRIETARY-
This document contains Proprietary information of LEDTRONICS,™ INC. It may not be copied, used or disclosed for any purpose without the prior express written consent of LEDTRONICS,™ INC.

.XXX ± .010 TOLERANCE PER ANSI-Y14.5
.XX ± .025 (UNLESS OTHERWISE STATED)
ANGLES ± 0°,30'
FRACT. ± 1/32

TITLE
21PCF130TWXGX-3

DWG NO	SCALE	SHEET	DATE
SDPC0387	2:1	1 OF 1	10-18-99
CODE IDENT NO. 8Z410	DWG BY SMA	CHK BY PL 04-12-06	QA GZ 04-11-06
MFG	CUSTOMER		