
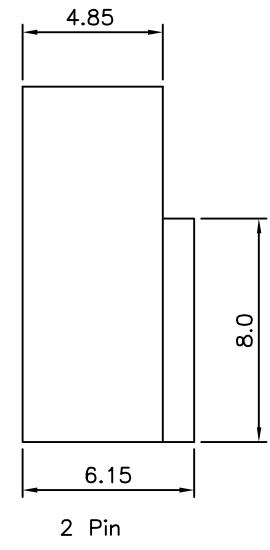
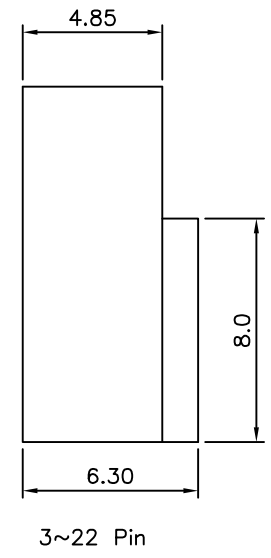


SPECIFICATION
 Current Rating:4A AC/DC
 Voltage Rating:250V AC/DC
 Withstand Voltage:1000V AC/Minute
 △ Contact Resistance:10 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min.
 Temperature Range:-25°C~+85°C
 △ Insulator:PA66(UL94V-0),Milky Yellow
 RoHS Compliant

MK XX H - H
 (1) (2) (3) (4)
 (1) MK:2.54 MK Series
 (2) XX:No. Of Position
 (3) H:Female Housing
 (4) H:RoHS Compliant

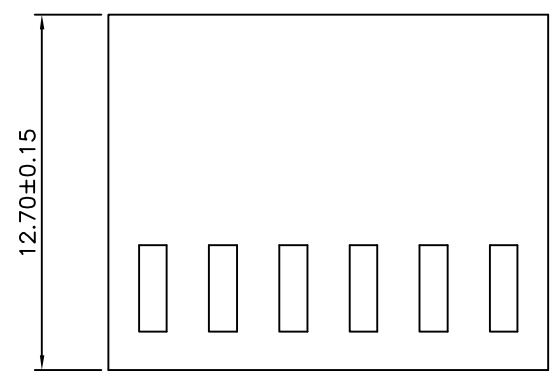

Pin	A	B	Pin	A	B
* 2	2.54	5.60	13	30.48	33.54
* 3	5.08	8.14	14	33.02	36.08
* 4	7.62	10.68	15	35.56	38.62
* 5	10.16	13.22	16	38.10	41.16
* 6	12.70	15.76	17	40.64	43.70
* 7	15.24	18.30	18	43.18	46.24
* 8	17.78	20.84	19	45.72	48.78
* 9	20.32	23.38	20	48.26	51.32
* 10	22.86	25.92	21	50.80	53.86
11	25.40	28.46	22	53.34	56.40
12	27.94	31.00			

The Mark Of "*" Are Tooled Already

AUK A MEMBER OF AUK GROUP
太聯事業股份有限公司
AUK CONTRACTORS CO., LTD.

CATEGORY		APPROVED BY EMILY	
PART No. MKXXH-H		CHECKED BY HZF	
DRAWING No. MKXXH-H		DRAWING BY SONG	
SCALE NONE	REV. A1	UNIT mm	

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
 .X ±0.25
 .XX ±0.15
 .XXX ±0.08

NO.	REV.	REVISIONS	CHK	DATE
△ A1		Modify Spec.	HZF	09/10/2013
△ A0		NEW RELEASE	HZF	03/14/2012