

0603, RoHS Compliant & Pb-Free SURFACE MOUNT CHIP FUSE (SLOW-BLOW) 表面贴装片式保险丝 (慢断型)

TECHNICAL PARAMETERS/ 技术参数:

CATALOG NO. 目录编号	CURRENT RATING 额定电流	SAFETY APPROVALS 安全认证			
		UR		cUR	
		L1	L2	L1	L2
06T-010L	1A	●		●	
06T-013L	1.25A	●		●	
06T-015L	1.5A	●		●	
06T-016L	1.6A	●		●	
06T-020L	2A	●		●	
06T-025L	2.5A	●		●	
06T-030L	3A	●		●	
06T-032L	3.15A	●		●	
06T-035L	3.5A	●		●	
06T-040L	4A	●		●	
06T-050L	5A	●		●	

- DENOTES FOR APPROVED ● 表示已取得安全认证
- L1 DENOTES FOR 32V L1 代表 32V
- L2 DENOTES FOR 63V L2 代表 63V

ELECTRICAL CHARACTERISTICS/ 电气特性:


% of CURRENT RATING 额定电流的 %	BLOWING TIME 熔断时间	
100%	4 hours Min.	最快 4 小时
200%	1 second Min. 120 seconds Max.	最快 1 秒 最慢 120 秒
300%	0.05 seconds Min. 3 seconds Max.	最快 0.05 秒 最慢 3 秒
800%	0.0005 seconds Min. 0.05 seconds Max.	最快 0.0005 秒 最慢 0.05 秒

PACKING/ 包装:

5,000 PIECES TAPED AND REELED IN ONE BOX

每卷 5,000 只保险丝, 装入一个包装盒

BOX SIZE/ 包装盒尺寸:

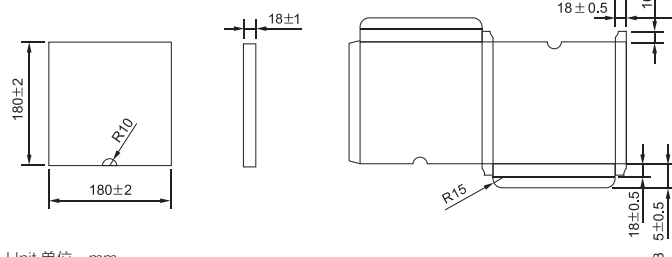

Unit 单位: mm


INTERRUPTING CAPACITY / 分断能力:

50A 32V AC (1A) 35A 32V AC (1.2A-5A)
50A 32V DC (1A) 35A 32V DC (1.2A-5A)


Dimensions/ 尺寸:

Unit 单位: mm

TOP VIEW/ 上面:

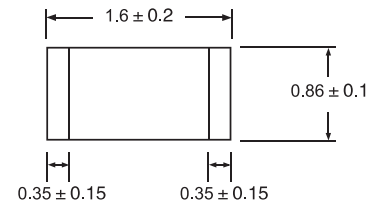

SIDE VIEW/ 侧面:



Standards/ 标准: UL 248-1, UL 248-14

Operating Temperature/ 工作温度: -55°C ~90°C

Storing Temperature/ 储存温度: -55°C ~85°C

Resistance to soldering heat/ 耐焊接热性: 260°C, 10s Max.

Solderability/ 可焊性: 235°C ± 5°C, 3.5s+0.5/-0s

06T AVERAGE I-T CHARACTERISTICS CURVE (FOR REFERENCE ONLY)

06T 平均 I-T 曲线图 (仅供参考)

