

Device coupler - FB-12SP - 2316310

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)

Device coupler for Foundation Fieldbus and PROFIBUS PA with terminal connections for 12 spurs connected to fieldbus end devices.




Why buy this product

- ✓ Connect up to 12 Foundation Fieldbus or PROFIBUS PA field devices
- ✓ Terminator preinstalled
- ✓ Provides current limiting short-circuit protection per spur
- ✓ Ex nA [nL, Ex nA [ic] or FISCO ic spur connections
- ✓ Single-sided plug configuration eliminates cable bend radius issues



Key Commercial Data

Packing unit	1 STK
GTIN	 4 046356 883597
GTIN	4046356883597
Weight per Piece (excluding packing)	500.000 g
Custom tariff number	85369095
Country of origin	United States

Technical data

Dimensions

Caption	FB-12SP dimensions
Width	254.1 mm
Height	112.5 mm
Depth	83.5 mm

Device coupler - FB-12SP - 2316310

Technical data

Ambient conditions

Ambient temperature (operation)	-50 °C ... 90 °C
Ambient temperature (storage/transport)	-50 °C ... 90 °C
Altitude	2000 m
Degree of protection	IP20

General

Standards/regulations	EN 60079-0:2011; EN 60079-11:2012; EN 60079-15:2005; EN 60079-15:2010
	IEC 60079-0:2011; IEC 60079-11:2011; IEC 60079-15:2005; IEC 60079-15:2010
Mounting position	On horizontal and vertical DIN rail NS 35 in acc. with EN 60715
Net weight	444 g
MTTF	723 Years (25 degrees C)
Conformance	CE-compliant, additionally EN 61326
Fieldbus Foundation	FF-846

Power supply

Supply voltage range	10.5 V DC ... 32 V DC (input on trunk line side)
Typical current consumption	6.5 mA
Conductor cross section flexible max.	0.20 mm ²
Conductor cross section flexible min.	2.50 mm ²
Conductor cross section solid max.	0.20 mm ²
Conductor cross section solid min.	2.50 mm ²
Max. AWG conductor cross section, flexible	12
Min. AWG conductor cross section, flexible	24
Conductor cross section AWG max.	12
Conductor cross section AWG min.	24

Serial interface

Interface 1	Foundation Fieldbus and PROFIBUS PA Segment
No. of ports	12
Connection method	Pluggable COMBICON screw connection for each spur
Termination resistor	100 Ω (external removable plug)
	100 Ω, external removable plug included
Conductor cross section solid min.	0.2 mm ²
Conductor cross section solid max.	2.5 mm ²
Conductor cross section flexible min.	0.2 mm ²
Conductor cross section flexible max.	2.5 mm ²
Conductor cross section AWG min.	24
Conductor cross section AWG max.	12

Device coupler - FB-12SP - 2316310

Technical data

Serial interface

Output nominal voltage	≤ 32 V (each spur)
Output current	38 mA
Inductance L _i	4 μH
Max. output voltage U _o	U _{in} (spur)

Safety data

Input voltage U _i	32 V (IIB (C/D))
Max. output voltage U _o	U _{in} (spur)
Max. output current I _o	56 mA (spur)
Max. output power P _o	1.792 W
Group	IIC/IIB
Max. external capacity C _o	80 nF
Additional text	spur
Group	IIC/IIB
Max. external inductivity L _o	0.26 mH
Additional text	spur
ATEX	Sira 13ATEX4247X; # II 3(3)G Ex nA [ic] IIC T4 Gc, Entity/FISCO ic spurs Ex nA [nL] IIC T4 Gc; # II 3G Ex ic IIC T4 Gc, FISCO ic
IECEX	IECEX SIR 13.0089X; Ex nA [ic] IIC T4 Gc, Entity/FISCO ic spurs; Ex nA [nL] IIC T4 Gc; Ex ic IIC T4 Gc, FISCO ic
UL, USA	Class I, Zone 2; AEx nA[ic] IIC T4, Entity/FISCO spurs Class I, Div. 2, Groups A, B, C, D; T4
CSA, USA/Canada	Class I, Div. 2, Groups A, B, C, D; Ex nA [nL] IIC T4; Class I, Zone 2, AEx nA [nC] IIC T4
Safety-related maximum voltage U _m	17.5 V (in acc. with EN 60079-11)

Standards and Regulations

Type of test	Corrosive resistance in acc. to ANSI-ISA 71.04-1985 - Severity level G3
Standards/regulations	EN 60079-0:2011; EN 60079-11:2012; EN 60079-15:2005; EN 60079-15:2010
	IEC 60079-0:2011; IEC 60079-11:2011; IEC 60079-15:2005; IEC 60079-15:2010
Flammability rating according to UL 94	V0
Shock	30g, 11 ms
Vibration (operation)	5g, 10 ... 150 Hz
Conformance	CE-compliant, additionally EN 61326
Fieldbus Foundation	FF-846
Group	IIC/IIB
	IIC/IIB

Device coupler - FB-12SP - 2316310

Technical data

Standards and Regulations


ATEX	Sira 13ATEX4247X; # II 3(3)G Ex nA [ic] IIC T4 Gc, Entity/FISCO ic spurs Ex nA [nL] IIC T4 Gc; # II 3G Ex ic IIC T4 Gc, FISCO ic
IECEX	IECEX SIR 13.0089X; Ex nA [ic] IIC T4 Gc, Entity/FISCO ic spurs; Ex nA [nL] IIC T4 Gc; Ex ic IIC T4 Gc, FISCO ic
UL, USA	Class I, Zone 2; AEx nA[ic] IIC T4, Entity/FISCO spurs Class I, Div. 2, Groups A, B, C, D; T4
CSA, USA/Canada	Class I, Div. 2, Groups A, B, C, D; Ex nA [nL] IIC T4; Class I, Zone 2, AEx nA [nC] IIC T4

Environmental Product Compliance

China RoHS	Environmentally Friendly Use Period = 50
	For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration"


Drawings

Dimensional drawing

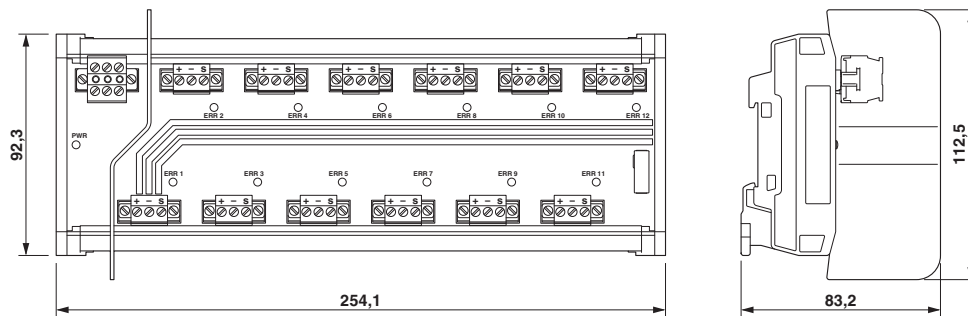

FB-12SP dimensions

Circuit diagram

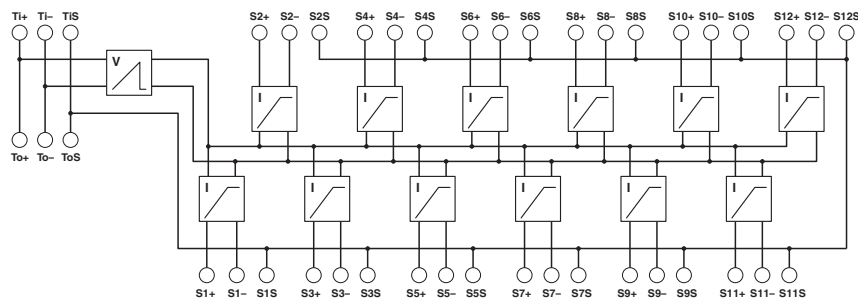

Connection diagram: FB-12SP

Device coupler - FB-12SP - 2316310

Classifications

eCl@ss

eCl@ss 4.0	27240490
eCl@ss 4.1	27240490
eCl@ss 5.0	27242208
eCl@ss 5.1	27242208
eCl@ss 6.0	27242208
eCl@ss 7.0	27242208
eCl@ss 8.0	27242610
eCl@ss 9.0	27242610

ETIM

ETIM 4.0	EC001423
ETIM 5.0	EC001600
ETIM 6.0	EC001604

UNSPSC

UNSPSC 6.01	30211506
UNSPSC 7.0901	39121008
UNSPSC 11	39121008
UNSPSC 12.01	39121008
UNSPSC 13.2	32151602

Approvals

Approvals

Approvals

UL Listed / cUL Listed / cULus Listed

Ex Approvals

IECEx / UL Listed / cUL Listed / ATEX / CSA / CSAus / cULus Listed

Approval details

UL Listed		http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm	FILE E 330267
-----------	--	---	---------------

Device coupler - FB-12SP - 2316310

Approvals

cUL Listed		http://database.ul.com/cgi-bin/XYVV/template/LISEXT/1FRAME/index.htm	FILE E 330267
------------	--	---	---------------

cULus Listed			
--------------	--	--	--

Accessories

Accessories

Base element

Surge protection base element - PT 4+F-BE - 2839415



Base element for protective plug PT with protective circuit for a 4-wire floating signal circuit, gas-filled surge arrester between the connections 3-4 (GND) and 9-10, for mounting on NS 35/7.5 and NS35/15, housing width: 17.5 mm

Device coupler

Power supply unit - FB-PS-MB-25DSUB/EX - 2316146



Four-channel, redundant fieldbus power supply base. Host connection is a D-SUB 25 socket connector.

Power supply unit - FB-PS-MB-Y/EX - 2316148



Four-channel redundant fieldbus power supply base. Host connections are for two Yokogawa AKB336 20-pin cables.

Device coupler - FB-12SP - 2316310

Accessories

Power supply unit - FB-PS-MB-I/EX - 2316149



Four-channel, redundant fieldbus power supply base. Host connection is for an Invensys® D-SUB 25 cable.

Power distributor - FB-PS-BASE/EX - 2316145



Base for fieldbus power supply plugs. Provides redundancy when 2 plugs are installed. Redundancy is maintained across multiple bases via internal power buses. Additional internal bus provides remote indication.

Power supply

Power module - FB-PS-PLUG-24DC/28DC/0.5/EX - 2316132



Power supply plug for fieldbus system in hazardous locations. Provides 500 mA @ 28 V DC to couplers along the trunk.

Surge protection for information technology

Surge protection plug - PT 2X2-FF-ST - 2800755



PLUGTRAB, plug-in surge protection for Foundation Fieldbus
