

Φ 3.6x10mm, RoHS Compliant  
**SLOW-BLOW MICROFUSE**  
慢断型保险丝管

PATENT NO. 专利号: ZL 201320197259.0 ZL 201120540121.7

**INTERRUPTING CAPACITY / 分断能力:**


- 50 amperes at 125V/250V AC
- 35 amperes at 250V AC CQC
- 70 amperes at 265V AC (In practice)
- 110 amperes at 220V AC (In practice)

**TECHNICAL PARAMETERS/ 技术参数:**

CATALOG NO. 目录编号	CURRENT RATING 额定电流	SAFETY APPROVALS 安全认证						REFERENCE (A <sup>2</sup> .Sec.) (RoHS) I <sup>2</sup> T 参考值		
		CQC		TUV		UR(cUR)			PSE	KC
		H	H	L	H	L	H		L	H
25S-010H/L	1A	●	●	●	●	●	●	●	1.032	
25S-012H/L	1.2A		●	●	●	●	●	●	1.715	
25S-013H/L	1.25A	●	●	●	●	●	●	●	1.825	
25S-015H/L	1.5A		●	●	●	●	●	●	3.185	
25S-016H/L	1.6A	●	●	●	●	●	●	●	3.452	
25S-020H/L	2A	●	●	●	●	●	●	●	7.623	

- DENOTES FOR APPROVED ● 表示已取得安全认证
- H DENOTES FOR 250V H 代表 250V
- L DENOTES FOR 125V L 代表 125V

**Dimensions/ 尺寸:**

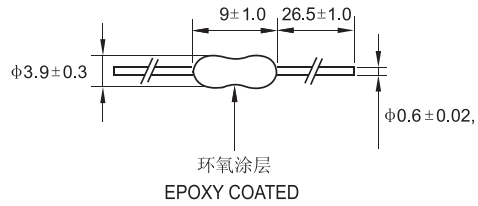


- Standards/ 标准: UL 248-1, UL 248-14, IEC 60127-1 IEC 60127-7
- Operating Temperature/ 工作温度: -55°C ~125°C
- Storing Temperature/ 储存温度: -55°C ~85°C
- Resistance to soldering heat/ 耐焊接热性: 260°C, 10s Max.
- Solderability/ 可焊性: 245°C ±5°C, 5s ±0.5s

**25S AVERAGE I-T CHARACTERISTICS CURVE (FOR REFERENCE ONLY)**

**25S 平均 I-T 曲线图 (仅供参考)**


**ELECTRICAL CHARACTERISTICS/ 电气特性:**

% of CURRENT RATING 额定电流的 %	BLOWING TIME 熔断时间	
100%	4 hours Min.	最快 4 小时
200%	60 seconds Max.	最慢 60 秒

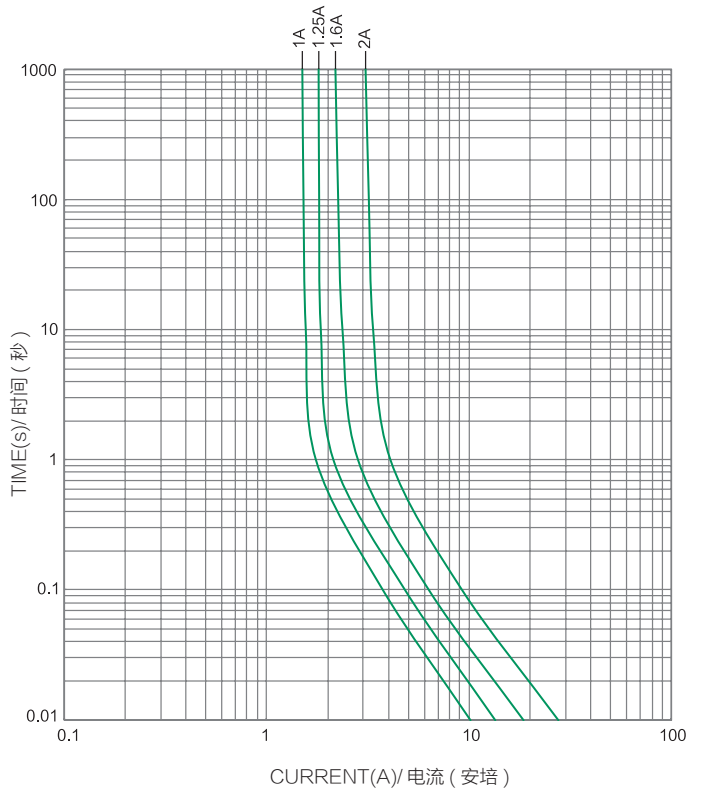

**PACKING/ 包装:**

1. INNER BOX/ 内盒: AMMO PACK

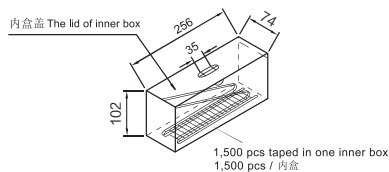

2. OUTER CARTON/ 外箱: 10 INNER BOXES / CARTON  
CARTON SIZE / 尺寸: L400x W270 x H220(mm)