


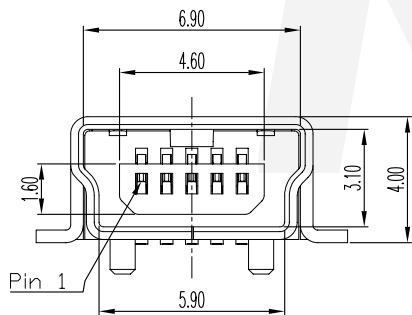


Specifications:

Current Rating:1.0A AC/DC
 Voltage Rating:30V AC/DC
 Contact Resistance:20m ohm. max.
 Insulation Resistance:1,000M ohm. min.
 Withstanding Voltage:750V AC For One Minute
 Operating Temperature Range:-40°C to +105°C
 Material and Finish
 Insulator:High Temp. plastic.(LCP UL94V-0)
 Insulator Color:Black
 Contact:Phosphor Bronze
 Plating:Gold Plated on Contact area,
 Tin Plated on Solder tail.
 Shell:Brass,Tin Plated
 Packing:Tube
 How To Order
 5075BMR-05-SM



DETAIL A
 SCALE 2/1

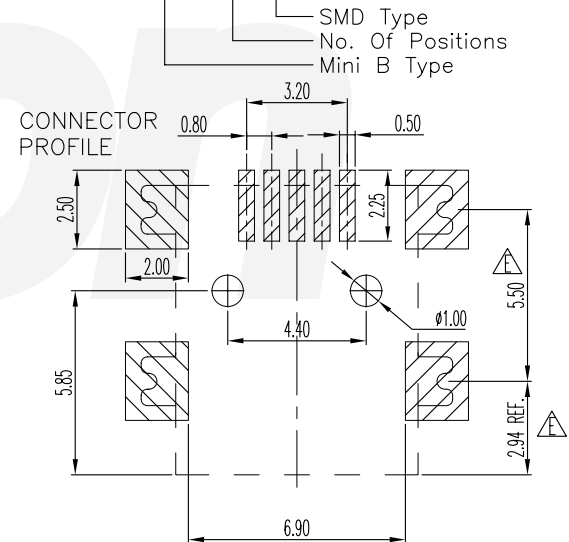


Recommended PCB Layout RoHS Compliant

REV	DATE	FILE	BY
D	28-Sep-2005	(PC0001)	Cel king
E	10-Jul-2007	ECN-CN070715	Andrew
F			

DRAWN:	Andrew
CHECKED:	Jeremy Liu
APPROVAL:	Mike Wu

GENERAL TOLERANCE:	.X=±0.20 .XX=±0.15
UNIT:	MM
SCALE:	1:1
SHEET:	1 / 1
PROJECTION:	



繼德工業股份有限公司
Neltron Industrial Co., Ltd.

DESCRIPTION:	Mini USB Socket 5P B Type
PART NO:	5075BMR-05-SM

SIZE	A4
------	-----------