

ORDER INFORMATION




SPECIFICATIONS

Current Rating: 2 AMP
 Insulation Resistance: 1000MΩ Min.
 Contact Resistance: 20mΩ Max.
 Dielectric Voltage: 500V AC for one minute
 Operation Temperature:-40°C to +105°C



MATERIAL

Insulator:Hi-Temp. Thermoplastic, UL94V-0, Black
 Contact Pin:Copper Alloy

5 P S 2 S D B 4 3 - 2 X X X X N N N X U - 0 0

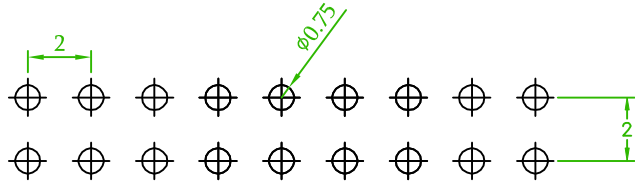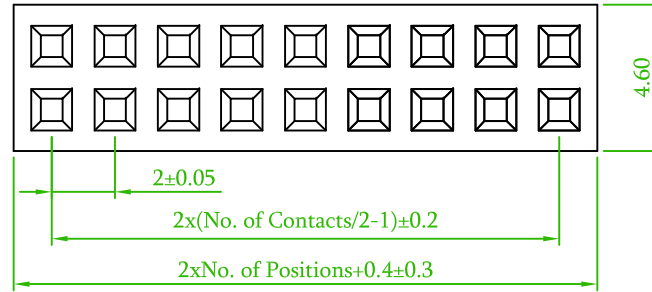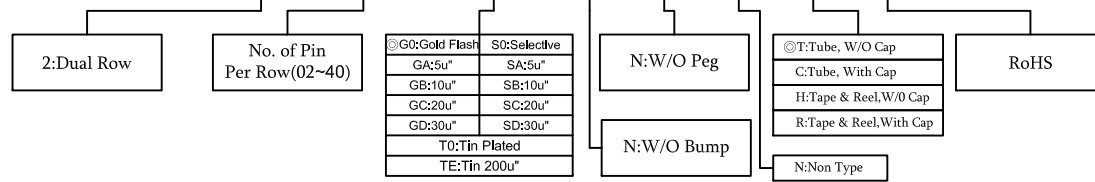

Recommended PCB Layout
 (PCB TOLERANCE ±0.1)

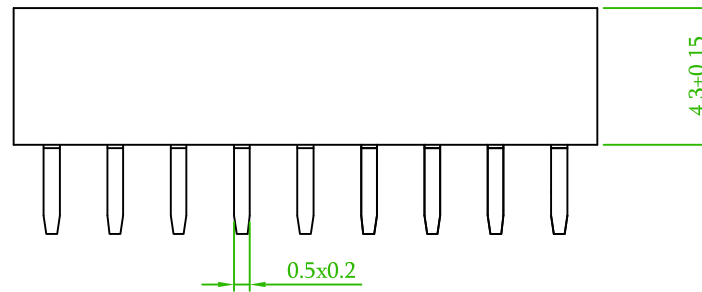

Old Part No. : PS2S43-2XX-U

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE
------	------------------------	---------	------

 耀德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	FEMALE HEADER 2.0mm D/R V/T DIP TYPE				頁數 Page	1/1
	品號 PART NO.	5PS2SDB43-2XXXXNXXU-00				繪圖 DRAWN	Joe 2010/09/21
	圖號 DRAWING NO.	GN005-RL172	版本 REV.	A	核對 CHECKED	Kelvin 2010/09/21	
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	James 2010/09/21	
	公差 TOLERANCE	.X ± 0.25 .XX ± 0.20	X°±3°	單位 UNIT	mm	THIRD ANGLE PROJECTION	