

718 Series / CAR FUSE



Operating Temperature

-25°C to +85°C (consider de-rating)

Storage Conditions

+10°C to +60°C

Relative humidity: ≤75% yearly average without dew, maximum 30 days at 95%



Vibration Resistance

24 cycles at 15 min. each (60068-6)

10-60Hz at 0.75mm amplitude

60-2000Hz at 10g acceleration

Dimensions (units in mm)

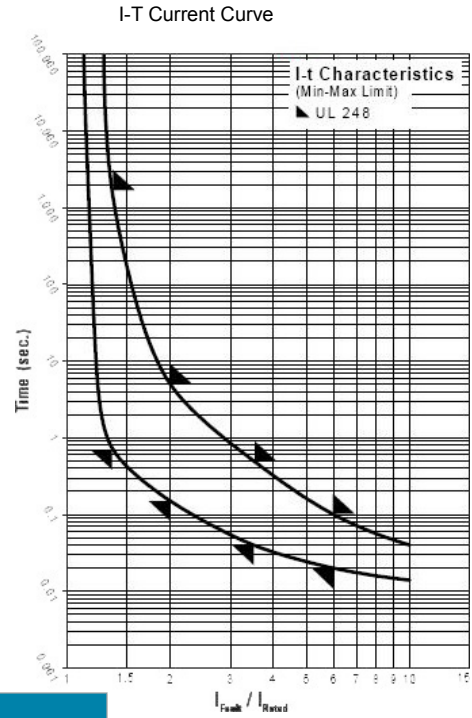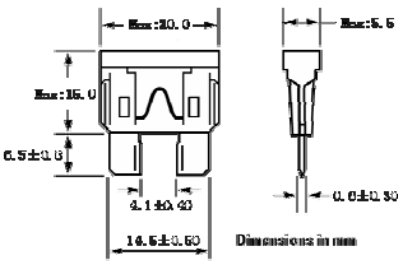

Time vs Current Characteristics:					
Rated Current	110%	135%	200%	350%	600%
5~40A	>100h	0.5~1800s	0.1~5s	20~500ms	<0.1s



Electrical Characteristics							
Amp Code	Rated Current	Max. Voltage	Resistance (Ω)	Breaking Capacity	Nominal Melting I ² T(A ² sec)	Body Color Code	Approvals
							cURus
1500	5.00A	32V DC	0.018	1000A@32V DC	26	Tan	•
1750	7.50A		0.011		60	Brown	•
2100	10.00A		0.0077		115	Red	•
2150	15.00A		0.0048		340	Blue	•
2200	20.00A		0.0033		520	Yellow	•
2250	25.00A		0.0025		1080	Natural	•
2300	30.00A		0.0019		1510	Green	•
2350	35.00A		0.0016		2280	Blue Green	•
2400	40.00A		0.0014		3310	Orange	•

Notes: Permissible continuous operating current is ≤100% at ambient temperature of 23°C (73.4°F)

Ordering Information

Series	Amp Code	Supplementary Code	Qty
718			