


SPECIFICATION

Current:1.0A Max
 Voltage:30V Max
 Withstanding Voltage:750V AC
 Contact Resistance:30 Milliohms Max
 Insulation Resistance:1000 Megaohms Min
 Temperature Range:-55°C ~ +85°C
 Mating Force:45N Max
 Withdrawal Force:7N Min
 Durability:500 Cycles Min
 Contacts:Brass,Gold Flash And Nickel Plated Over All
 Insulator:PBT+30%G.F UL94V-0
 Shell:Brass,Nickel Over All Plating
 RoHS Compliant

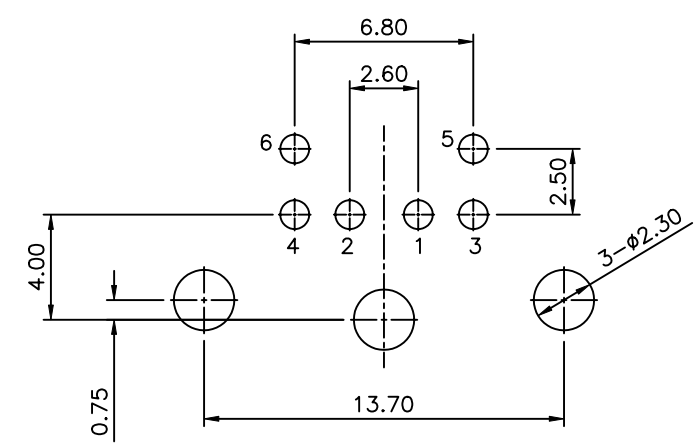

Recommended P.C.B Layout

P/N	Insulator Color
MDJ06F-H	Black
MDJ06F-PP-H	Purple
MDJ06F-GR-H	Green

AUK A MEMBER OF AUK GROUP
太聯事業股份有限公司
AUK CONTRACTORS CO., LTD.

CATEGORY		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.38 .X° ±2° .XX ±0.25 .XX° ±1° .XXX ±0.13 .XXX° ±0.5°						
PART No. MDJ06F-XX-H		MEI								
DRAWING No. MDJ06F-XX-H		CHECKED BY								
		HZF								
		DRAWING BY								
		XYH								
SCALE	NONE	REV.	A0	UNIT	mm	NO.	REV.	NEW RELEASE	HZF	07/21/2008
								REVISIONS	CHK	DATE