

**FEATURES**

- ※ Side actuation
- ※ Gold contact for high reliability
- ※ Red, blue, and black color options.


**APPLICATION**

- ※ Industrial control
- ※ Computers and peripherals
- ※ Variety of function controls

**SPECIFICATION**

Contact Rating	25mA, 24V DC
Contact Resistance	50mΩ max.
Insulation Resistance	100MΩ min. 500V DC
Dielectric Strength	500V AC/1 minute
Operating Force	1,000gf max.
Travel	2mm
Operating Life	2,000 cycles
Operating Temp.	-20°C ~ +70°C
Storage Temp.	-40°C ~ +85°C

**CIRCUIT**

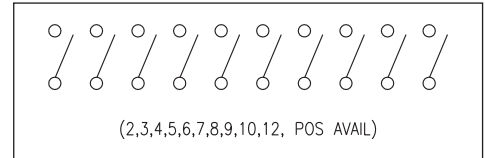


**PACKAGE**




**<Tube>**

DA-02: 73pcs	DA-02-T: 70 pcs
DA-03: 52pcs	DA-03-T: 50 pcs
DA-04: 40pcs	DA-04-T: 39 pcs
DA-05: 33pcs	DA-05-T: 32 pcs
DA-06: 28pcs	DA-06-T: 28 pcs
DA-07: 24pcs	DA-07-T: 24 pcs
DA-08: 21pcs	DA-08-T: 21 pcs
DA-09: 19pcs	DA-09-T: 19 pcs
DA-10: 17pcs	DA-10-T: 17 pcs
DA-12: 14pcs	DA-12-T: 14 pcs


**HOW TO ORDER**

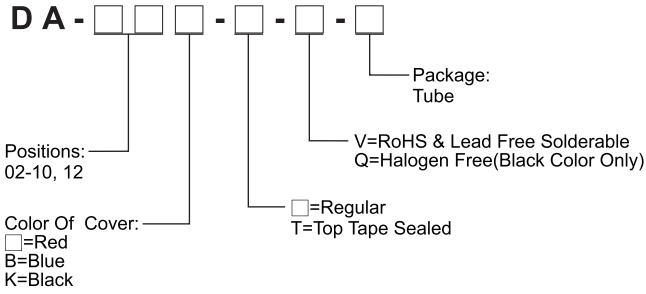

**DA**

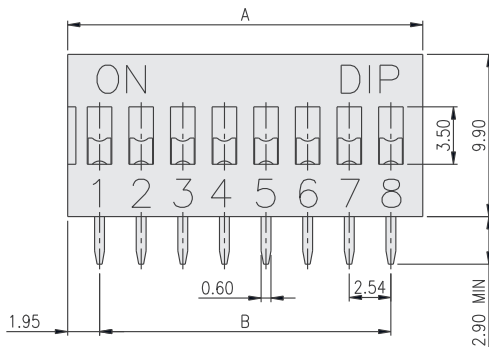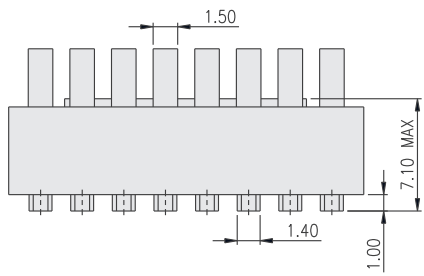

PART NO.	NO.OF POS.	DIM.A	DIM.B
DA-02	2	6.44	2.54
DA-03	3	8.98	5.08
DA-04	4	11.52	7.62
DA-05	5	14.06	10.16
DA-06	6	16.60	12.70
DA-07	7	19.14	15.24
DA-08	8	21.68	17.78
DA-09	9	24.22	20.32
DA-10	10	26.76	22.86
DA-12	12	31.84	27.94

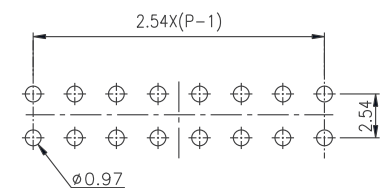

P.C.B. LAYOUT